

**TRACK CONDITIONS**

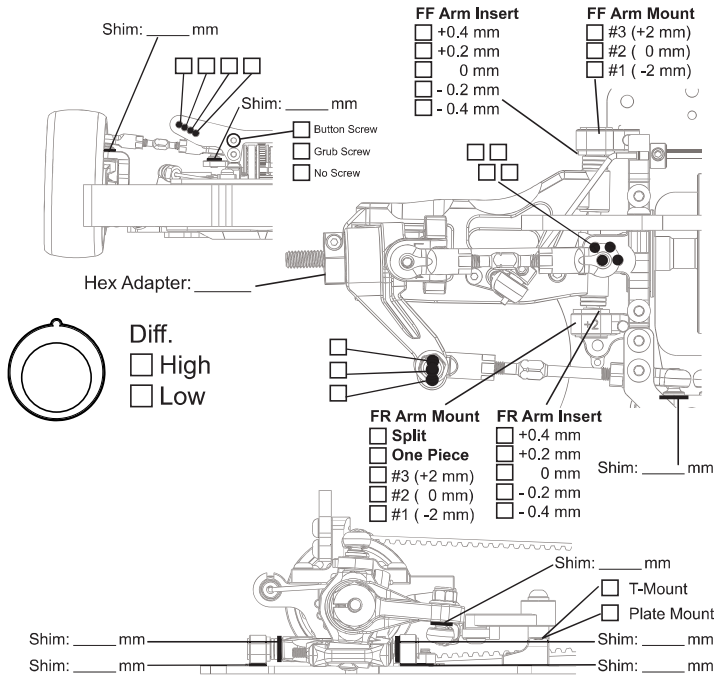
Type : ☐ Carpet ☐ Asphalt
 Place : ☐ Indoor ☐ Outdoor
 Surface : ☐ Smooth ☐ Med. ☐ Bumpy

Note: _____

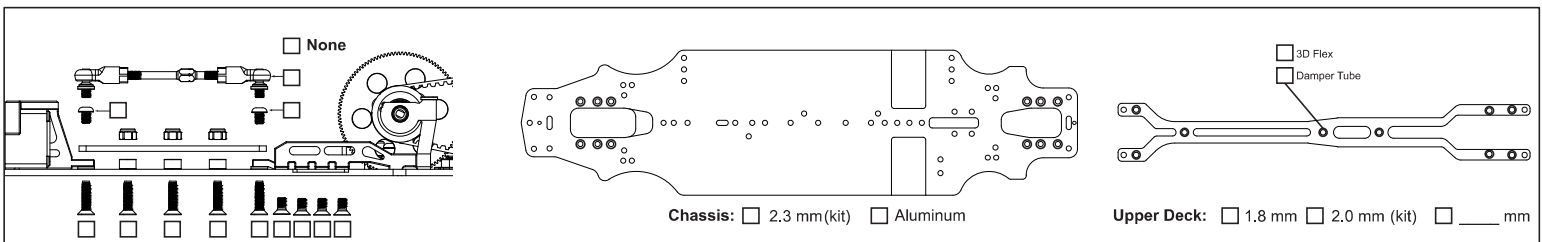
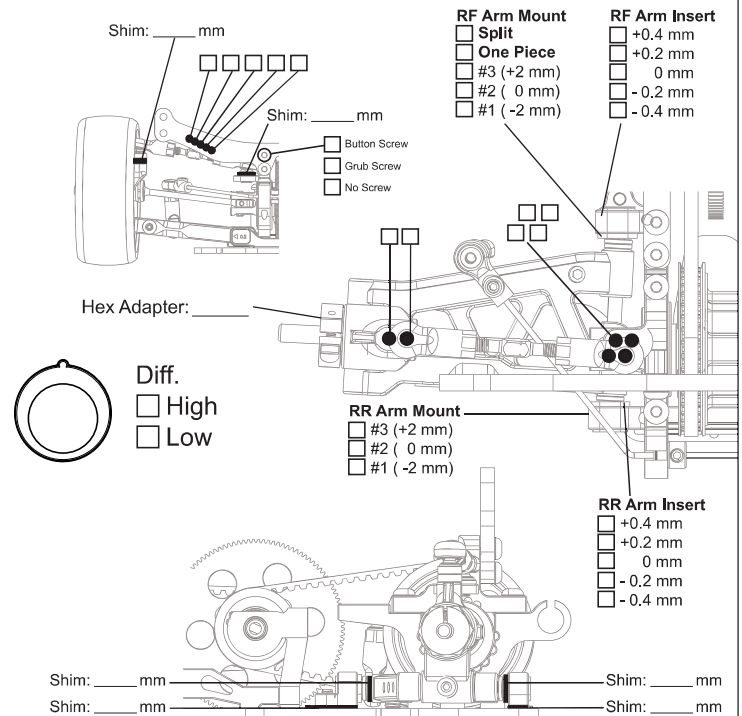
Size: ☐ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☐ Med. ☐ Low
 Track Temp/Air Temp: _____ / _____

FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____
 Toe Angle: _____ ° ☐ Spool _____
 Caster: _____ °
 Camber: _____ °
 Ride Height: _____ mm Anti-Roll Bar: _____ mm
 Down Stop: _____ mm

**REAR SUSPENSION**

Track Width: _____ mm Gear Diff _____
 Toe Angle: _____ °
 Camber: _____ °
 Ride Height: _____ mm
 Down Stop: _____ mm Anti-Roll Bar: _____ mm

**ELECTRONICS**

Servo: _____
 ESC: _____
 Battery: _____

MOTOR

Brand: _____
 Turns: _____
 Timing: _____

ESC



Punch: _____
 Initial Brake: _____
 Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO

Spur _____ T
 Pinion _____ T X1.9= _____

TIRES

Insert: _____
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
 Treated Area

**SHOCKS**

Hole Size: F _____ R _____
 Holes In Piston: F _____ R _____
 Shock Oil: F _____ R _____
 Shock Springs: F _____ R _____
 Shock Rebound: F _____ R _____
 Bladder Note: _____
 Thread Length: F _____ R _____
 Shock Length: F _____ R _____

BODY