




TRACK CONDITIONS

Type : ☐ Carpet ☒ Asphalt
 Place : ☐ Indoor ☒ Outdoor
 Surface : ☐ Smooth ☒ Med. ☐ Bumpy
 Size: ☒ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: 35 / 25

Note: Final setup for final, higher performance level than qualis.



FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☒ Spool
 Caster: 4 °
 Camber: 2 °
 Ride Height: 5.0 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 31.2 mm

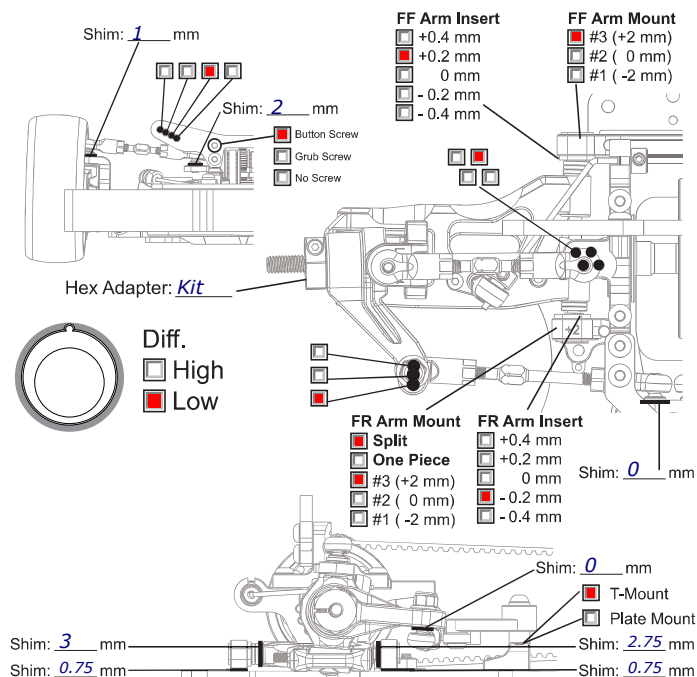

REAR SUSPENSION

Track Width: _____ mm Gear Diff 4'000 wt
 Toe Angle: 3 °
 Camber: 2 °
 Ride Height: 5.2 mm
 Down Stop: 30.8 mm Anti-Roll Bar: Ø 1.2 mm

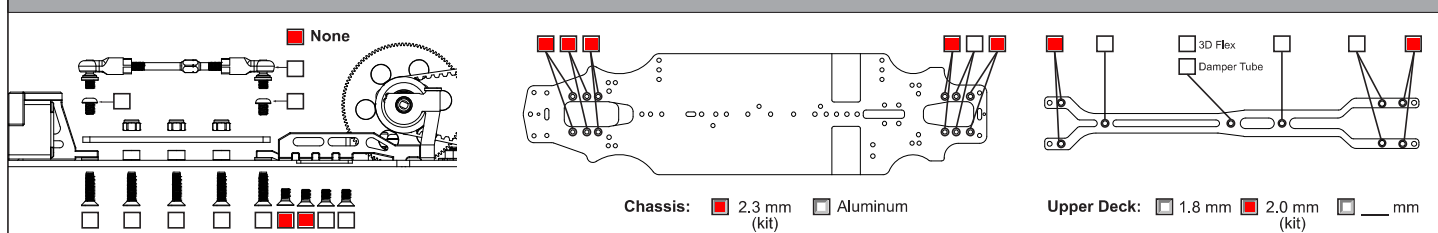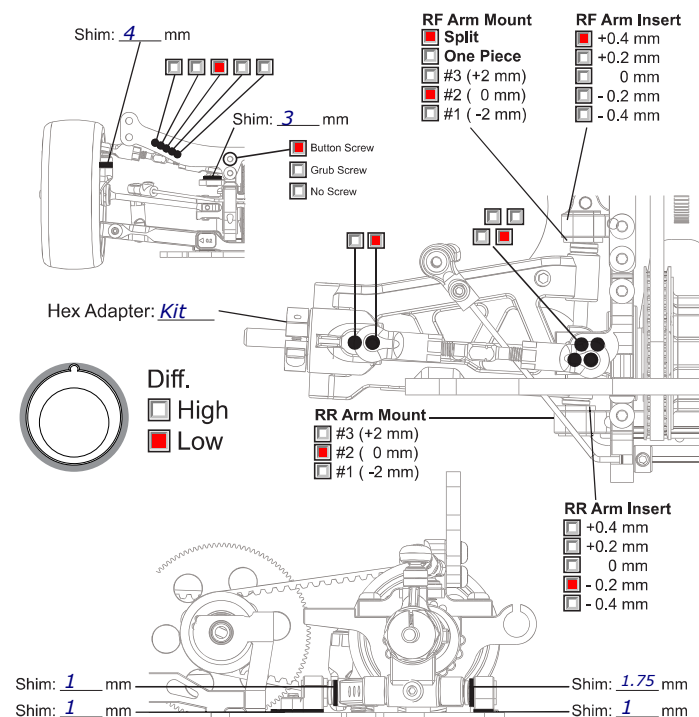

ELECTRONICS

Servo: HRC68113DBL

ESC: MuchMore

Battery: MuchMore

MOTOR

Brand: MuchMore

Turns: 4.5

Timing: _____

ESC

Punch: _____

Initial Brake: _____

Drag Brake: _____

☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO

Spur 79 T
 Pinion 20 T $\times 1.9 =$ 7.51

TIRES

Insert: Sweep 36 SRCCA

Wheel: _____


Shore/deg: _____

Compound: Sweep 36 SRCCA


Tire Temp: 70

Tire additive: SRCCA 10 mins

Treated Area



SHOCKS



Hole Size: F 1.2 R 1.2

Holes In Piston: F 4 R 4

Shock Oil WT: F 600 R 600

Shock Springs: F P2.7 R P2.9

Shock Rebound: F 0 R 0

Bladder Note: _____

Thread Length: F _____ R _____

Shock Length: F _____ R _____

BODY

Body Position: _____ Body: Protoform LTC-R

Wing Height: max

Wing Position: max