




TRACK CONDITIONS

Type : ☒ Carpet ☐ Asphalt
 Place : ☒ Indoor ☐ Outdoor
 Surface : ☐ Smooth ☒ Med. ☐ Bumpy
 Size: ☐ Open ☐ Med. ☒ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: 18 / 18

Note: Fastest car on this day



FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☒ Spool
 Caster: 4 °
 Camber: 2 °
 Ride Height: 5 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.8 mm

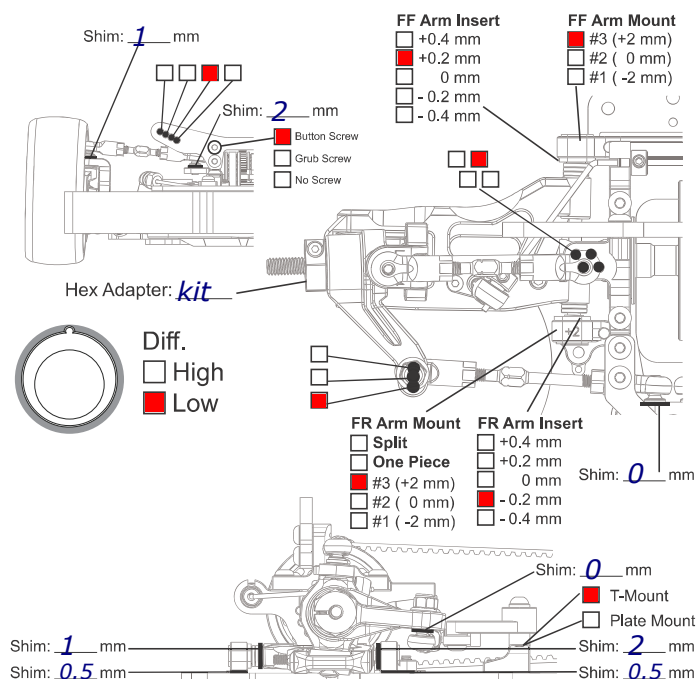

REAR SUSPENSION

Track Width: _____ mm Gear Diff 6000 wt
 Toe Angle: 3 °
 Camber: 2.5 °
 Ride Height: 5.2 mm
 Down Stop: 4.8 mm Anti-Roll Bar: Ø 1.2 mm

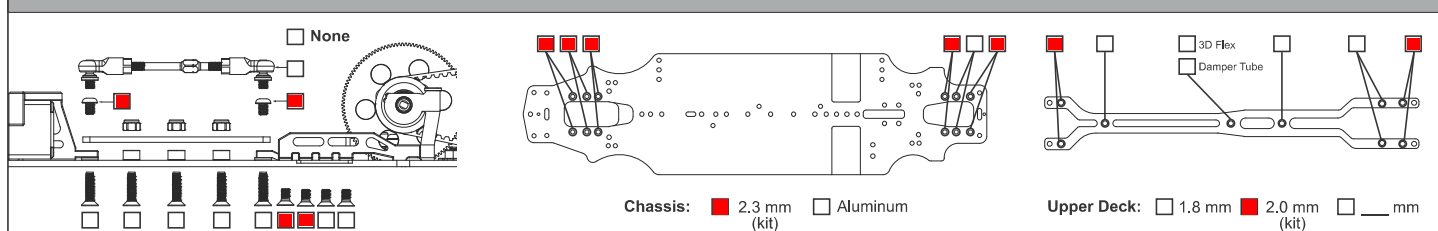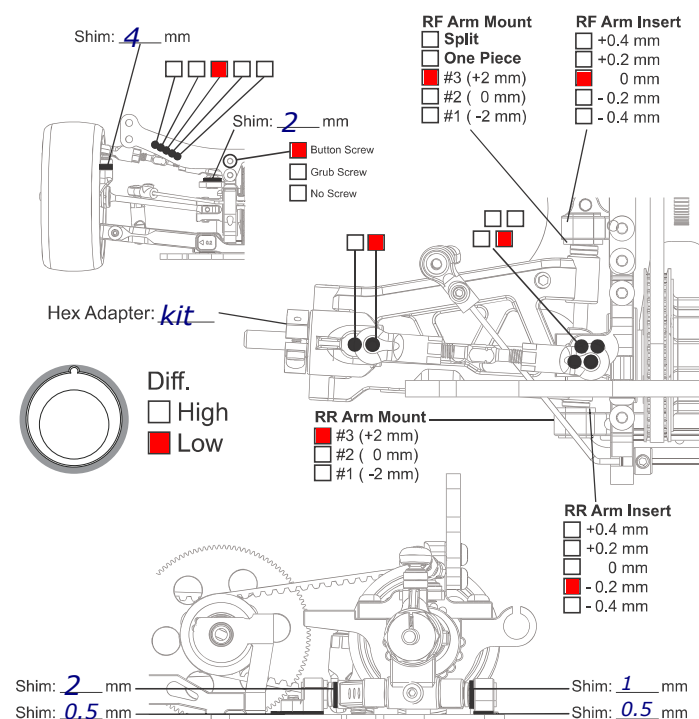

ELECTRONICS

Servo: HRC BL Low
 ESC: Muchmore
 Battery: Muchmore

MOTOR

Brand: _____
 Turns: 7.5
 Timing: 20

ESC

Punch: 2
 Initial Brake: 8
 Drag Brake: 8
☒ ESC Timing ☒ Turbo Timing
2 40


DRIVE RATIO

Spur 79 T
 Pinion 21 T $\times 1.9 =$ 7.15


TIRES

Insert: _____
 Wheel: Volante
 Shore/deg: 28
 Compound: _____
 Tire Temp: _____
 Tire additive: HRC

Treated Area



SHOCKS

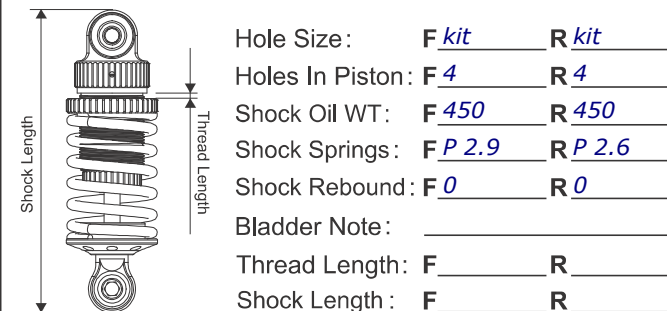

BODY

