




TRACK CONDITIONS

Type : ☒ Carpet ☐ Asphalt Size: ☐ Open ☐ Med. ☒ Tight
 Place : ☒ Indoor ☐ Outdoor Traction: ☐ High ☒ Med. ☐ Low
 Surface: ☐ Smooth ☐ Med. ☒ Bumpy Track Temp/Air Temp: _____ / 18

Note: (must try rear anti roll bar 1.3) = Perfect = Track Record 9.438



FRONT SUSPENSION

Track Width: 189 mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☒ Spool
 Caster: 4 °
 Camber: 1.5 °
 Ride Height: 5.0 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.4 mm

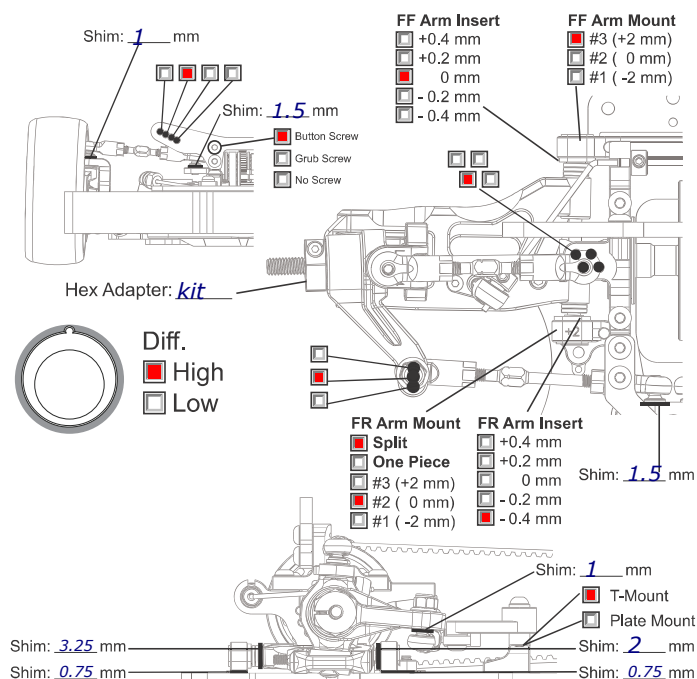

REAR SUSPENSION

Track Width: 186 mm Gear Diff _____ wt
 Toe Angle: 2.7 °
 Camber: 1.5 °
 Ride Height: 5.2 mm
 Down Stop: 5 mm Anti-Roll Bar: Ø 1.2 mm

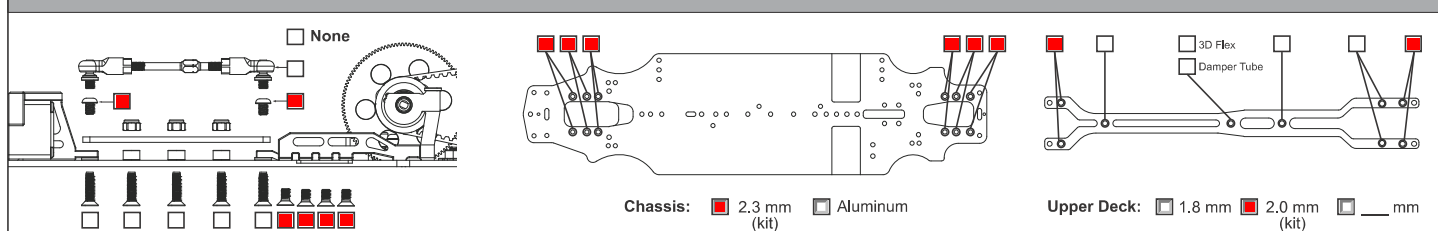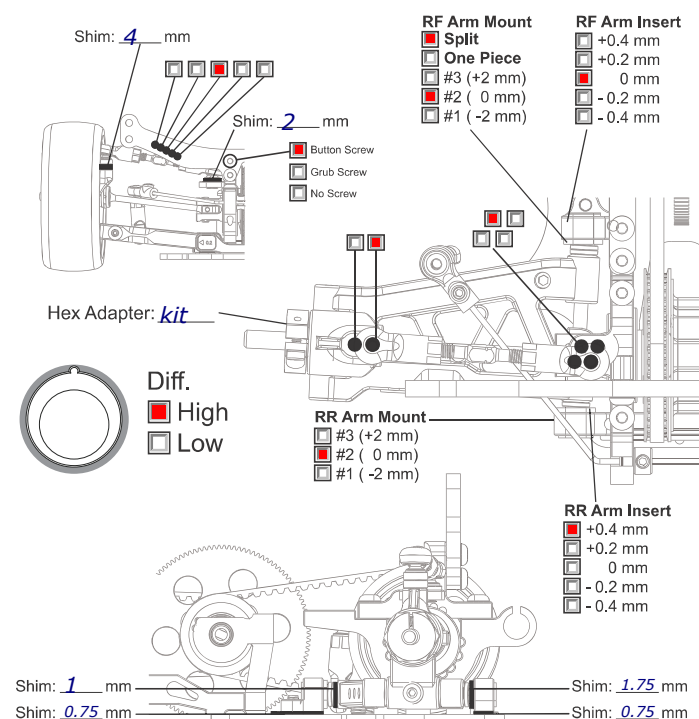

ELECTRONICS

Servo: KO
 ESC: Hobbywing XR10 Pro
 Battery: Orion 5800

MOTOR

Brand: Hobbywing
 Turns: 13.5 T
 Timing: 30

ESC


Punch: 30
 Initial Brake: = Drag Brake
 Drag Brake: 8
☒ ESC Timing ☒ Turbo Timing
50 10

DRIVE RATIO


Spur 100 T
 Pinion 26 T $\times 1.9 =$ 7.31

TIRES

Insert: _____
 Wheel: Muchmore Volante
 Shore/deg: 28
 Compound: _____
 Tire Temp: _____
 Tire additive: CS High Grip
 Treated Area



SHOCKS

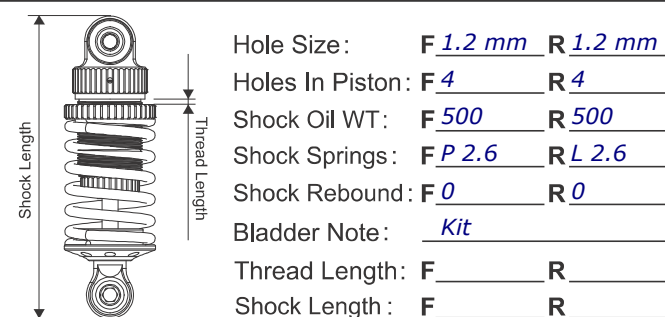

BODY

