




TRACK CONDITIONS

Type : ☐ Carpet ☒ Asphalt
 Place : ☐ Indoor ☒ Outdoor
 Surface : ☐ Smooth ☒ Med. ☐ Bumpy
 Size: ☒ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: 50 / 27
 Note: _____





FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☒ Spool
 Caster: 4 °
 Camber: 2 °
 Ride Height: 5 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.8 mm

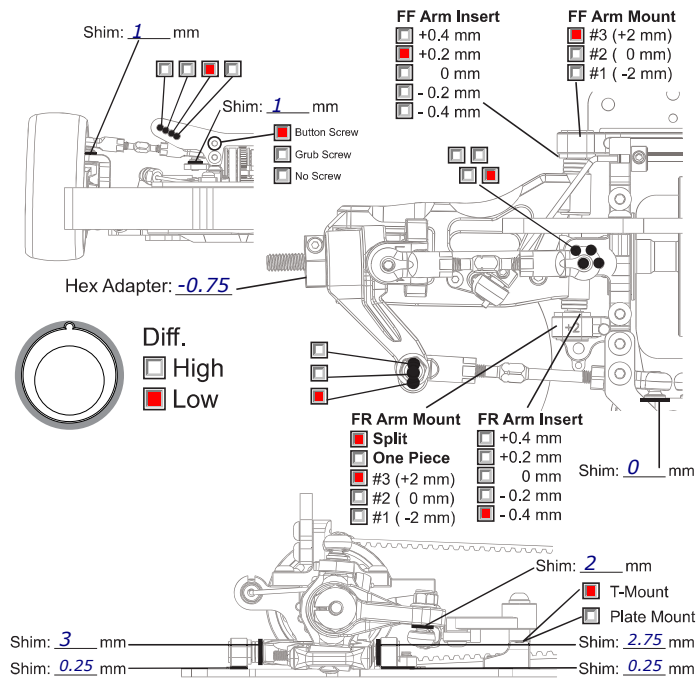

REAR SUSPENSION

Track Width: _____ mm Gear Diff 10K wt
 Toe Angle: _____ °
 Camber: 2 °
 Ride Height: 5.2 mm
 Down Stop: 4.8 mm Anti-Roll Bar: Ø 1.2 mm

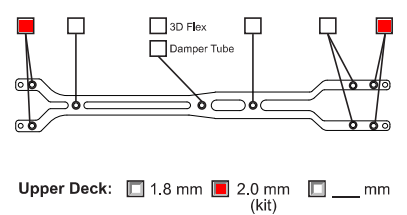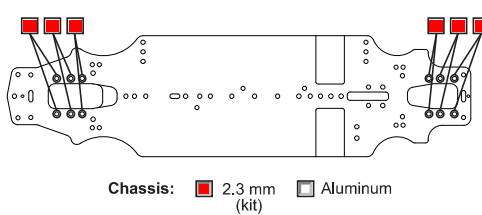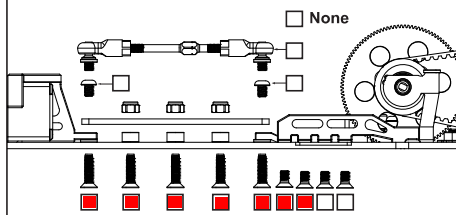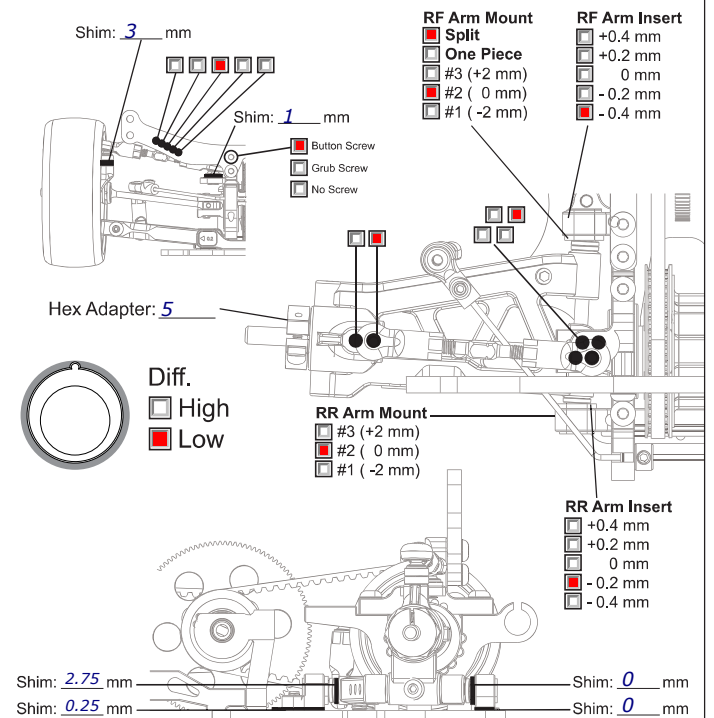

ELECTRONICS

Servo: Sanwa
 ESC: HobbyWing
 Battery: EZ Power

MOTOR

Brand: HobbyWing
 Turns: 4.5
 Timing: 25

ESC

Punch: 2
 Initial Brake: 0
 Drag Brake: 14
☒ ESC Timing ☒ Turbo Timing
9° 40°


DRIVE RATIO

Spur 110 T
 Pinion 30 T X1.9= 6.97


TIRES

Insert: Volante
 Wheel: _____
 Shore/deg: 36R
 Compound: _____
 Tire Temp: 60°C
 Tire additive: MR33

Treated Area




SHOCKS



Hole Size: F 1.1 R 1.1
 Holes In Piston: F 3 R 3
 Shock Oil WT: F 350 R 400
 Shock Springs: F P2.7 R P2.9
 Shock Rebound: F 0 R 0
 Bladder Note: _____
 Thread Length: F _____ R _____
 Shock Length: F _____ R _____

BODY



Body: LTC-R Light
 Wing Height: -1
 Wing Position: +8