




TRACK CONDITIONS

Type : ☐ Carpet ☒ Asphalt Size: ☐ Open ☒ Med. ☐ Tight
 Place : ☐ Indoor ☒ Outdoor Traction: ☐ High ☐ Med. ☒ Low
 Surface: ☒ Smooth ☐ Med. ☐ Bumpy Track Temp/Air Temp: 20 / 20
 Note: _____



FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt
 Toe Angle: +0.75 ° ☒ Spool
 Caster: 4 °
 Camber: 1.5 °
 Ride Height: 5.2 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.8 mm

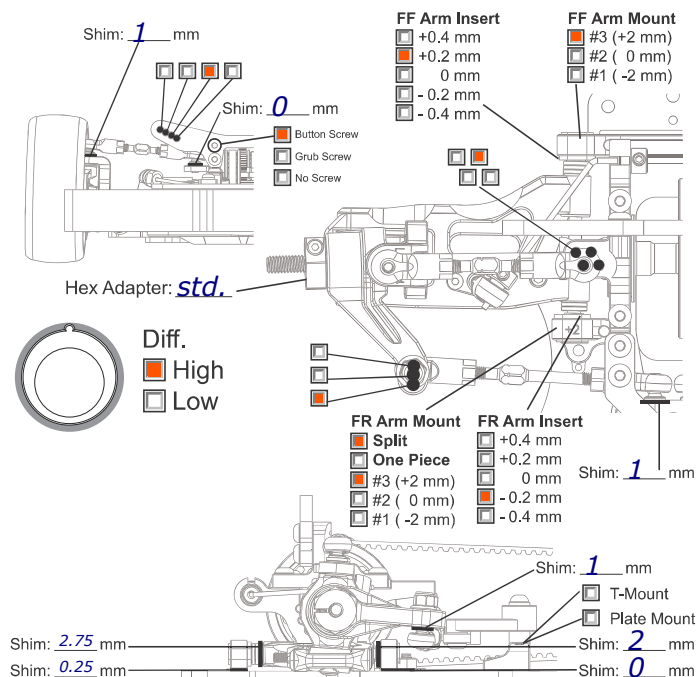

REAR SUSPENSION

Track Width: _____ mm Gear Diff 3000 wt
 Toe Angle: 2.2 °
 Camber: 2 °
 Ride Height: 5.4 mm
 Down Stop: 5.0 mm Anti-Roll Bar: Ø 1.3 mm

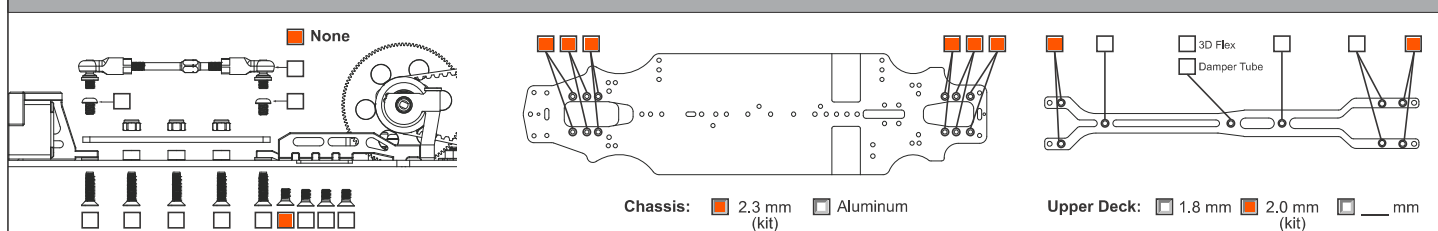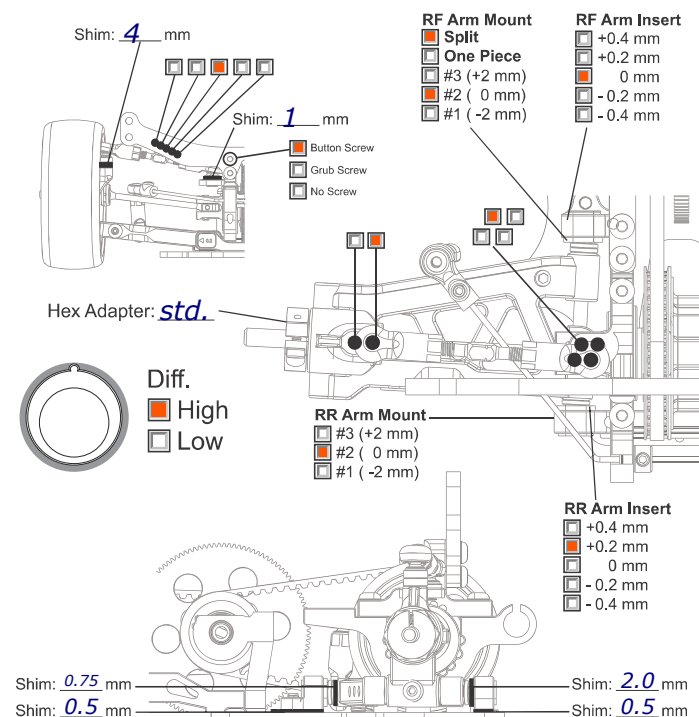

ELECTRONICS

Servo: HRC
 ESC: Orion
 Battery: EZ HV

MOTOR

Brand: MuchMore
 Turns: 13.5
 Timing: Fixed

ESC


Punch: max.
 Initial Brake: -
 Drag Brake: -
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO


Spur 74 T
 Pinion 31 T $\times 1.9 = 4.54$

TIRES

Insert: Volante 36R
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: 55
 Tire additive: HRC
 Treated Area



SHOCKS

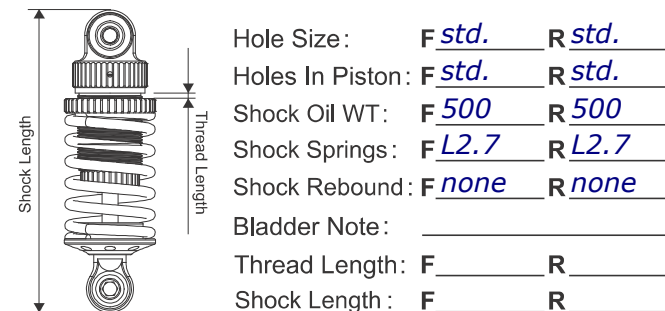

BODY

Body Position: _____ Body: Mon-tech Racer
 Wing Height: 37x17
 Wing Position: _____