




TRACK CONDITIONS

Type : ☒ Carpet ☐ Asphalt
 Place : ☒ Indoor ☐ Outdoor
 Surface : ☐ Smooth ☒ Med. ☐ Bumpy
 Size: ☐ Open ☒ Med. ☐ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: _____ / _____

Note: Setup by Lionel Troyon - with pre-production alu chassis



FRONT SUSPENSION

Track Width: _____ mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☒ Spool
 Caster: 4 °
 Camber: 1.8 °
 Ride Height: 5.0 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.8 mm

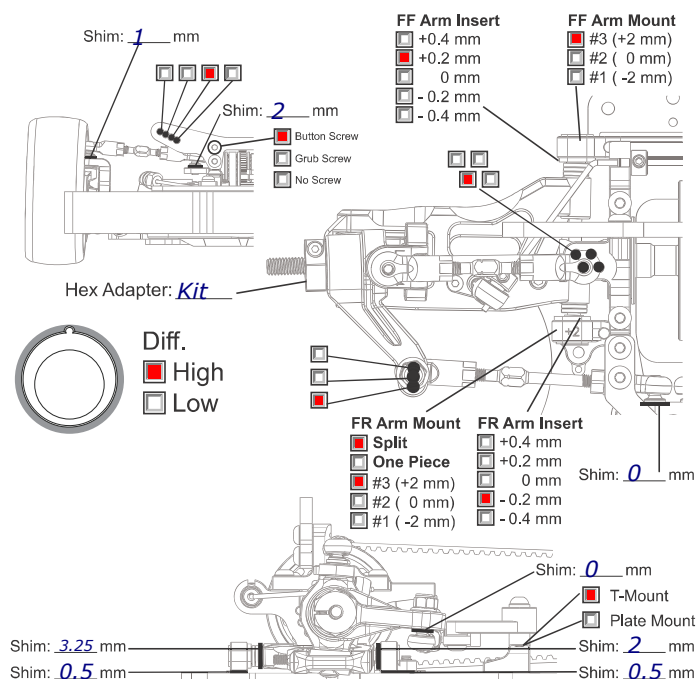

REAR SUSPENSION

Track Width: _____ mm Gear Diff 7'000 wt
 Toe Angle: 2.7 °
 Camber: 1.5 °
 Ride Height: 5.2 mm
 Down Stop: 4.6 mm Anti-Roll Bar: Ø 1.2 mm

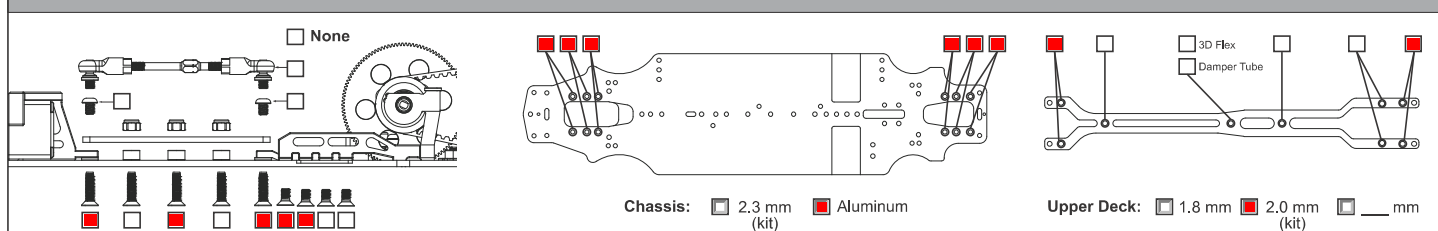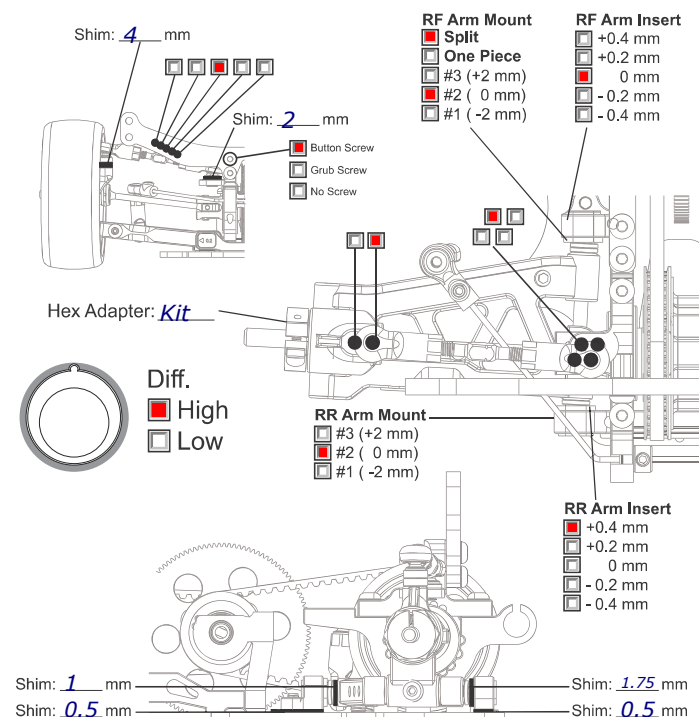

ELECTRONICS

Servo: _____
 ESC: _____
 Battery: _____

MOTOR

Brand: _____
 Turns: 5.5
 Timing: _____

ESC


Punch: _____
 Initial Brake: _____
 Drag Brake: _____
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO


Spur 0 T X1.9= 0.00
 Pinion 0 T

TIRES

Insert: _____
 Wheel: _____
 Shore/deg: _____
 Compound: Volante
 Tire Temp: _____
 Tire additive: CS
 Treated Area



SHOCKS

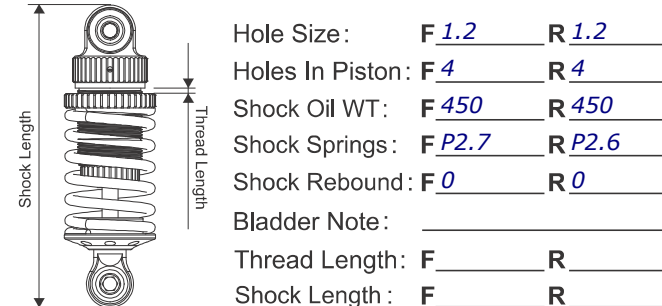

BODY

