




TRACK CONDITIONS

Type : ☐ Carpet ☒ Asphalt
 Place : ☐ Indoor ☒ Outdoor
 Surface: ☒ Smooth ☐ Med. ☐ Bumpy
 Note: _____

Size: ☐ Open ☒ Med. ☐ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: 35 / 26




FRONT SUSPENSION

Track Width: bk mm ☐ Gear Diff _____ wt
 Toe Angle: 0.5 ° ☐ One Way
 Caster: 4.0 ° ☒ Spool
 Camber: 0.5 °
 Ride Height: 5.2 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5.5 mm

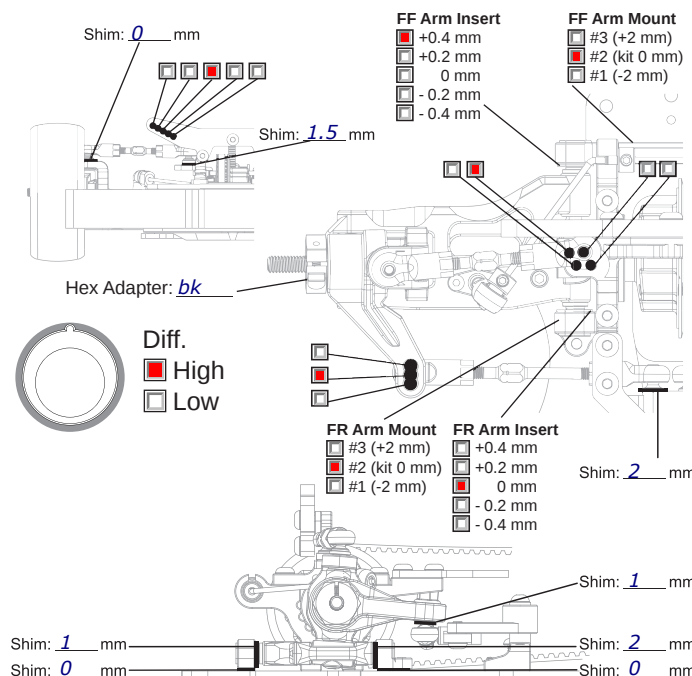


REAR SUSPENSION

Track Width: bk mm ☐ Gear Diff 4000 wt
 Toe Angle: 2.7 °
 Camber: 0.5 °
 Ride Height: 5.4 mm
 Down Stop: 4.5 mm Anti-Roll Bar: Ø 1.2 mm

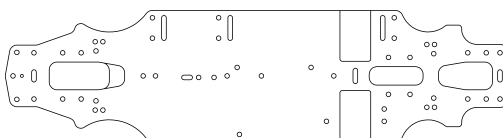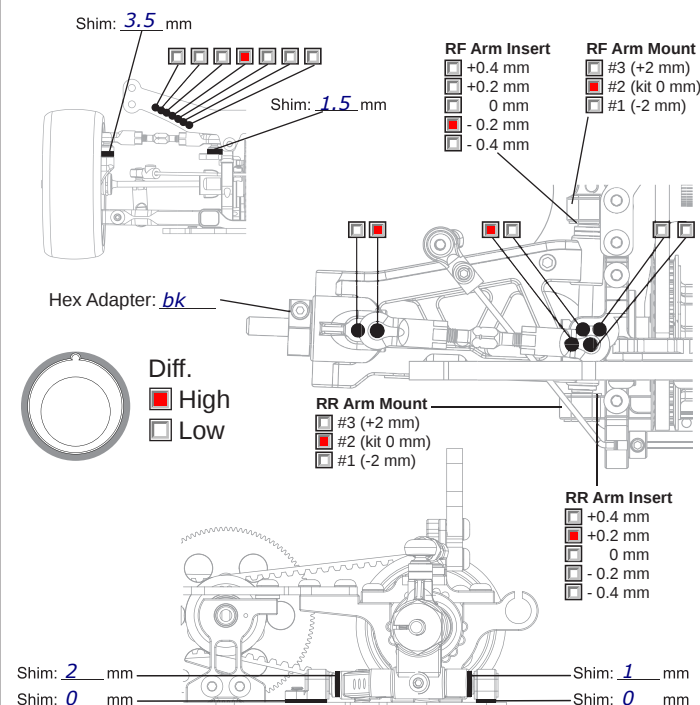

Chassis: ☐ 2.3 mm ☒ 2.5 mm ☐ Aluminum

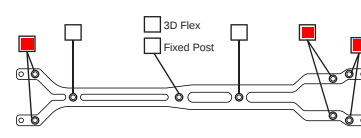

Upper Deck: ☒ 2 mm ☐ 2.3 mm ☐ 2.5 mm

ELECTRONICS

Servo: HRC Low Profil
 ESC: Muchmore Fleta
 Battery: Muchmore 6200

MOTOR

Brand: Muchmore
 Turns: 13.5
 Timing: 0

ESC


Punch: 12
 Initial Brake: 0
 Drag Brake: 0
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO


Spur 79 T
 Pinion 30 T $\times 1.9 =$ 5.00

TIRES

Insert: Volante
 Wheel: _____
 Shore/deg: _____
 Compound: _____
 Tire Temp: _____
 Tire additive: _____
 Treated Area



SHOCKS



Hole Size: F bk R bk
 Holes In Piston: F bk R bk
 Shock Oil WT: F 40 R 40
 Shock Springs: F MR33 red R MR33 red
 Shock Rebound: F 25% R 25%
 Bladder Note: _____
 Thread Length: F R
 Shock Length: F R

BODY

