

SETUP SHEET




TRACK CONDITIONS

Type : ☐ Carpet ☒ Asphalt
 Place : ☐ Indoor ☒ Outdoor
 Surface : ☐ Smooth ☒ Med. ☐ Bumpy
 Size: ☒ Open ☐ Med. ☐ Tight
 Traction: ☐ High ☒ Med. ☐ Low
 Track Temp/Air Temp: 20 / 20

Note: Pro Stock Class - Best Lap : 22.248



FRONT SUSPENSION

Track Width: 187 mm ☐ Gear Diff _____ wt
 Toe Angle: 1 ° ☐ One Way
 Caster: 4 ° ☒ Spool
 Camber: -2 °
 Ride Height: 5.2 mm Anti-Roll Bar: Ø 1.3 mm
 Down Stop: 5 mm

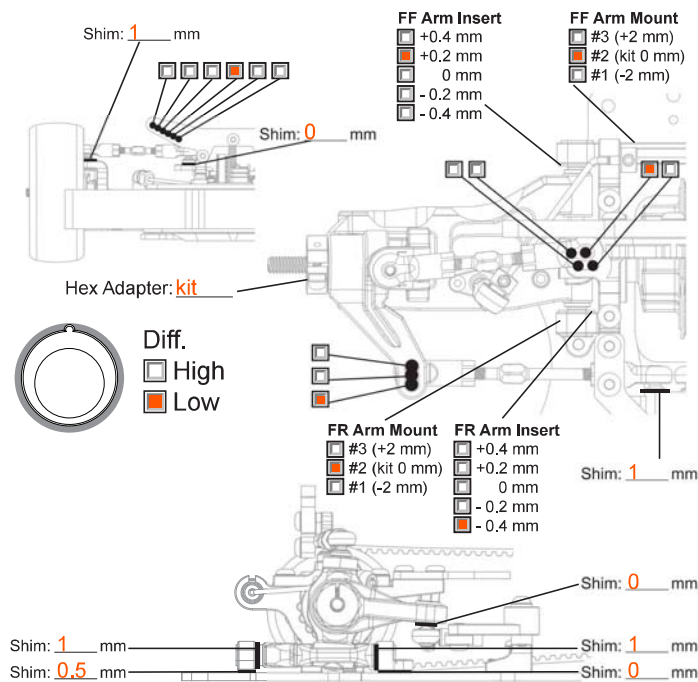

REAR SUSPENSION

Track Width: 185.5 mm ☒ Gear Diff 5000 wt
 Toe Angle: -1.6 °
 Camber: -2.3 °
 Ride Height: 5.6 mm
 Down Stop: 4.5 mm Anti-Roll Bar: Ø 1.2 mm

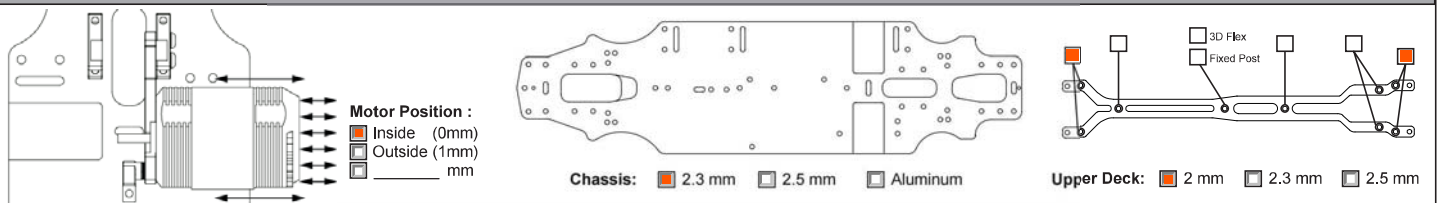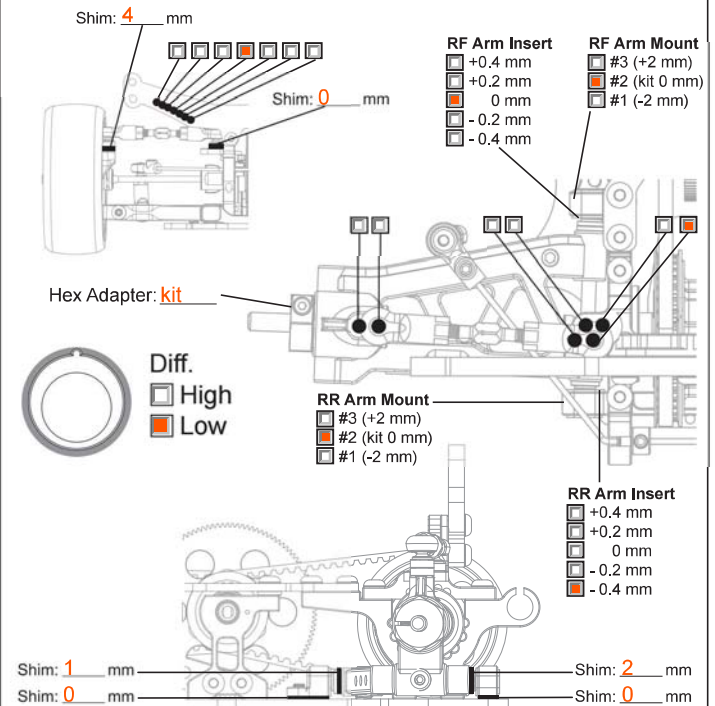

ELECTRONICS

Servo: Ko BSX-2 Response
 ESC: Muchmore Handout
 Battery: Orion 7200

MOTOR

Brand: Muchmore Handout
 Turns: 13.5
 Timing: 0

ESC


Punch: 9
 Initial Brake: 0
 Drag Brake: 0
☐ ESC Timing ☐ Turbo Timing

DRIVE RATIO


Spur 102 T
 Pinion 43 T X1.9 = 4.51

TIRES

Insert: Ride
 Wheel: Ride
 Shore/deg: 34
 Compound:
 Tire Temp: 45
 Tire additive: Hudy ETS
 Treated Area



SHOCKS

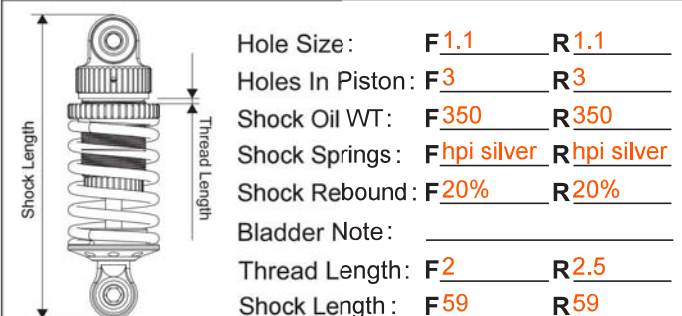

BODY

