



Name: TRANS-AM Date: 7/11/9 Track: Memphis
 Condition: Sealed VHT Temperature: T = 120° Air = 93°
☒ Rubber Asphalt Edition ☐ Foam Carpet Edition

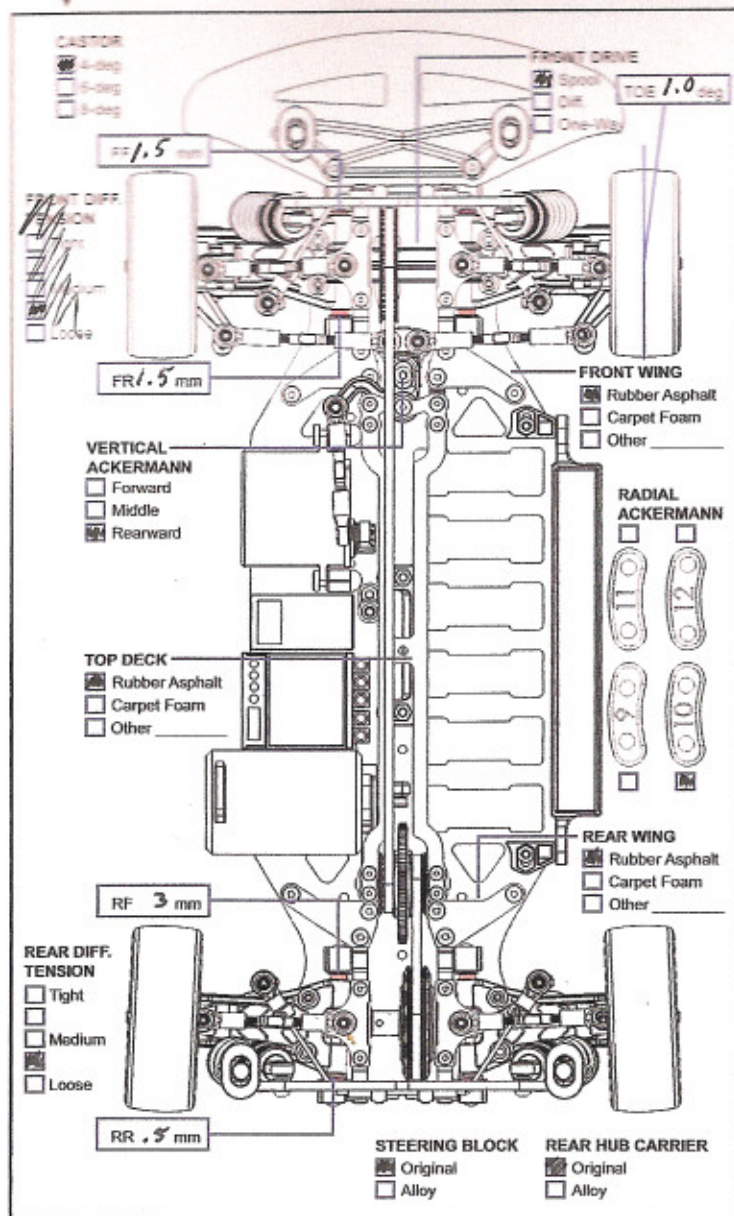

FRONT MEASUREMENTS		FRONT SHOCKS	
RIDE HEIGHT	5.5 mm	OIL WEIGHT	40 wt
CAMBER ANGLE	1 deg	PISTON	Standard/Optional
DROOP	5.5 mm	BLADDER	Std
WHEEL HUBS	6.0 mm	SPRING	324
WHEEL SPACER	mm	NOTE	258 Reb.

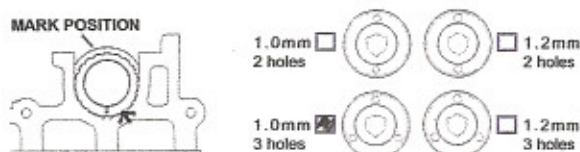

REAR MEASUREMENTS		REAR SHOCKS	
RIDE HEIGHT	5.8 mm	OIL WEIGHT	35 wt
CAMBER ANGLE	1.5 deg	PISTON	Standard/Optional
DROOP	1 mm	BLADDER	Std
WHEEL HUBS	Std mm	SPRING	289
WHEEL SPACER	mm	NOTE	258 Reb.

MOTOR	21.5
SPUR GEAR	100
PINION GEAR	47
BATTERY	TP 5000
BODY SHELLS	Cuda
WING	NA
ESC SETTING	1, 7, 6, 4

LRP

	FRONT	REAR
BRAND	HPR	HPR
COMPOUND		
INSERT		
WHEEL		
TIRE TREATMENT	Tweak	Tweak

