




Name: _____ Date: _____ Air Temp: _____


Track: _____ Country: _____ Track Temp: _____

Track Condition: _____

Qualify: _____ Main: _____ Finish: _____ Fastest lap: _____

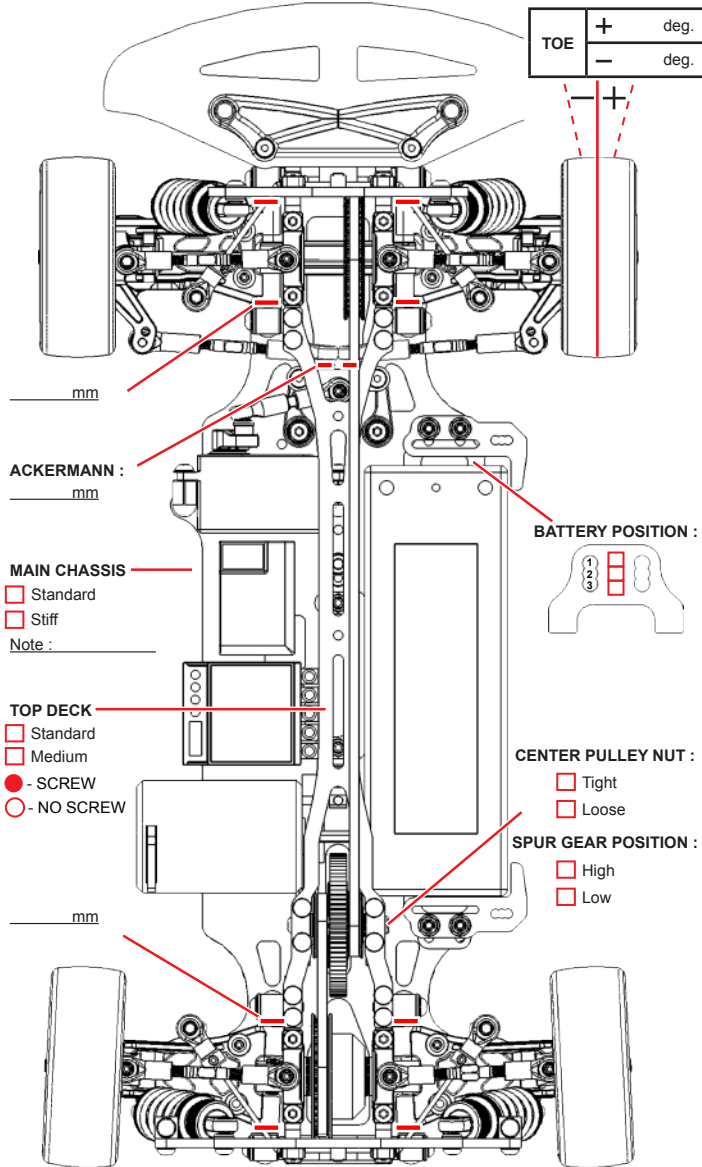
FRONT DRIVE ☐ Spool ☐ Gear Diff. ☐ Ball Diff. ☐ One-Way Note: _____REAR DRIVE ☐ Gear Diff. ☐ Ball Diff. Note: _____

FRONT MEASUREMENTS




TENSION

FRONT SHOCKS

☐ Standard ☐ Optional


RIDE HEIGHT	mm	OIL WEIGHT	wt / cst
CAMBER ANGLE	deg	BLADDER	
DOG BONE	mm	SPRING	
WHEEL HUBS	mm		
WHEEL SPACER	mm		

REAR MEASUREMENTS



TENSION


REAR SHOCKS

☐ Standard ☐ Optional

RIDE HEIGHT	mm	OIL WEIGHT	wt / cst
CAMBER ANGLE	deg	BLADDER	
DOG BONE	mm	SPRING	
WHEEL HUBS	mm		
WHEEL SPACER	mm		

MOTOR	FRONT	REAR
SPUR GEAR	BRAND	
PINION GEAR	COMPOUND	
BATTERY	INSERT	
BODY SHELLS	WHEEL	
WING	TIRE TREATMENT	
ESC SETTING		

FRONT

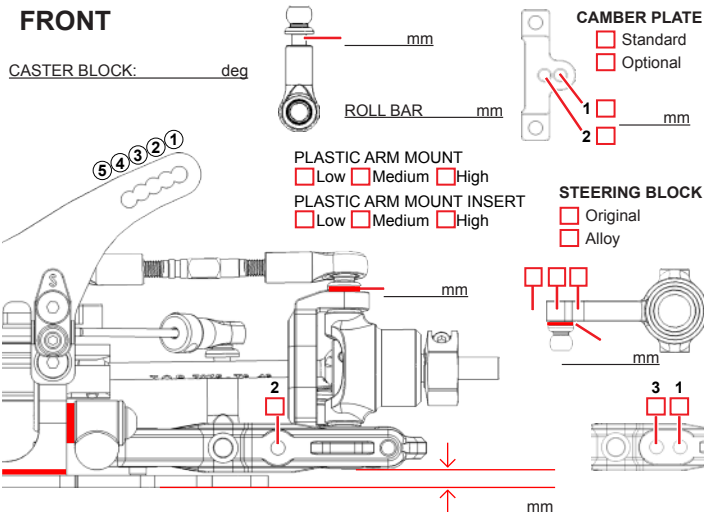


Roll Ctr. Shim : FF _____ mm / FR _____ mm

Toe-Out : (FF _____ mm - FR _____ mm) / 0.8 = _____ deg

Note: _____

REAR

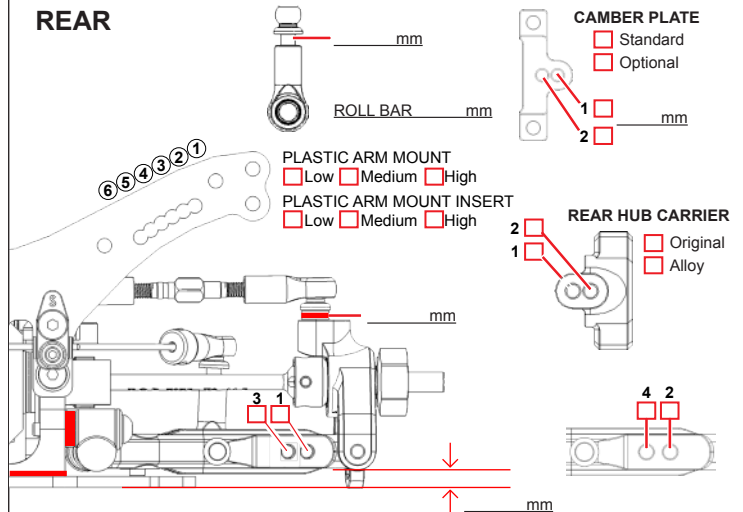

Roll Ctr. Shim : RR _____ mm / RF _____ mm

Toe-In : (RR _____ mm - RF _____ mm) / 0.8 = _____ deg

Note: _____