

The logo for Rebel F1X. It features the word "REBEL" in a stylized, italicized font with a metallic, distressed texture. Below "REBEL" is the text "F1" in a large, bold, italicized font. To the right of "F1" is a large, red, stylized "X" with a white outline.

Temperature:



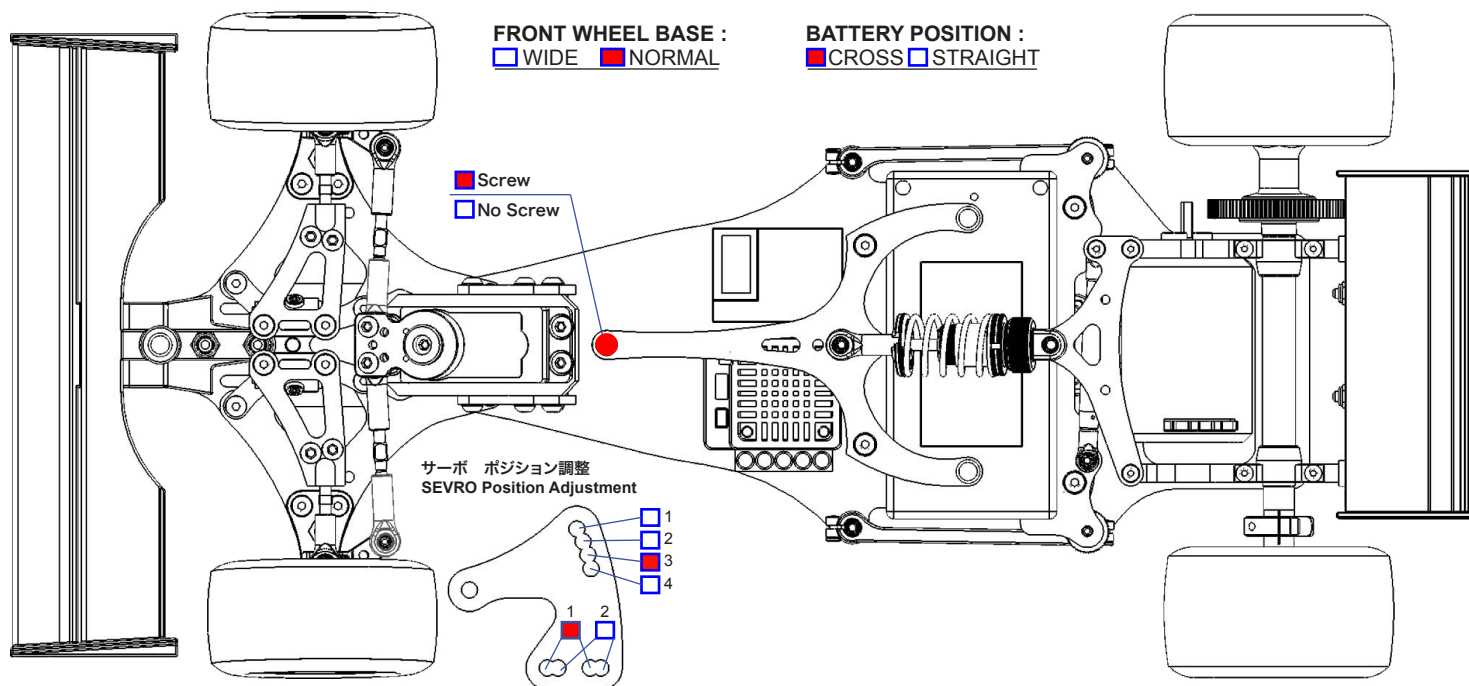


Diagram illustrating the front suspension assembly with various adjustment points and dimensions:

- Steering Block:** Dimensions include 1.5 mm (top), 2 mm (middle), and 1 mm (bottom).
- Front Spring:** Dimensioned as **std.** (standard).
- Ride Height:** Dimensioned as **4.5 mm**.
- Other Dimensions:** 1 mm (F), 1 mm (R), 2 mm, 3 mm, and several **-- mm** (unspecified) dimensions.

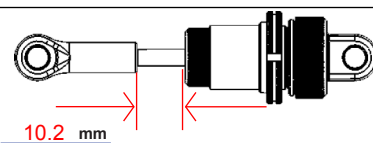


センター ショック / CENTER SHOCK			
PISTON	 Opt.	 1.0mm	 2hole
	 Std.	 1.2mm	 3hole
ショックスプリング / SHOCK SPRING		306	
ショックオイル / SHOCK OIL		500 cst.	
フォームインサート / FOAM INSERT		---	
リバウンド / REBOUND		50%	

[illegible]

	フロントタイヤ / FRONT TIRES	リアタイヤ / REAR TIRES
タイヤ / TIRE	Solaris 65EX	Solaris 24EX
直径 / DIAMETER	-- mm	-- mm
添加剤 / ADDITIVE	Solaris C	Solaris C
メモ / NOTES:		

$$\frac{(\text{タイヤ径 / TIRE DIAMETER } \underline{\hspace{2cm}} \text{ mm} \times 3.1416)}{(\text{スパーギア/SPUR GEAR } \quad \text{T} \quad \text{ピニオンギア/PINION GEAR } \quad \text{T})} = \underline{\hspace{2cm}}$$

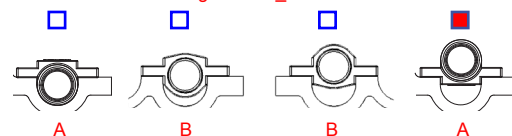

ボディー / BODY SHELLS	
フロントスポイラー / FRONT SPOILER	
リアウイング / REAR WING	
モーター / MOTOR	
バッテリー / BATTERY	
ESC セットアップ / ESC SETTINGS	