

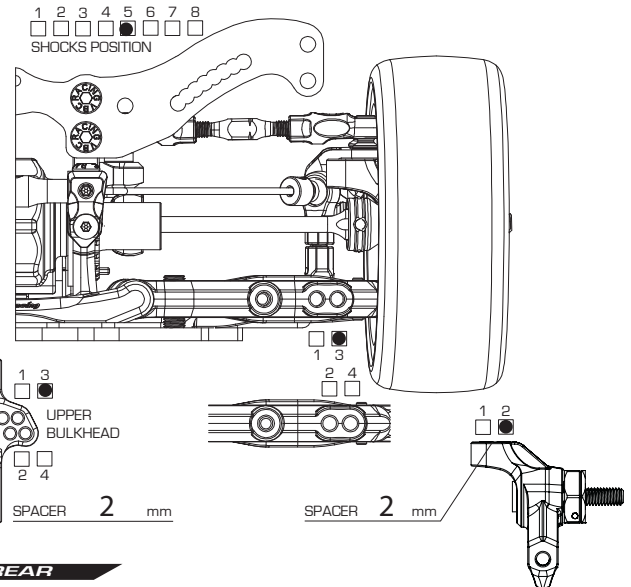
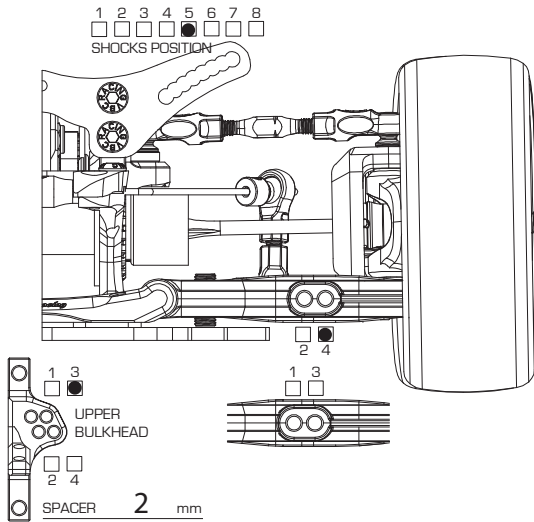
WILDFIRE DO6

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

SETUP SHEET

vbc racing

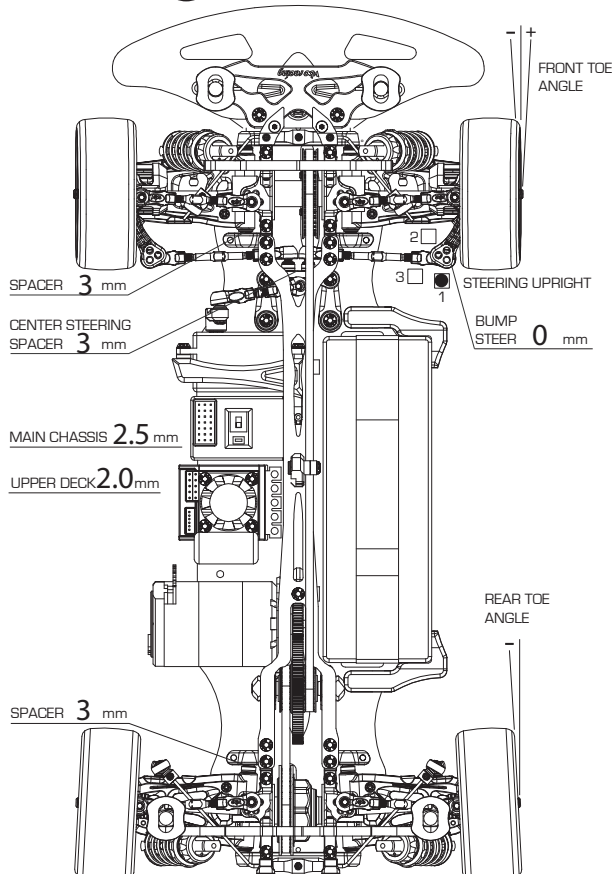
DRIVER	Default	DATE
TRACK NAME	RESULT	
TRACK SURFACE	(INDOOR/OUTDOOR)	BEST LAP
HUMIDITY	TRACK TEMP	
GRIP CONDITION	HI	MED LOW

**FRONT**

GROUND CLEARANCE	5 mm	DROOP	9.5mm (to pin center)
CAMBER ANGLE	-1.5 °	TOE ANGLE	+1 °
CASTER BLOCK	4	FRONT DRIVE DIFF (OIL)	) / DIRECT
STABILIZER	1.2 1.3 1.4	WHEEL SPACER	0 mm
SUSPENSION SHIM (FF)	1 mm	SUSPENSION SHIM (FR)	1 mm
SUSPENSION MOUNT (FF)	F00	SUSPENSION MOUNT (FR)	C0
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUM) mm		

REAR

GROUND CLEARANCE	5 mm	DROOP	9mm (to pin center)
CAMBER ANGLE	-1.5 °	TOE ANGLE	3 °
REAR DRIVE DIFF (OIL)	1000)	DRIVE CUP	ALUMINUM / STEEL
STABILIZER	1.2 1.3 1.4	WHEEL SPACER	0 mm
SUSPENSION SHIM (RF)	1 mm	SUSPENSION SHIM (RR)	1 mm
SUSPENSION MOUNT (RF)	C0	SUSPENSION MOUNT (RR)	E30
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUMINUM) mm		

**FRONT**

SHOCK LENGTH	59 mm
PISTON	3 4 hole(s) / OTHERS
OIL	350
SPRING	ORANGE
OIL SEALER CAP	S / MS M / H
REBOUND	20 %
NOTES	

**REAR**

SHOCK LENGTH	59 mm
PISTON	3 4 hole(s) / OTHERS
OIL	350
SPRING	RED
OIL SEALER CAP	S / MS M / H
REBOUND	20 %
NOTES	

MOTOR	4.5T	SPUR	64	PITCH/	116 T	PINION	PITCH/	T
TIRE	TIRE INSERT		WHEEL					
TIRE ADDITIVE	BODY		REAR WING					
ESC	BATTERY							
REMARKS								