

WILDFIRE DOB

SETUP SHEET

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

Arr0

vrc racing

TRACK *Riccione*RESULT *6th*

ASPHALT / CARPET

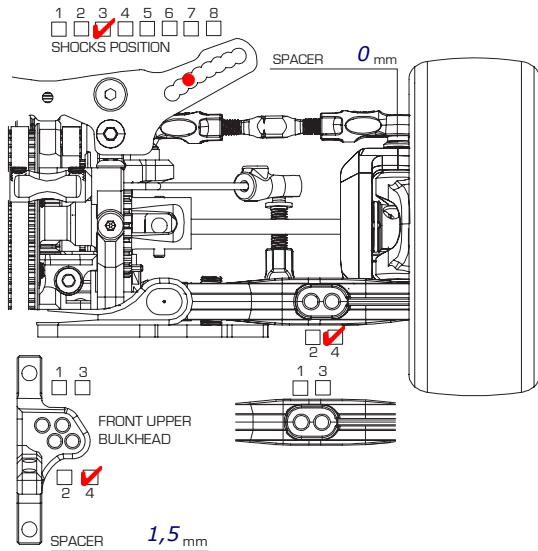
INDOOR / OUTDOOR

BEST LAP *19.2*

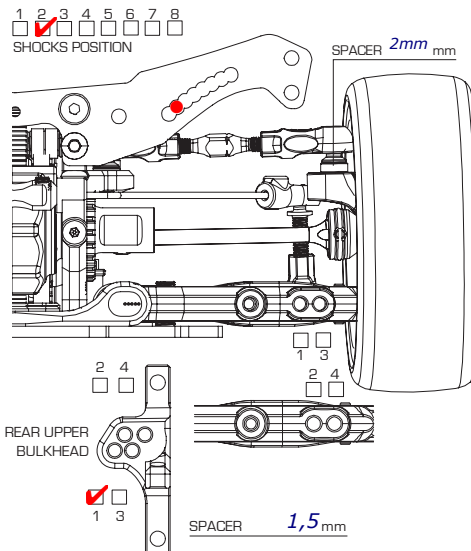
HUMIDITY

TRACK TEMP

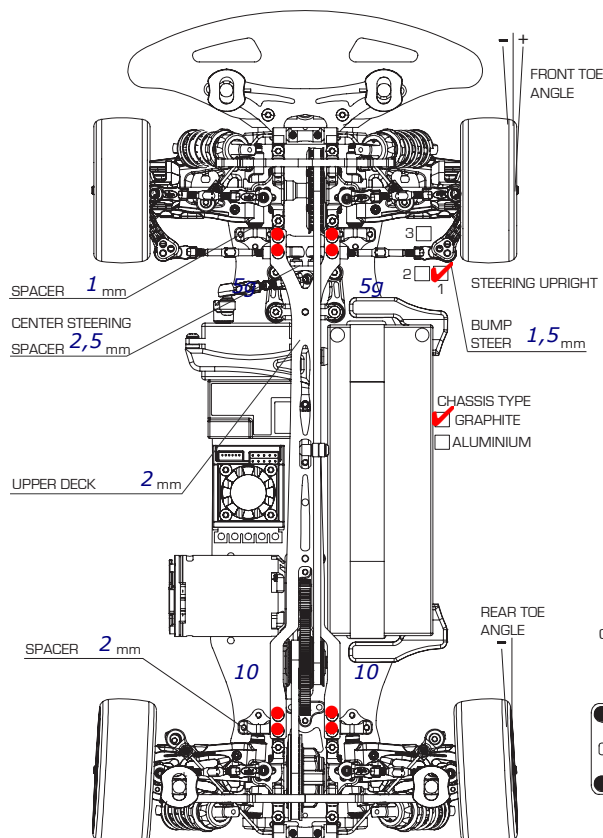
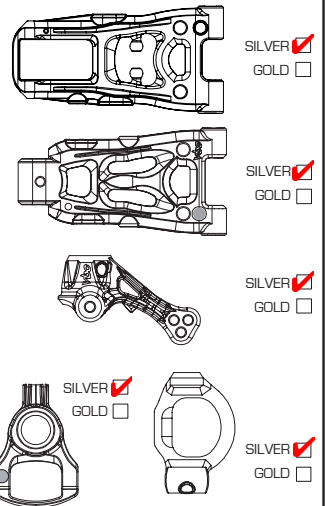
AIR TEMP

GRIP *LOW* *MEDIUM* HIGHSURFACE *BUMPY* MEDIUM SMOOTH**FRONT**

GROUND CLEARANCE	5.4 mm	DROOP	5.5 mm
CAMBER ANGLE	2 °	TOE ANGLE	1 °
CASTER ANGLE	4 °	FRONT DRIVE DIFF (OIL)	1/Direct ☒
STABILIZER	1.2 ☒ 1.4	WHEEL SPACER	mm
SUSPENSION SHIM (FF)	mm	SUSPENSION SHIM (FR)	mm
SUSPENSION MOUNT (FF)	+2	SUSPENSION MOUNT (FR)	1
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUM) 52 mm		

**REAR**

GROUND CLEARANCE	5.8 mm	DROOP	1.0 under hub mm
CAMBER ANGLE	1,5 °	TOE ANGLE	2,5 °
REAR DRIVE	DIFF (OIL 3k)	DRIVE CUP	ALUMINUM / STEEL
STABILIZER	1.2 ☒ 1.4	WHEEL SPACER	mm
SUSPENSION SHIM (FF)	mm	SUSPENSION SHIM (FR)	mm
SUSPENSION MOUNT (FF)	1	SUSPENSION MOUNT (FR)	+3
AXLE TYPE / SIZE	TWO-PIECE JOINT / SINGLE JOINT (STEEL/ALUM) 49 mm		

COMPOSITES**FRONT**

SHOCK LENGTH	9 mm
PISTON	3 4 hole(s) / OTHERS PSS
OIL	Hiro Seiko 40
SPRING	Xray 2.7
OIL SEALER CAP	S / ☒ MS / M / H
REBOUND	0 %
NOTES	Prototype (TBBS)

**REAR**

SHOCK LENGTH	9 mm
PISTON	3 4 hole(s) / OTHERS PSS
OIL	Hiro Seiko 40
SPRING	Xray 2.5-2.8
OIL SEALER CAP	S / ☒ MS / M / H
REBOUND	0 %
NOTES	Prototype (TBBS)

MOTOR	Handout	SPUR	102 T	PITCH	64	PINION	43 T
TIRE	Handout	TIRE INSERT		WHEEL			
TIRE ADDITIVE	Handout	BODY	Nazda 2	REAR WING	STD midcut 4mm		
ESC	Handout	BATTERY	Scorpion 6200 mah				
REMARKS	Front Solid Mount, 10g center						

Chassis Flex Setting (Fill in the Circle)

