WILDFIRE 0.03

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

ArnO / PetitRC

SETUP SHEET

DRIVER Frederik Brøløs Mikkelsen | DATE | EVENT

TRACK Tinglev (DRCMU) | GRIP HI / MED / LOW | TRACK TEMP | HUMIDITY

COMPOSITION ASPHALT (INDOOR/OUTDOOR)/CARPET | SURFACE BUMPY/SMOOTH | LAYOUT OPEN/MIXED/TIGHT

RESULT | BEST LAP

FRONT

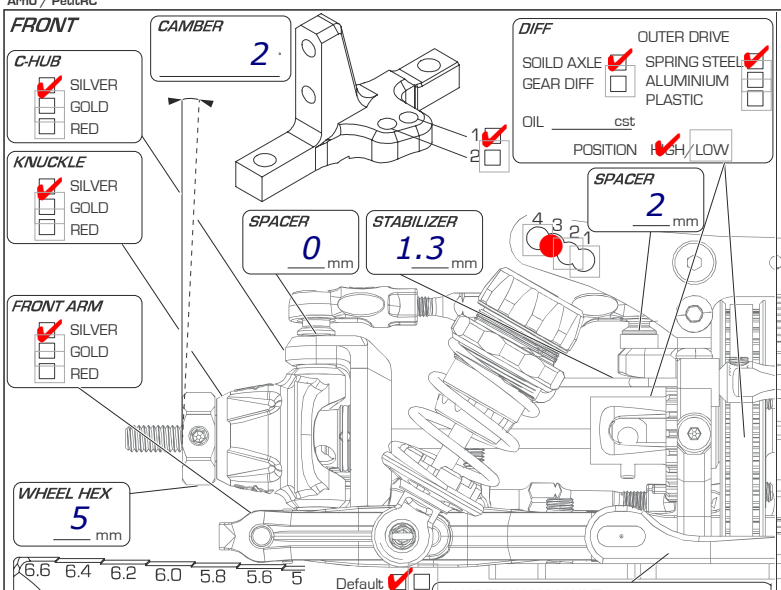

C-HUB: SILVER / GOLD / RED

KNUCKLE: SILVER / GOLD / RED

FRONT ARM: SILVER / GOLD / RED

CAMBER: 2

DIFF: OUTER DRIVE — SOILD AXLE / GEAR DIFF; SPRING STEEL / ALUMINIUM / PLASTIC; OIL ___ cst; POSITION HIGH/LOW

SPACER: 0 mm

STABILIZER: 1.3 mm

SPACER: 2 mm

WHEEL HEX: 5 mm

DOWNSTOP: 6.6 6.4 6.2 6.0 5.8 5.6 5 — Default

UNDER ARM: 5.6 mm

SUSPENSION MOUNT

SUSPENSION SHIM		INSERT
FF	0 mm	FF +4 NARROW/WIDE
FR	0 mm	FR +3 NARROW/WIDE

FF MOUNT: BRASS

FR MOUNT TYPE: BRASS / SOLID / SPLIT

REAR

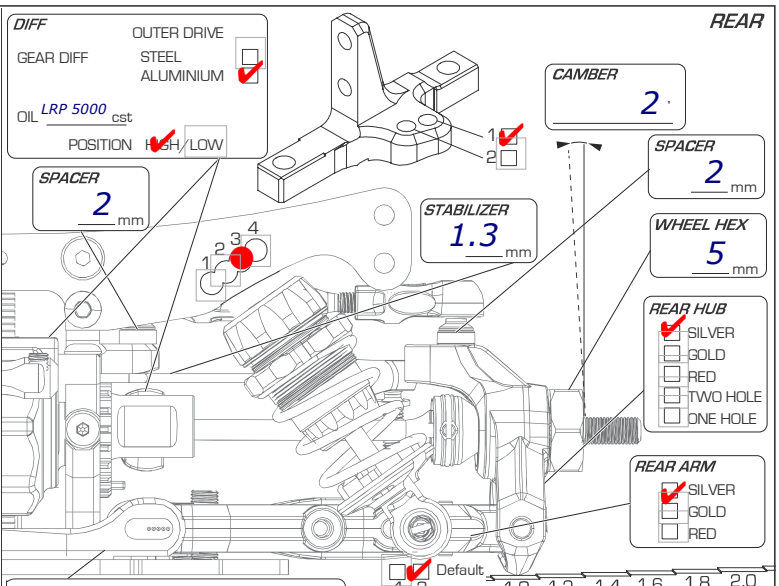

DIFF: OUTER DRIVE — GEAR DIFF; STEEL / ALUMINIUM; OIL LRP 5000 cst; POSITION HIGH/LOW

SPACER: 2 mm

STABILIZER: 1.3 mm

CAMBER: 2

SPACER: 2 mm

WHEEL HEX: 5 mm

REAR HUB: SILVER / GOLD / RED / TWO HOLE / ONE HOLE

REAR ARM: SILVER / GOLD / RED

DOWNSTOP: 1.0 1.2 1.4 1.6 1.8 2.0 — Default

UNDER HUB/ARM: 4.4 mm

SUSPENSION MOUNT

SUSPENSION SHIM		INSERT
RF	0 mm	RF +2 NARROW/WIDE
RR	0 mm	RR +2 NARROW/WIDE

RR MOUNT: BRASS

RF MOUNT TYPE: BRASS / SOLID / SPLIT

CENTER

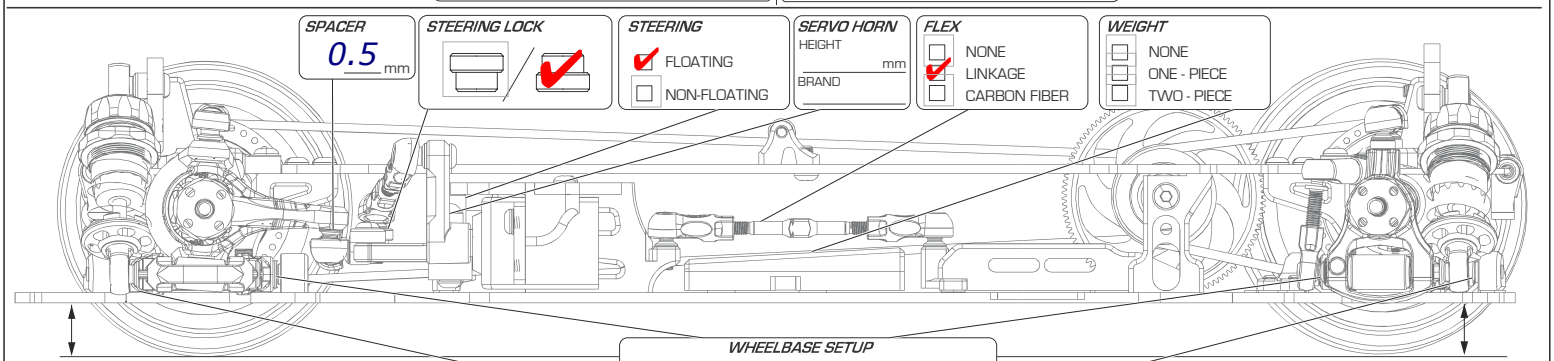

SPACER: 0.5 mm

STEERING LOCK

STEERING: FLOATING / NON-FLOATING

SERVO HORN: HEIGHT ___ mm; BRAND

FLEX: NONE / LINKAGE / CARBON FIBER

WEIGHT: NONE / ONE - PIECE / TWO - PIECE

GROUND CLEARANCE: 5 mm

WHEELBASE SETUP: FF 3 mm; FR 1 mm; RF 2 mm; RR 2 mm

GROUND CLEARANCE: 5.2 mm

FRONT SHOCK

PISTON 3 / 4 hole(s)

OIL Yokomo 400

SPRING SMJ Pink

SEALER CAP: CLEAR / BLACK / BLUE / RED

REBOUND 0 %

REAR SHOCK

PISTON 3 / 4 hole(s)

OIL Yokomo 400

SPRING SMJ Pink

SEALER CAP: CLEAR / BLACK / BLUE / RED

REBOUND 0 %

ARTS SETUP

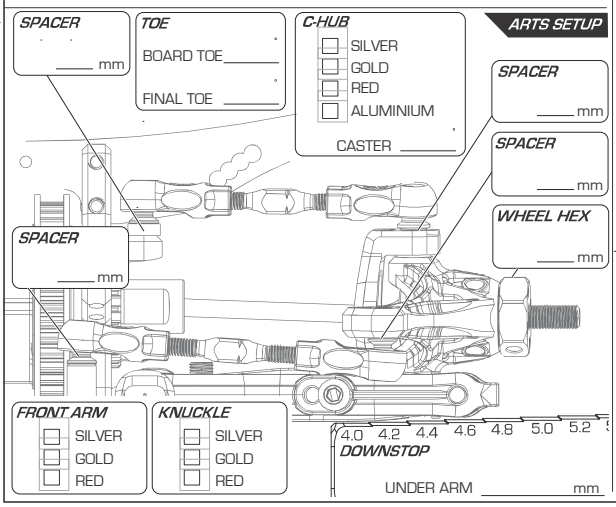

SPACER: ___ mm

TOE: BOARD TOE ___; FINAL TOE ___

C-HUB: SILVER / GOLD / RED / ALUMINIUM; CASTER ___

SPACER: ___ mm

SPACER: ___ mm

WHEEL HEX: ___ mm

SPACER: ___ mm

FRONT ARM: SILVER / GOLD / RED

KNUCKLE: SILVER / GOLD / RED

DOWNSTOP: 4.0 4.2 4.4 4.6 4.8 5.0 5.2

UNDER ARM: ___ mm

CHASSIS

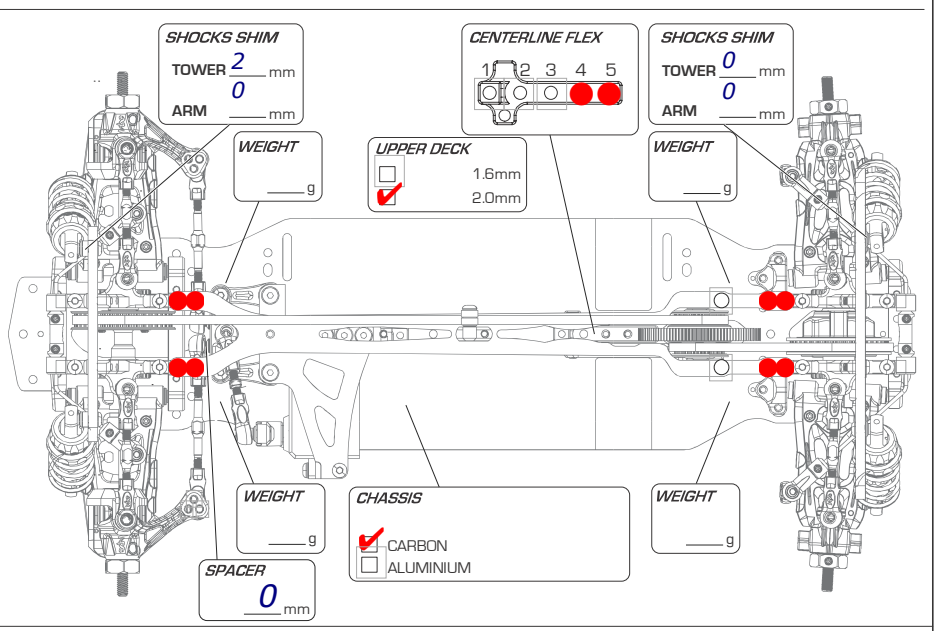

SHOCKS SHIM: TOWER 2 mm; ARM 0 mm

WEIGHT: ___ g

CENTERLINE FLEX: 1 2 3 4 5

UPPER DECK: 1.6mm / 2.0mm

SHOCKS SHIM: TOWER 0 mm; ARM 0 mm

WEIGHT: ___ g

WEIGHT: ___ g

CHASSIS: CARBON / ALUMINIUM

SPACER: 0 mm

WEIGHT: ___ g

MOTOR		SPUR	T	PINION	T	PITCH
TIRE	Sorex 28	INSERT		WHEEL		
TIRE ADDITIVE		BODY	Protoform Speed 6	REAR WING	MR33	
ESC		BATTERY				