WILDFIRE 003

1/10 4WD ELECTRIC COMPETITION TOURING CAR KIT

ArnO / PetitRC

SETUP SHEET

DRIVER Gary Lanzer | DATE Feb 3-5,17 | EVENT WCIC

TRACK Moose Jaw | GRIP HI / MED ✓ / LOW | TRACK TEMP | HUMIDITY

COMPOSITION ASPHALT (INDOOR/OUTDOOR) / CARPET ✓ | SURFACE BUMPY/SMOOTH ✓ | LAYOUT OPEN/MIXED ✓/TIGHT

RESULT Triple A/5th overall | BEST LAP

FRONT

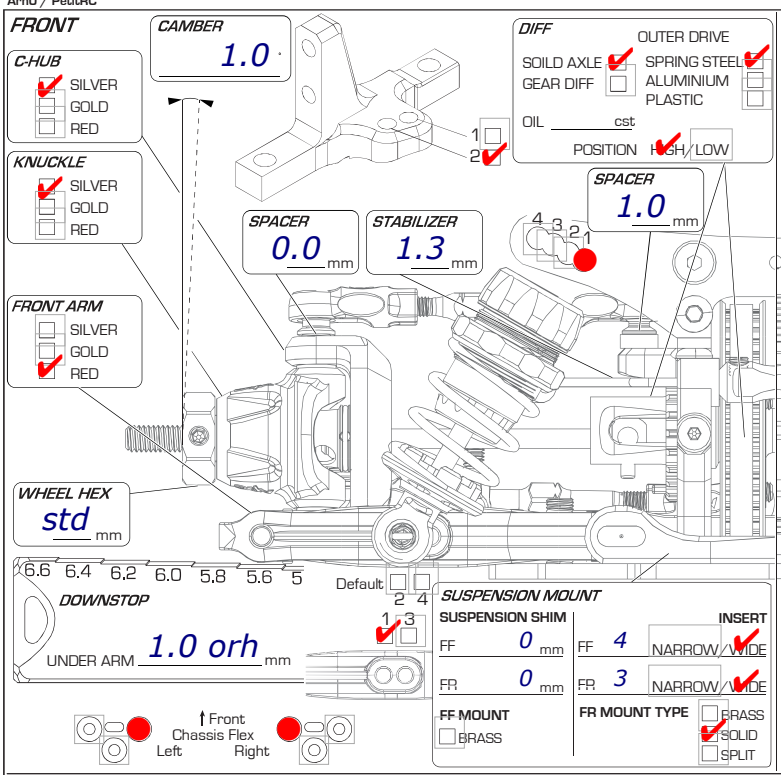

CAMBER 1.0

C-HUB: ✓ SILVER / GOLD / RED

KNUCKLE: ✓ SILVER / GOLD / RED

FRONT ARM: SILVER / GOLD / ✓ RED

DIFF: SOILD AXLE ✓ / GEAR DIFF — OUTER DRIVE: SPRING STEEL ✓ / ALUMINIUM / PLASTIC — OIL cst — POSITION HIGH ✓/LOW — 1 / 2 ✓

SPACER 0.0 mm

STABILIZER 1.3 mm

SPACER 1.0 mm

WHEEL HEX std mm

DOWNSTOP: 6.6 6.4 6.2 6.0 5.8 5.6 5 — Default ✓ — UNDER ARM 1.0 orh mm

SUSPENSION MOUNT

SUSPENSION SHIM		INSERT
FF	0 mm	FF 4 NARROW/✓WIDE
FR	0 mm	FR 3 NARROW/✓WIDE
FF MOUNT: BRASS		FR MOUNT TYPE: BRASS / ✓ SOLID / SPLIT

↑ Front — Chassis Flex — Left / Right

REAR

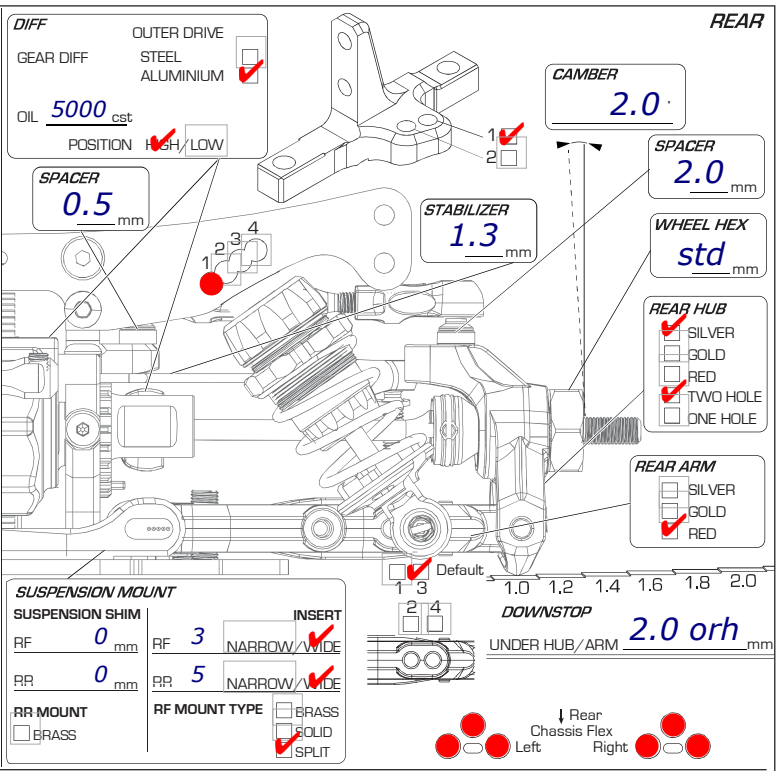

DIFF: GEAR DIFF — OUTER DRIVE: STEEL / ✓ ALUMINIUM — OIL 5000 cst — POSITION HIGH ✓/LOW — 1 ✓ / 2

SPACER 0.5 mm

STABILIZER 1.3 mm

CAMBER 2.0

SPACER 2.0 mm

WHEEL HEX std mm

REAR HUB: ✓ SILVER / GOLD / RED / ✓ TWO HOLE / ONE HOLE

REAR ARM: SILVER / GOLD / ✓ RED

DOWNSTOP: 1.0 1.2 1.4 1.6 1.8 2.0 — ✓ Default — UNDER HUB/ARM 2.0 orh mm

SUSPENSION MOUNT

SUSPENSION SHIM		INSERT
RF	0 mm	RF 3 NARROW/✓WIDE
RR	0 mm	RR 5 NARROW/✓WIDE
RR MOUNT: BRASS		RF MOUNT TYPE: BRASS / ✓ SOLID / SPLIT

↓ Rear — Chassis Flex — Left / Right

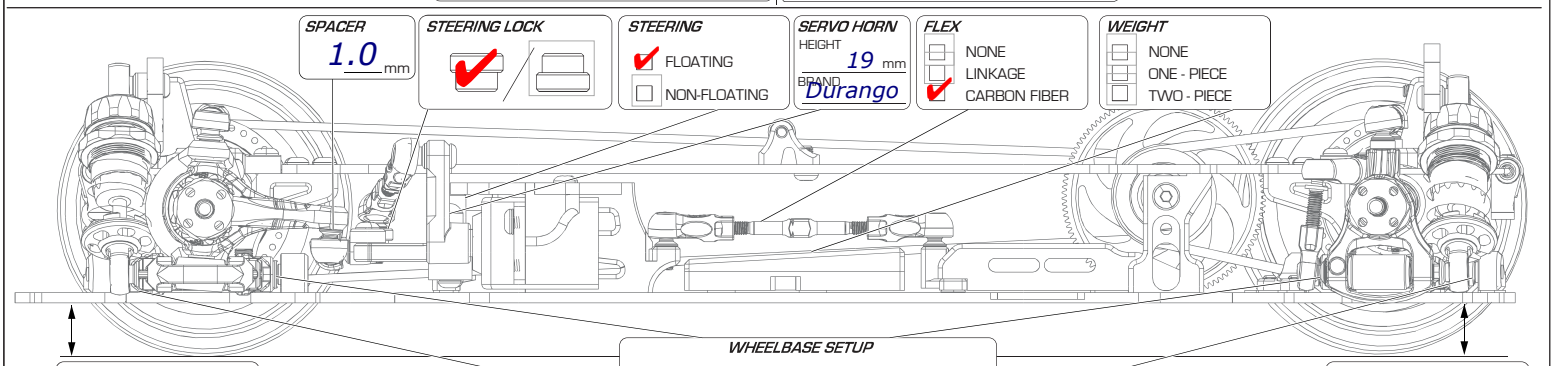

SPACER 1.0 mm

STEERING LOCK ✓

STEERING: ✓ FLOATING / NON-FLOATING

SERVO HORN: HEIGHT 19 mm — BRAND Durango

FLEX: NONE / LINKAGE / ✓ CARBON FIBER

WEIGHT: NONE / ONE - PIECE / TWO - PIECE

GROUND CLEARANCE 5.2 mm

WHEELBASE SETUP: FF 3 mm — FR 1 mm — RF 2 mm — RR 2 mm

GROUND CLEARANCE 5.4 mm

FRONT SHOCK

PISTON 3 / ✓ 4 hole(s)

OIL 500

SPRING 2.6 Xray

SEALER CAP: CLEAR / ✓ BLACK / BLUE / RED

REBOUND 0 %

REAR SHOCK

PISTON 3 / ✓ 4 hole(s)

OIL 500

SPRING 2.4 RSD

SEALER CAP: CLEAR / ✓ BLACK / BLUE / RED

REBOUND 0 %

ARTS SETUP

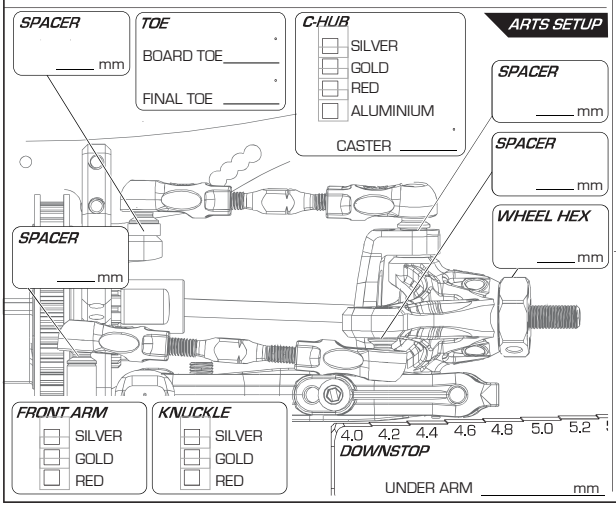

SPACER ___ mm

TOE: BOARD TOE ___ ° — FINAL TOE ___ °

C-HUB: SILVER / GOLD / RED / ALUMINIUM — CASTER ___ °

SPACER ___ mm

SPACER ___ mm

WHEEL HEX ___ mm

SPACER ___ mm

FRONT ARM: SILVER / GOLD / RED

KNUCKLE: SILVER / GOLD / RED

DOWNSTOP: 4.0 4.2 4.4 4.6 4.8 5.0 5.2 — UNDER ARM ___ mm

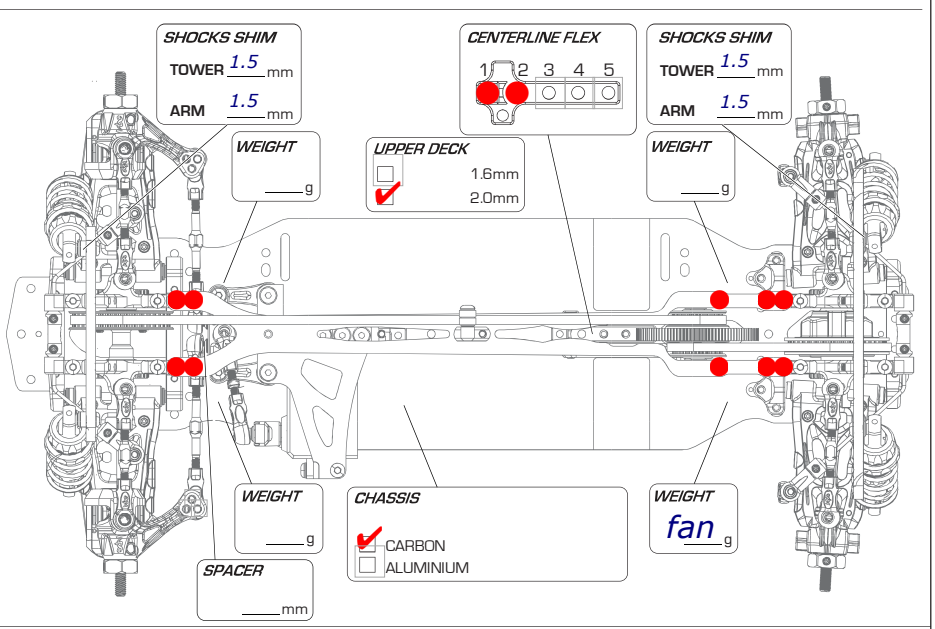

SHOCKS SHIM: TOWER 1.5 mm — ARM 1.5 mm

WEIGHT ___ g

UPPER DECK: 1.6mm / ✓ 2.0mm

CENTERLINE FLEX: 1 2 3 4 5

SHOCKS SHIM: TOWER 1.5 mm — ARM 1.5 mm

WEIGHT ___ g

WEIGHT ___ g

SPACER ___ mm

CHASSIS: ✓ CARBON / ALUMINIUM

WEIGHT fan g

MOTOR	R1 V15 17.5	SPUR	96 T	PINION	43 T	PITCH	64
TIRE	Sweep QTS 28	INSERT	spec	WHEEL	spec		
TIRE ADDITIVE	SXT	BODY	PF Speed6	REAR WING	HD		
ESC	R1 D2	BATTERY	Turnigy 5.0				

nose weight