

FRONT

C-HUB

- ☐ SILVER
- ☐ GOLD
- ☐ RED

KNUCKLE

- ☐ SILVER
- ☐ GOLD
- ☐ RED

FRONT ARM

- ☐ SILVER
- ☐ GOLD
- ☐ RED

WHEEL HEX

____ mm

CAMBER

1 ☐ 2 ☐

DIFF

SOILD AXLE ☐ SPRING STEEL ☐

GEAR DIFF ☐ ALUMINIUM ☐

PLASTIC ☐

OIL _____ cst

POSITION HIGH/LOW

SPACER

____ mm

4 3 2 1

STABILIZER

____ mm

SUSPENSION MOUNT

SUSPENSION SHIM

FF _____ mm

FR _____ mm

FF MOUNT ☐ BRASS

FR MOUNT TYPE ☐ BRASS ☐ SOLID ☐ SPLIT

INSERT

NARROW/WIDE

NARROW/WIDE

REAR

CAMBER

1 ☐ 2 ☐

DIFF

GEAR DIFF ☐

OUTER DRIVE ☐ STEEL ☐

ALUMINIUM ☐

OIL _____ cst

POSITION HIGH/LOW

SPACER

____ mm

4 3 2 1

STABILIZER

____ mm

SUSPENSION MOUNT

SUSPENSION SHIM

RF _____ mm

RR _____ mm

RF MOUNT ☐ BRASS

RR MOUNT TYPE ☐ BRASS ☐ SOLID ☐ SPLIT

INSERT

NARROW/WIDE

NARROW/WIDE

REAR HUB

- ☐ SILVER
- ☐ GOLD
- ☐ RED
- ☐ TWO HOLE
- ☐ ONE HOLE

REAR ARM

- ☐ SILVER
- ☐ GOLD
- ☐ RED

WHEEL HEX

____ mm

CAMBER

1 ☐ 2 ☐

DOWNSTOP

6.6 6.4 6.2 6.0 5.8 5.6 5

Default: ☐ 2 ☐ 4

UNDER ARM _____ mm

1 ☐ 3 ☐

↑ Front Chassis Flex Left Right


DOWNSTOP

1.0 1.2 1.4 1.6 1.8 2.0



Default: ☐ 1 ☐ 3 ☐ 2 ☐ 4

UNDER HUB/ARM _____ mm

↓ Rear Chassis Flex Left Right

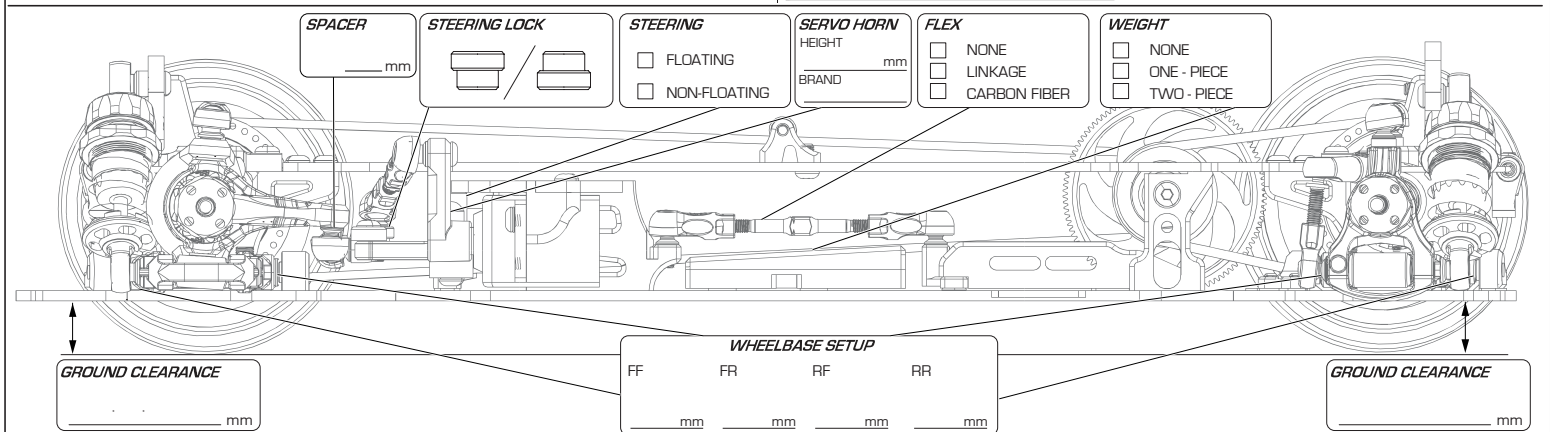

<i>FRONT SHOCK</i>		<i>REAR SHOCK</i>	
PISTON 3 4 hole(s)		PISTON 3 4 hole(s)	
OIL		OIL	
SPRING		SPRING	
SEALER CAP CLEAR / BLACK / BLUE / RED		SEALER CAP CLEAR / BLACK / BLUE / RED	
REBOUND %		REBOUND %	

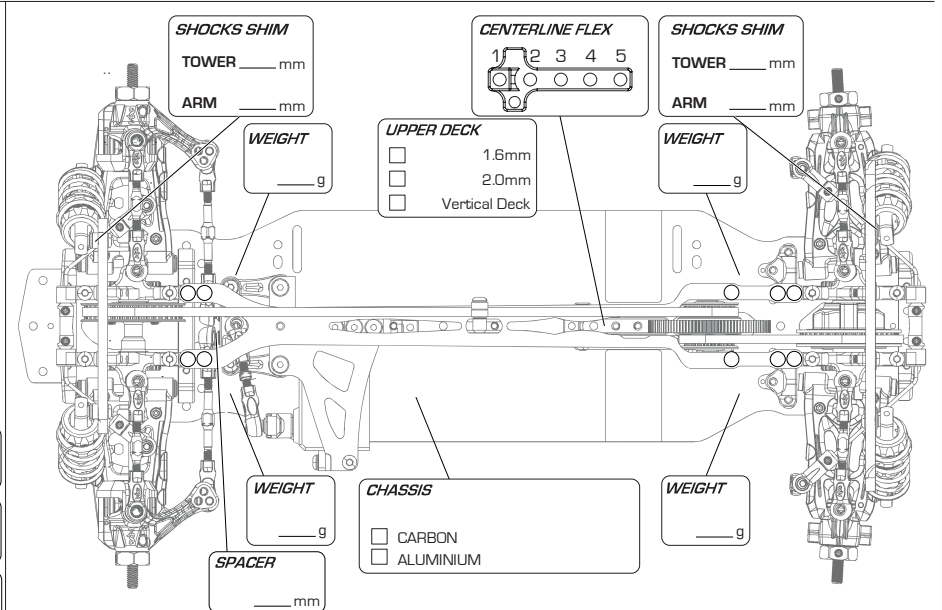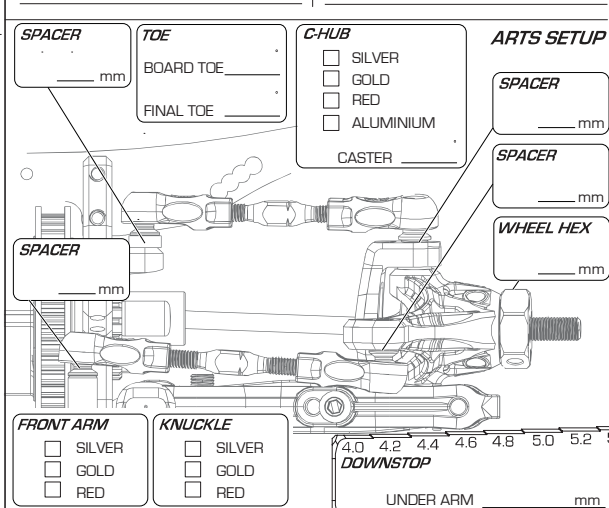

MOTOR	SPUR	T	PINION	T	PITCH
TIRE	INSERT		WHEEL		
TIRE ADDITIVE	BODY		REAR WING		
ESC	BATTERY				