

GT^X SETUP SHEET

NAME _____
 DATE _____
 TRACK _____

TRACK CONDITION

SURFACE ☐ SMOOTH ☒ MEDIUM ☐ BUMPY
SIZE ☐ TIGHT ☒ MEDIUM ☐ FAST
TRACTION ☐ LOW ☒ MEDIUM ☐ HIGH

TRANSMISSION

PINION 1st: 19 2nd: 24
SPUR GEAR 1st: 61 2nd: 57

CLUTCH SETTINGS

SHOE ☒ STANDARD ☐ OPTIONAL
SPRING 0.50
BELL CLEARANCE /mm 0.50
BELL AXIAL PLAY /mm 0.10

SHOCKS SETTINGS

	FRONT	REAR
SPRINGS		
OIL	600	600
PISTON	ORIGINAL	ORIGINAL
LENGHT /mm		
PRELOAD /mm		
REBOUND %	10%	10%

ANTI-ROLL BAR

FRONT	2.3
REAR	3.2

ARM BUSHES ORIENTATION



☒ +0.5mm
☐ -0.5mm
 ☒ +1.0mm
☐ -1.0mm
 ☐ +1.5mm
☐ -1.5mm

BATTERY MOUNT

☒ STANDARD ☐ BRASS

ENGINE MOUNT

☒ STANDARD ☐ BRASS

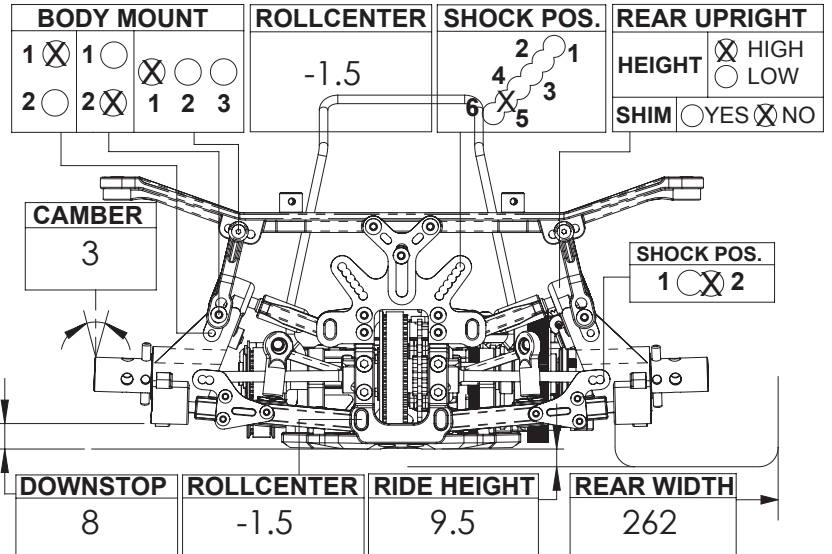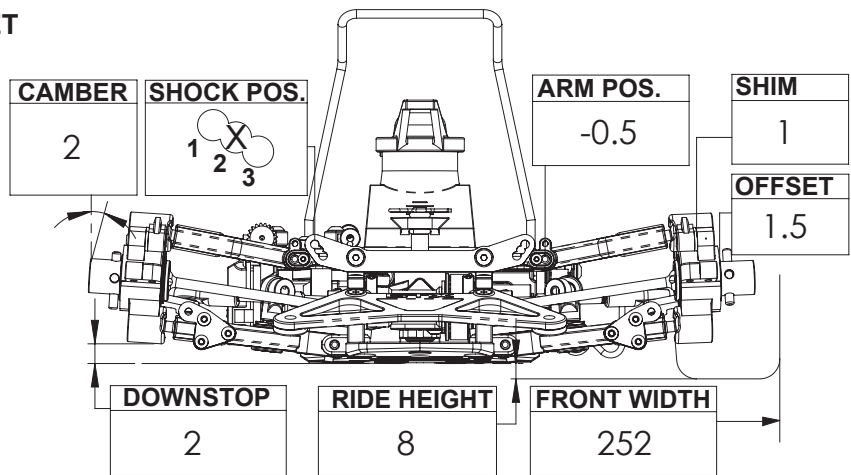

DISC
☒ YES
☐ NO

TOE°
 2.5

FLOATING PLATE
☒ YES
☐ NO

SERVO SAVER POS.
☐ FRONT (1)
☒ REAR (2)

DISC
☒ YES
☐ NO

TOE°
 1.5

