

STX017

Track Condition

Composition: ☐ Asphalt ☐ Carpet
 Surface: ☐ Smooth ☐ Medium ☐ Bumpy
 Traction: ☐ Low ☐ Medium ☐ High
 Size: ☐ Tight ☐ Medium ☐ Open

Track Temp.: _____ Air Temp.: _____

Electronics

Motor: _____ Timing: _____
 ESC: _____ Battery: _____
 Spur: _____ Pinion: _____ Final Ratio: _____

Aerodynamics

Body: _____ Wing: _____

Front Shocks Rear

- Spring -

- Oil -

- Piston -

- Rebound (%) -

Anti-Roll Bar

Tires

- Inserts -

- Rims -

- Additive -

- Additive Time -

FRONT LEFT FRONT RIGHT Surface Rear Left Rear Right

Transmission

☐ Gear ☐ Ball - Differential - ☐ Gear ☐ Ball
 - Oil -
 - Oil Weight (Grs) -
 - Setting -

☐ Spool

Roll Center

- Setting -

Front-Front

(2.5 2 0° 2 5'2)

(3 1.5 0.5° 5'1 8)

☐ Alu ☐ Brass

Rear-Rear

(1 5'8 (3.5 1

(5'1 8 (3 1.5

(2 5'2 (2.5 2

(2.5 2 (2 5'2

(3 1.5 (5'1 8

(3.5 1 (1 5'8


☐ Alu ☐ Brass

Front-Rear & Rear-Front

(2.5 2 Standard Position (2 5'2

FR: ☐ Alu ☐ Brass

RF: ☐ Alu ☐ Brass

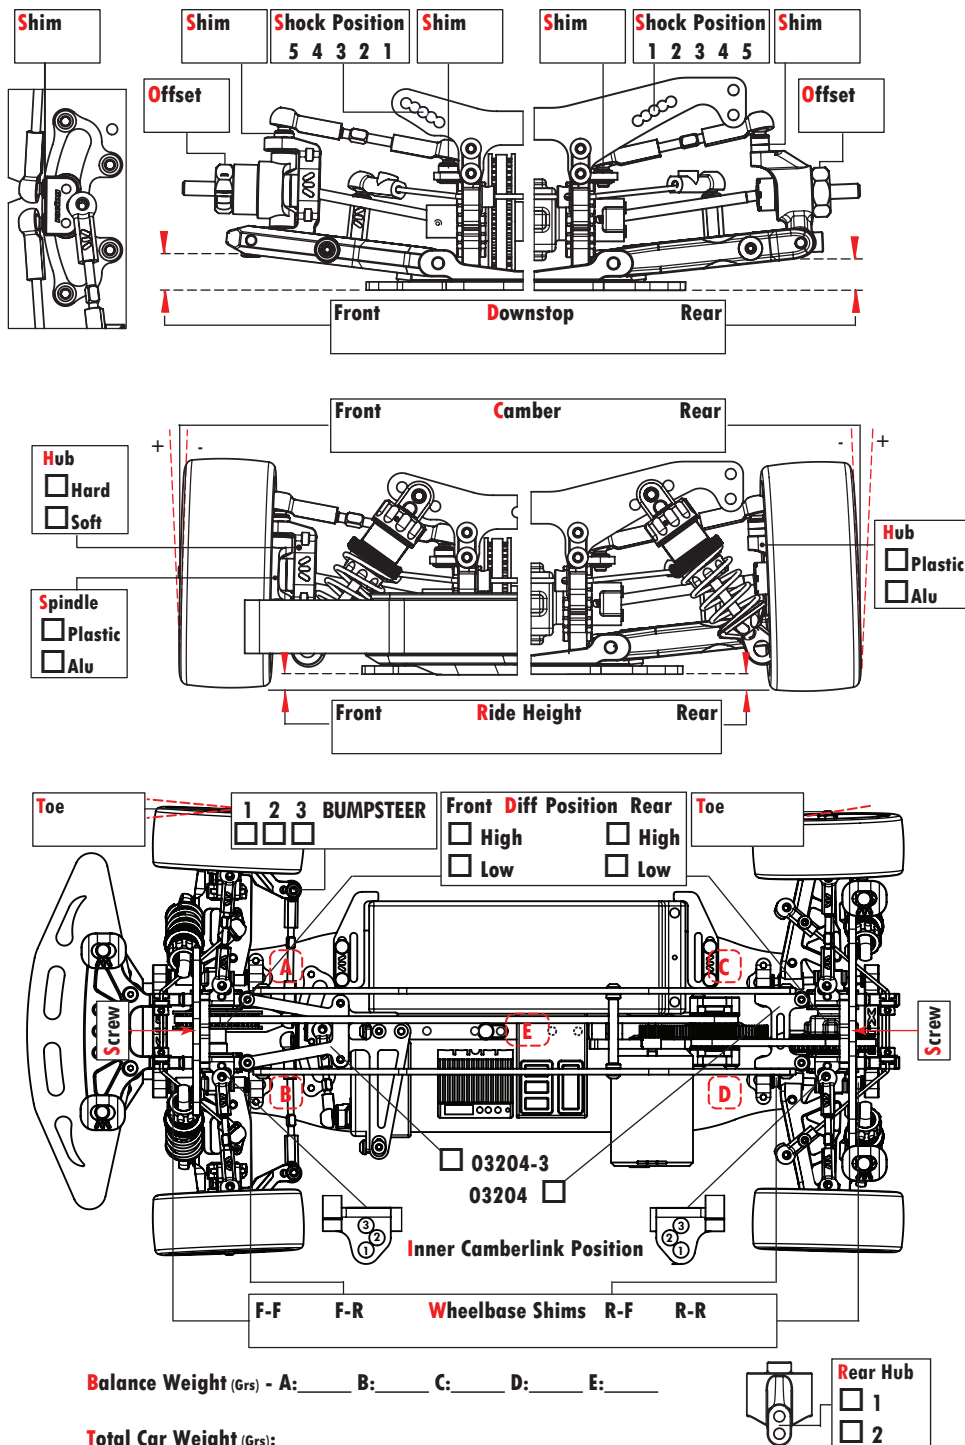

Notes

Total Car Weight (Grs): _____