



Driver _____ Track Surface Indoor / Outdoor / Asphalt / Carpet Track Temperature _____
 Date _____ Track Traction _____ Result _____ Air Temperature _____
 Track _____ Country _____ Best Lap _____ Humidity _____ Remark _____

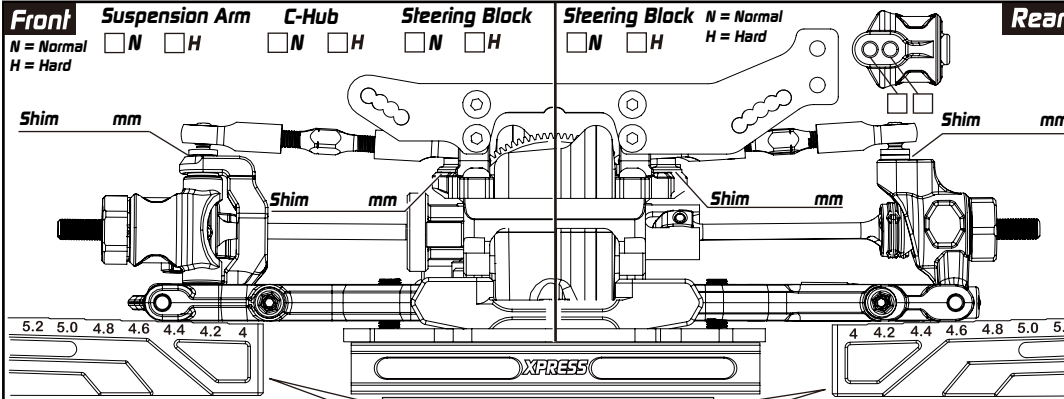

Optional On-Power Control System

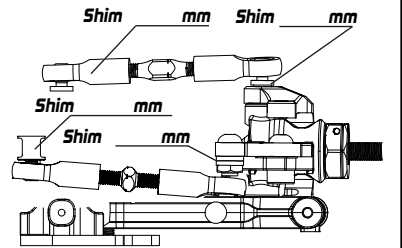


Camber Link (Optional) mm DownStop mm

Item No: _____ Camber _____
 XP: _____ mm Ride Height mm
 mm Hex Offset mm
 mm Sway Bar mm
 mm Camber Link Distance mm

Shim mm Shim mm

Hex Offset _____ mm
 Camber _____
 Ride Height _____ mm
 DownStop _____ mm
 Sway Bar _____ mm

Steering Block M H
 Suspension Arm M H

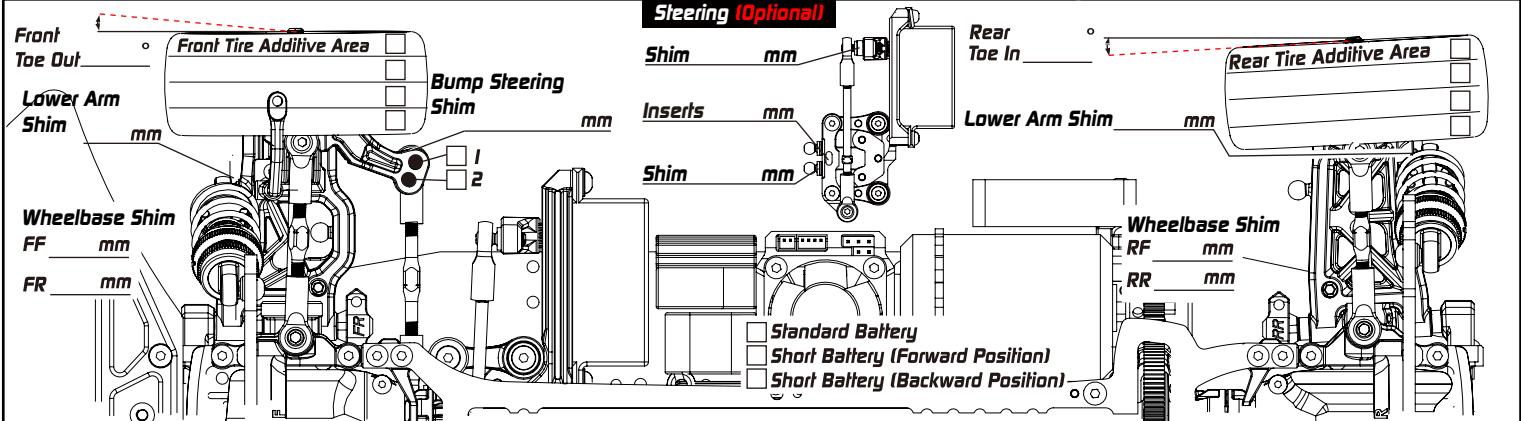


Suspension Mount Setup (Optional)

FF FR RF RR

1 Aluminium Spilt 1 Aluminium Spilt
 0.5 Brass Solid 0.5 Brass Solid

Mount Spacer mm Mount Spacer mm Mount Spacer mm Mount Spacer mm

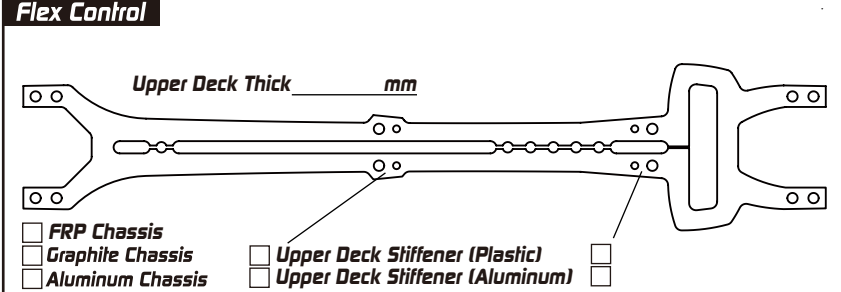

Damper Setup

Foam Insert Hole In Cap Front Rear

Spring _____
 Oil _____
 Rebound _____
 Piston _____
 Length _____

Transmission Setup

Front _____ Rear _____
 Diff. _____
 / 9 Oil _____ / 9

Bevel Gear _____
 Spur P/ T Pinon P/ T

Final Drive Ratio _____ : 1

Formula
 Final Drive Ratio = $\left(\frac{\text{Spur Pinon}}{\text{Internal Ratio}} \times 2.353\right) : 1$

Others

Servo _____ Tires _____
 Esc _____
 Motor _____
 Additive _____
 Body _____
 Rear Wing _____

Remark