XPRESS EXECUTE XQ10R

SET-UP SHEET

Driver _____ Track Surface Indoor / Outdoor / Asphalt / Carpet _____ Track Temperture _____

Date _____ Track Traction _____ Result _____ Air Temperture _____

Track _____ Country _____ Best Lap _____ Humidity _____ Remark _____

Front

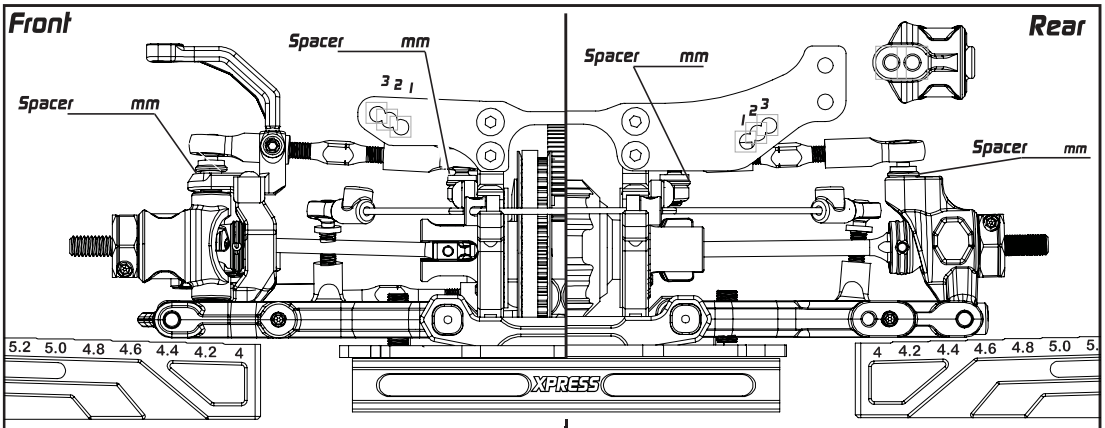

Camber Link

C-Hub ☐ M ☐ H

Steering Block ☐ M ☐ H

Suspension Arm ☐ M ☐ H

Hex Offset _____ mm

Camber _____ °

Ride Height _____ mm

DownStop _____ mm

Sway Bar _____ mm

Rear

_____ mm

_____ °

_____ mm

_____ mm

_____ mm

Rear Hub ☐ M ☐ H

Suspension Arm ☐ M ☐ H

Camber Link

Optional

On-Power Control System

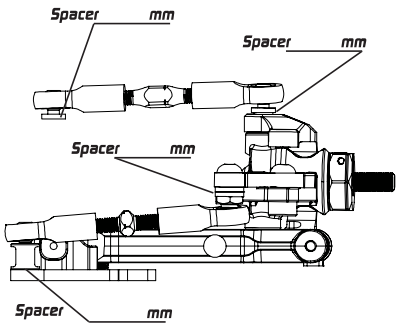

Hex Offset _____ mm

Camber _____ °

Ride Height _____ mm

DownStop _____ mm

Sway Bar _____ mm

Caster _____ °

Steering Block ☐ M ☐ H

Suspension Arm ☐ M ☐ H

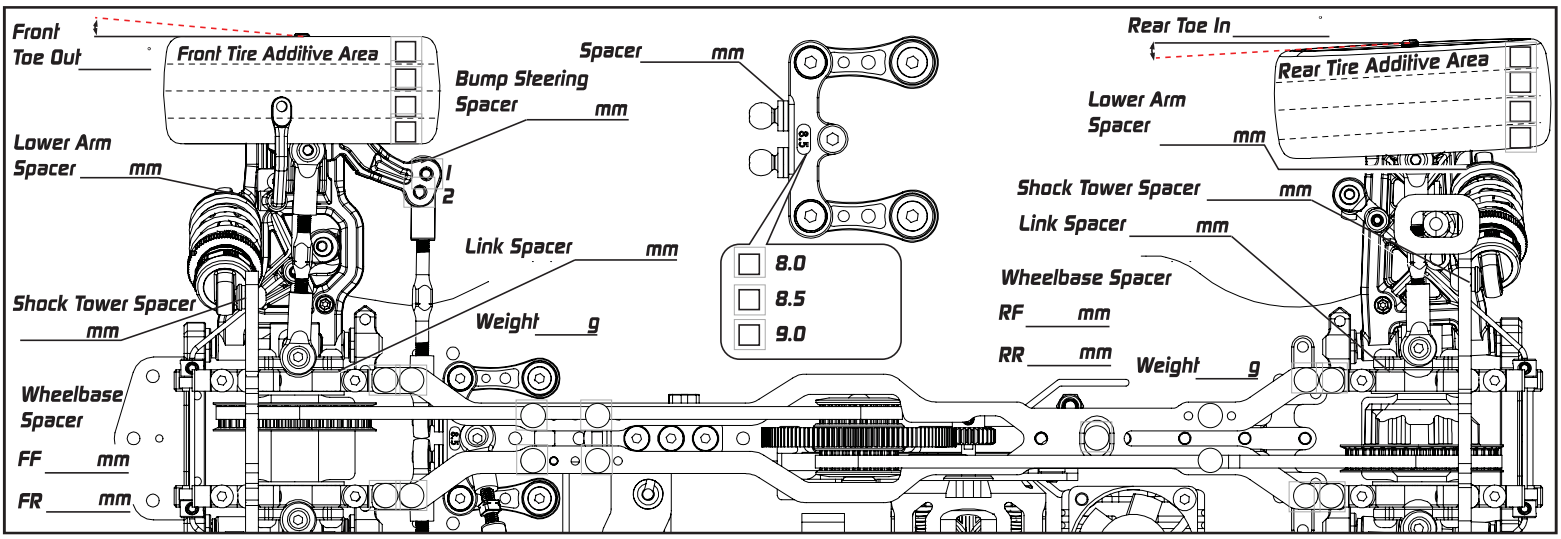

Suspension Mount Setup

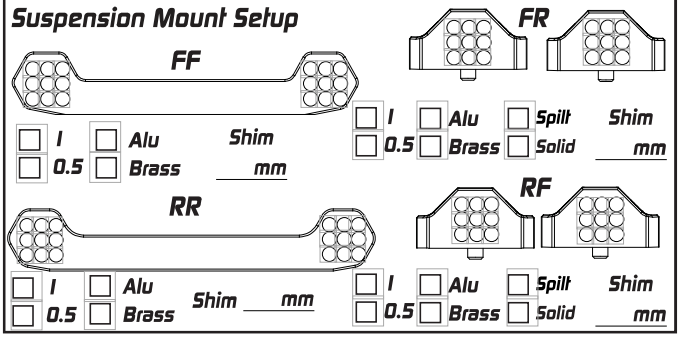

FF: ☐ 1 ☐ 0.5 ☐ Alu ☐ Brass Shim _____ mm

FR: ☐ 1 ☐ 0.5 ☐ Alu ☐ Brass ☐ Spilt ☐ Solid Shim _____ mm

RR: ☐ 1 ☐ 0.5 ☐ Alu ☐ Brass Shim _____ mm

RF: ☐ 1 ☐ 0.5 ☐ Alu ☐ Brass ☐ Spilt ☐ Solid Shim _____ mm

Flex Control

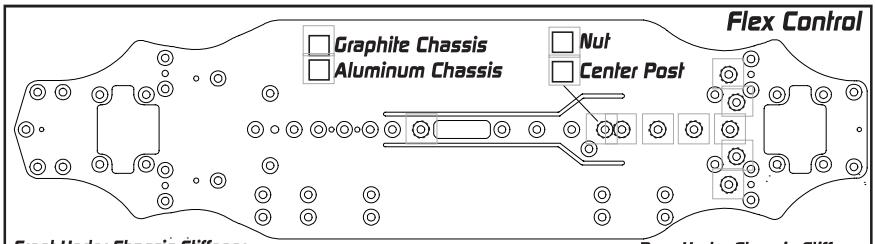

☐ Graphite Chassis ☐ Aluminum Chassis

☐ Nut ☐ Center Post

Front Under Chassis Stiffener
☐ None ☐ Graphite ☐ Brass

☐ Standard Battery
☐ Short Battery (Forward Position)
☐ Short Battery (Backward Position)

Rear Under Chassis Stiffener
☐ None ☐ Graphite ☐ Brass

Damper Setup

	Front	Rear
Spring		
Oil		
Rebound		
Piston		
Length		
Foam Insert	☐	☐
Hole In Cap	☐	☐

Transmission Setup

Front		Rear
Gear Diff	Spool	Gear Diff
Oil _____		Oil _____
Weight _____ g		Weight _____ g
Position _____		Position _____

Servo _____ Tires _____

Esc _____ Additive _____

Motor _____ Body _____

Spur _____ P/ _____ T Rear Wing _____

Pinon _____ P/ _____ T FDR NaN

Arn0 - PetitRC