XPRESS EXECUTE XQIIRR — SET-UP SHEET

Driver	Eric Lam	Track Surface				Track Temperature	
Date	2026/3/22	Track Traction	Medium	Result	A2	Air Temperature	
Track	TRC	Country	HongKong	Best Lap		Humidity	Remark

Front

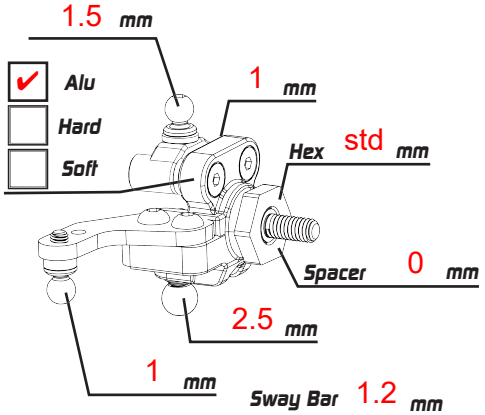

- [x] Alu
- [ ] Hard
- [ ] Soft

1.5 mm
1 mm
Hex std mm
Spacer 0 mm
2.5 mm
1 mm

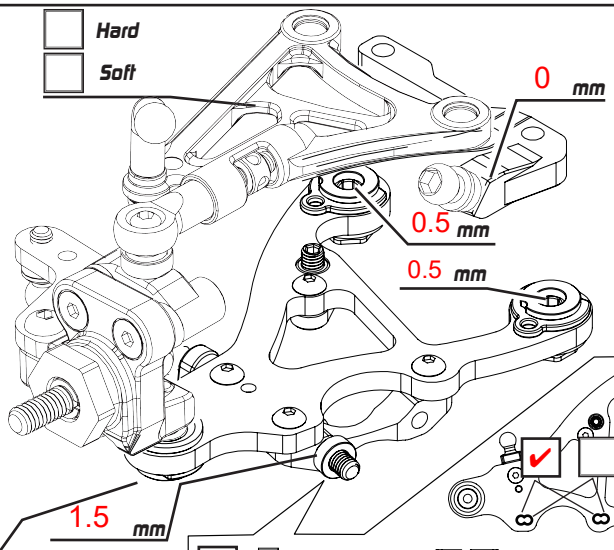

- [ ] Hard
- [ ] Soft

0 mm
0.5 mm
0.5 mm
1.5 mm

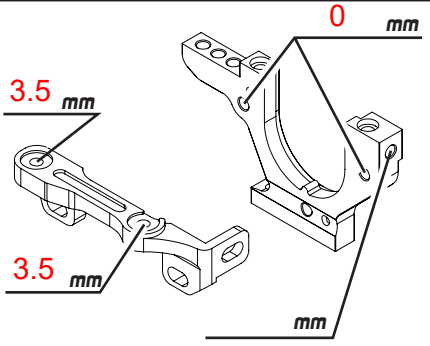

3.5 mm
3.5 mm
0 mm
mm

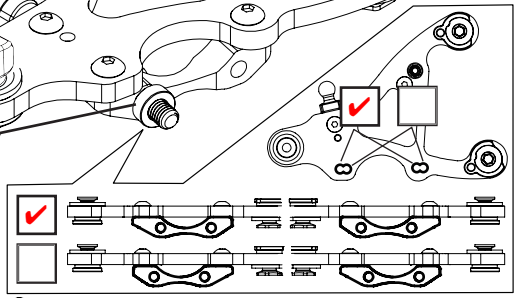



1 mm

Ride Height	5 mm	Sway Bar	1.2 mm
Toe	1	Camber	2
		Downstop	23.4 mm
		Gear Diff	
		Csf	
		Weight	
		Outer	mm
		Steering	26

- [x] Spool
- [x] High Diff
- [ ] Low Diff

- [x] 8.0
- [ ] 8.5
- [ ] 9.0

Remark

Shocks

Spring	2.7
Oil	325
Rebound	25%
Piston	4 x 1.1
Length	8.5
Note	caster 4

Rear

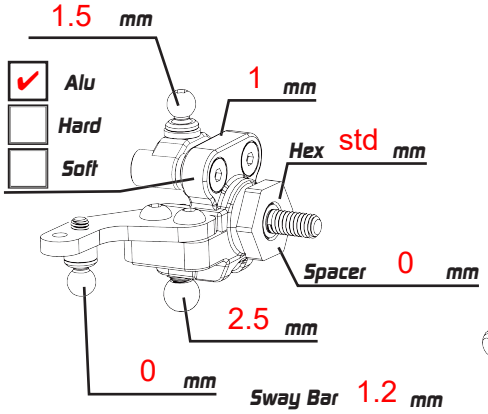

- [x] Alu
- [ ] Hard
- [ ] Soft

1.5 mm
1 mm
Hex std mm
Spacer 0 mm
2.5 mm
0 mm

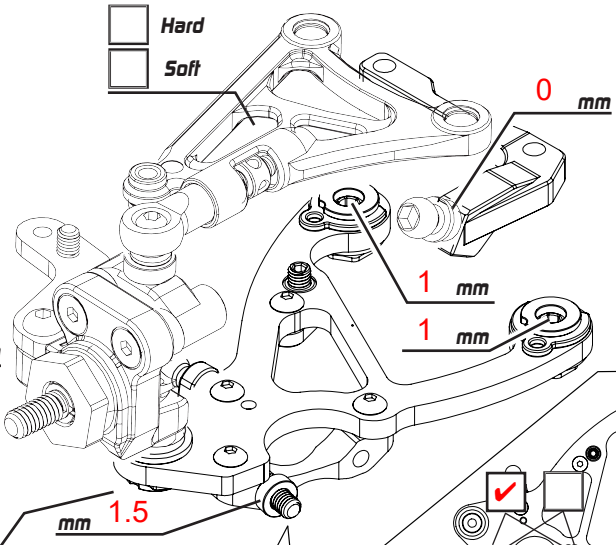

- [ ] Hard
- [ ] Soft

0 mm
1 mm
1 mm
mm 1.5

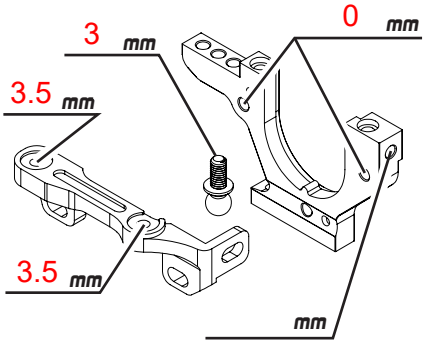

3 mm
3.5 mm
3.5 mm
0 mm
mm

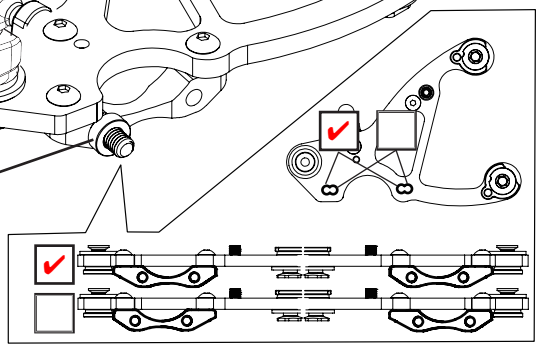

Ride Height	5.4 mm	Sway Bar	1.2 mm
Toe	3	Camber	2
		Downstop	22.4 mm
		Gear Diff	
		Csf	7000
		Weight	1.4

- [x] High Diff
- [ ] Low Diff

Remark

Shocks

Spring	2.8
Oil	350
Rebound	25%
Piston	4 x 1.1
Length	8.5
Note	caster 2

Weight g

Battery ONI 6500 Body MTB0415UL

Tires handout rush Additive v3 yellow

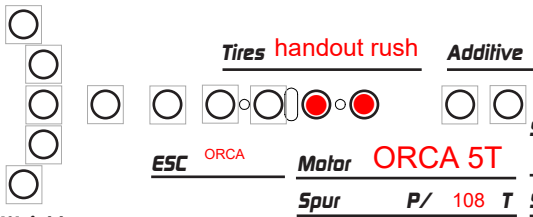

Servo Horn Height mm

ESC ORCA Motor ORCA 5T

Spur P/ 108 T Servo GTS2

Pinon P/ 29 T FDR 7.08

Weight g

Weight 10 g

- [ ] Carbon
- [x] Alu

Weight 10 g

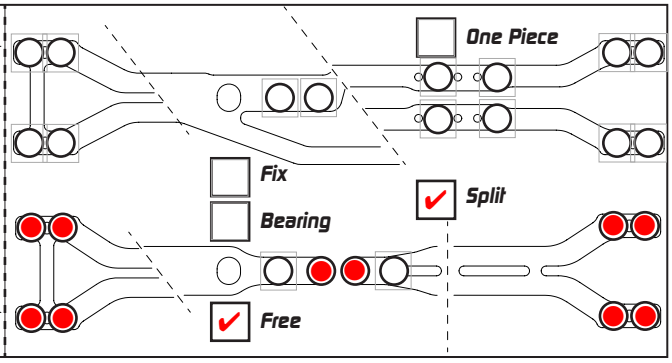

- [x] One Piece
- [ ] Fix
- [ ] Bearing
- [x] Split
- [x] Free