XPRESS EXECUTE XQ2S — SET-UP SHEET

Driver	Sascha Hengen	**Track Surface**	Indoor	Carpet	**Track Temperature**		
Date	18/04/2026	**Track Traction**	High	**Result**	A-Main	**Air Temperature**	18°C
Track	Intermodellbau - GT Sport	**Country**	D	**Best Lap**		**Humidity**		**Remark**	Mid Motor

Front

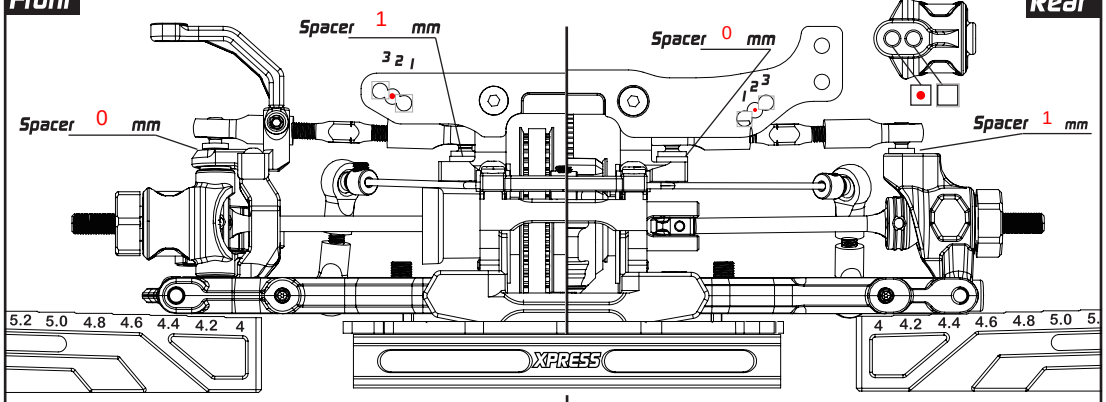

C-Hub	M ☐ H	
Steering Block	M ☐ H	
Suspension Arm	M ☐ H	
Hex Offset	6 mm	6 mm
Camber	2 °	2 °
Ride Height	5,4 mm	5,4 mm
DownStop	6,0 mm	5,4 mm
Sway Bar	1.3 mm	1.2 mm

Rear

Rear Hub	M ☐ H
Suspension Arm	M ☐ H

Optional — On-Power Control System

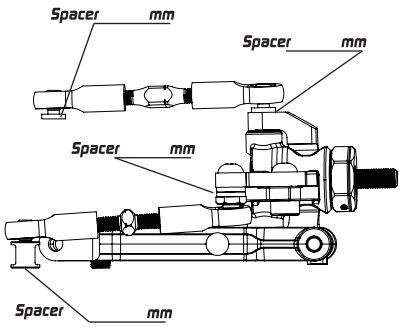

Hex Offset	mm	
Camber	°	
Ride Height	mm	
DownStop	mm	
Sway Bar	1.2 mm	
Steering Block	M ☐ H	
Suspension Arm	M ☐ H	

Front

Front Toe Out	1 °
Front Tire Additive Area	☐ ☐ ☐ ☐
Bump Steering Spacer	0 mm
Lower Arm Spacer	0 mm
Wheelbase Spacer	
FF	0 mm
FR	0 mm
Shock Tower Spacer	mm
Weight	g

Flex Control

☐	Aluminum
☑	Composite
☐	Composite (2 Dot)
☐	Bearing

Rear

Spacer	0 mm
Rear Toe In	2.0 °
Rear Tire Additive Area	☐ ☐ ☐ ☐
Lower Arm Spacer	0 mm
Shock Tower Spacer	0 mm
Wheelbase Spacer	
RF	0 mm
RR	0 mm
Weight	g

Suspension Mount Setup

FF

☑ 1 ☑ Aluminium
☐ 0.5 ☐ Brass

RR

☐ 1 ☐ Aluminium
☐ 0.5 ☐ Brass

Optional

FR

☐ 1 ☐ Aluminium ☐ Spilt
☐ 0.5 ☐ Brass ☐ Solid

RF

☐ 1 ☐ Aluminium ☐ Spilt
☐ 0.5 ☐ Brass ☐ Solid

Flex Control

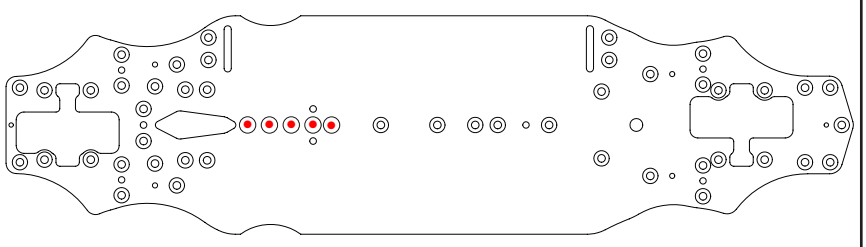

Damper Setup

	Front	Rear
Spring	XRay 2.7	Xray 2.5
Oil	450 cts	450 cts
Rebound	0	0
Piston	4	4
Length	10,5	10,5
Foam Insert	☐	☐
Hole In Cap	☑	☑

Transmission Setup

Front	Rear
Spool	**Gear Diff**
Oil	**Oil** 7000
Weight g	**Weight** g
Position Low	**Position** Low

Others

Servo	Savöx SB-2263MG	**Tires**	RCK-28C MX
Esc	HW Stoc Spec	**Additive**	MXLR R-1
Motor	RCK 17.5T	**Body**	ZooRacing BWOAH
Spur	64 **P/** 108 **T**	**Rear Wing**	Kit
Pinon	64 **P/** 36 **T**	**FDR**	5.699