

SET-UP SHEET

XRAY X12

RACE	Nirk practise III - Copy	
TRACK	Nokian renkaat	

NAME	Peakki	
CITY / COUNTRY	Tampere	Finland
CONTACT	peakki[]	

DATE	09/01/2012	
TEMPERATURE / °F or °C	AIR	TRACK

QUALIFYING POSITION	BEST LAPTIME / sec	FINAL POSITION	RACE LENGTH / minutes
	10,69		

TRACK CONDITION	☒ CARPET	☐ ASPHALT
	☐ TECHNICAL	☒ MIXED
	☐ FAST	
TRACTION		
	☐ LOW	☒ MEDIUM
	☐ HIGH	

CENTER SHOCK ABSORBER			
SPRING	gold	OIL / cSt	700
		REBOUND%	

SIDE LINKAGES	
OIL / cSt	ur 30k

FRONT	TIRES	REAR
parma purple		grp Magenta
41,5	DIAMETER/mm	43,0
cs hq	ADDITIVE	cs hq
10	ADDITIVE timing	20



FRONT LEFT	FRONT RIGHT	ADDITIVE TREATED AREA	REAR LEFT	REAR RIGHT
				

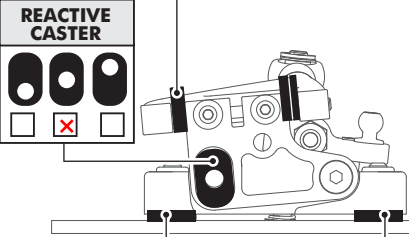
TRANSMISSION	
DIFF SETTING	
☐ LOOSE	☐ MEDIUM
☒ TIGHT	☐

PINION / T	22	SPUR GEAR/T	95
FINAL DRIVE RATIO	4.3181818181818	ROLLOUT	31.267789473684

MOTOR	
BRAND	Orion Vortex VST
TURN	4.0T
ROTOR	std
TIMING	0mm

ESC	SP GT 2.1 EX	
ESC SETTING	PROGRAM	PUNCH
	INITIAL BRAKE	AUTO BRAKE
	0	0
BATTERIES	CRC 6300	
BODY	Black Art 05	

FRONT	SHOCK ABSORBER	POD PLANE
		UNLOADED LOADED
SHIMS 4,5 / mm	SHIMS 1,5 / mm	
RIDE HEIGHT / mm	MID RIDE HEIGHT / mm	RIDE HEIGHT / mm

FRONT	REAR
CASTER	RIDE HEIGHT
2mm ☐ 1mm ☒ 0.5mm ☒ 0mm ☐	5% 0 0.5 1 1.5 2 2.5
REACTIVE CASTER	SIDE SPRING
	yokomo black ss
RIDE HEIGHT SHIMS 0,75 / mm	

FRONT	FRONT	REAR
SHIMS / mm	SHIMS 0 / mm	SHIMS 0,2 / mm
SHIMS / mm	SHIMS / mm	SHIMS / mm
SHIMS / mm	SHIMS / mm	SHIMS / mm
SPRINGS	SPRINGS	SPRINGS
☐ GOLD C=3.5	☒ SILVER C=4.0	☐ BLACK C=5.0
☐ GREY C=6.0		
OTHER	OTHER	OTHER
CAMBER / degr.	1	1
LEFT		RIGHT

TOE / degr.	SERVO POSITION	SHIMS
OUT 1	RIGHT ☒ LEFT ☐	0 / mm
ACKERMANN	SHIMS / mm	
BRACE	GRAPHITE ☐	ALU ☐
OTHER	OTHER	
FRONT WIDTH SHIM 0,5 / mm	LINKAGE POSITION	CHASSIS
	2 0 0 2 1 0 0 1	STANDARD ☒ OTHER
REAR WIDTH SHIM 171,8 / mm		

COMMENTS
24x14mm track
44l 8.04 11.00 avg
long upper link: 1,5mm shim between caster block and arm
1m in servo, 1mm behind steering links - less acceraman
one hole in shock piston
esc:
boost: 0
ddrs punch: 3
turbo: 16