

SETUP SHEET

XRAY X4F'27

EVENT			
TRACK			
DRIVER		DATE	
COUNTRY		CITY	


TRACK TEMP.	QUAL POS.	FINAL POS.	BEST LAP TIME	LAPS	TIME
			/sec		/

TRACK			
COMPOSITION	☐ CARPET	☐ ASPHALT (☐ INDOOR ☐ OUTDOOR)	
LAYOUT	☐ TECHNICAL	☐ MIXED	☐ FAST
TRACTION	☐ LOW	☐ MEDIUM	☐ HIGH

TRANSMISSION			
GEAR DIFFERENTIAL - OIL	/cSt	DIFFERENTIAL POSITION	UP ☐ DOWN ☐
PINION / T	SPUR GEAR / T	FINAL DRIVE RATIO	BEARING HOLDER KIT ☐ ALU ☐


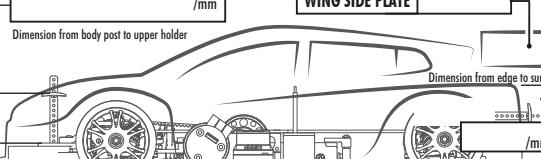
FRONT	SHOCKS	REAR
	SPRINGS	
	OIL /cSt	
	REBOUND %	
☐ PSS		☐ PSS
SHOCK LENGTH /mm		SHOCK LENGTH /mm

THICKNESS/mm	ANTI-ROLL BAR	THICKNESS/mm
--------------	---------------	--------------

TIRES		
ADDITIVE		
ADDITIVE TIMING		
WIPE OFF TIME		
TIRE WARMERS	Timing - Fr:	Rr:
	Temp. - Fr:	Rr:
SIDE WALL GLUE DIA. /mm		
	FRONT TIRES ADDITIVE AREA /mm	

TOTAL WEIGHT	/g	WEIGHT BALANCE	FRONT %	REAR %
--------------	----	----------------	---------	--------


MOTOR	TIMING	RPM LIMIT
ESC	BATTERIES	
BODY	WING	


	Dimension from body post to window bottom line /mm	BODY POSITION
	Dimension from body post to upper holder /mm	WING SIDE PLATE
	Dimension from edge to surface /mm	

FRONT REINFORCEMENT	TOP DECK FLEX	REAR REINFORCEMENT	TOP DECK CUTTING
---------------------	---------------	--------------------	------------------

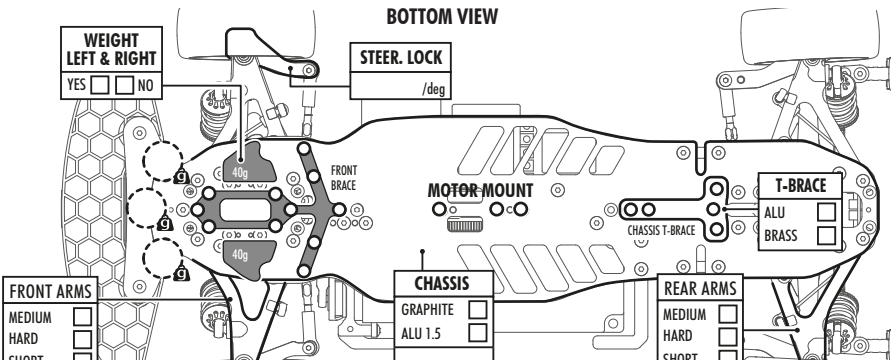
FRONT ARMS	MEDIUM ☐ HARD ☐ SHORT ☐
------------	--

FRONT CASTER 5° 4° 3° Adjust with eccentric bushings	Upper links CASTER	FRONT & REAR SUSPENSION	REAR CASTER 0.5° 1.5° 2.5° 3.5° 4.5° 5.5° Adjust with eccentric bushings	Upper links CASTER
BUMP STEER /mm	HEIGHT /mm	SHIM /mm	TOE GAIN /mm	
FF /mm	FR /mm	☐ SERVO SAVER ☐ SERVO HORN	RF /mm	RR /mm
RIDE HEIGHT	RIDE HEIGHT		RIDE HEIGHT	

CAMBER /deg Left=Right	BODY STOP YES ☐ NO ☐	SHIM /mm	PLAY /mm	FF /mm	FR /mm	SHIMS /mm	FRONT HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
							
#107712							
DOWNSTOP /mm	Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW YES ☐ NO ☐	DRIVE SHAFT 58mm 59mm	SHIM /mm	DROOP /mm	Set with shocks ☐ Set without shocks ☐	

CAMBER /deg Left=Right	SHIM /mm	PLAY /mm	RF /mm	RR /mm	SHIMS /mm	REAR HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
						
#107712						
DOWNSTOP /mm	Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW YES ☐ NO ☐	SHIM /mm	DROOP /mm	Set with shocks ☐ Set without shocks ☐	

TOE OUT	TOE IN	TOP VIEW
BUMPER WEIGHT YES ☐ NO ☐	UPPER CLAMP KIT ☐ -1mm	SHIMS /mm
FRONT UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐	CHASSIS FLEX NO BRACE ☐ MEDIUM ☐ STIFF ☐	REAR UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐
HUB OFFSET	SHIM /mm	HUB OFFSET

WEIGHT LEFT & RIGHT YES ☐ NO ☐	STEER. LOCK /deg	FRONT BRACE	MOTOR MOUNT	T-BRACE ALU ☐ BRASS ☐
				
FRONT ARMS MEDIUM ☐ HARD ☐ SHORT ☐	CHASSIS GRAPHITE ☐ ALU 1.5 ☐	REAR ARMS MEDIUM ☐ HARD ☐ SHORT ☐		