

SETUP SHEET

XRAY X4F'27

EVENT			
TRACK			
DRIVER		DATE	
COUNTRY		CITY	


TRACK TEMP.	QUAL POS.	FINAL POS.	BEST LAP TIME	LAPS	TIME
			/sec		/

TRACK	
COMPOSITION	☐ CARPET ☐ ASPHALT (☐ INDOOR ☐ OUTDOOR)
LAYOUT	☐ TECHNICAL ☐ MIXED ☐ FAST
TRACTION	☐ LOW ☐ MEDIUM ☐ HIGH

TRANSMISSION	
GEAR DIFFERENTIAL - OIL	/cSt
DIFFERENTIAL POSITION	UP ☐ DOWN ☐
PINION / T	SPUR GEAR / T
FINAL DRIVE RATIO	BEARING HOLDER KIT ☐ ALU ☐


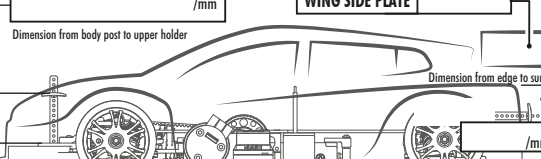
FRONT	SHOCKS	REAR
	SPRINGS	
	OIL /cSt	
	REBOUND %	
☐ PSS		☐ PSS
SHOCK LENGTH	/mm	SHOCK LENGTH
	/mm	

THICKNESS/mm	ANTI-ROLL BAR	THICKNESS/mm
--------------	---------------	--------------

TIRES	
ADDITIVE	
ADDITIVE TIMING	
WIPE OFF TIME	
TIRE WARMERS	Timing - Fr: Rr: Temp. - Fr: Rr:
	FRONT TIRES ADDITIVE AREA
SIDE WALL GLUE DIA. /mm	/mm

TOTAL WEIGHT	/g	WEIGHT BALANCE	FRONT %	REAR %
--------------	----	----------------	---------	--------

MOTOR	TIMING	RPM LIMIT
ESC	BATTERIES	
BODY	WING	

	BODY POSITION
Dimension from body post to window bottom line	/mm
	WING SIDE PLATE
Dimension from body post to upper holder	/mm
Dimension from edge to surface	/mm

FRONT REINFORCEMENT	TOP DECK FLEX	REAR REINFORCEMENT	TOP DECK CUTTING
---------------------	---------------	--------------------	------------------

FRONT ARMS	MEDIUM ☐ HARD ☐ SHORT ☐
------------	--

FRONT CASTER 5° 4° 3° Adjust with eccentric bushings	Upper links CASTER	BUMP STEER /mm	HEIGHT /mm	SHIM /mm	FRONT & REAR SUSPENSION	REAR CASTER 0.5° 1.5° 2.5° 3.5° 4.5° 5.5° Adjust with eccentric bushings	Upper links CASTER
TOE GAIN /mm	TOE IN	TOE OUT	TOE IN	TOE OUT	TOE IN	TOE OUT	TOE IN
FF /mm	FR /mm	RF /mm	RR /mm	SHIMS /mm	SHIMS /mm	SHIMS /mm	SHIMS /mm
RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT	RIDE HEIGHT
☐ SERVO SAVER	☐ SERVO HORN	☐ SERVO SAVER	☐ SERVO HORN	☐ SERVO SAVER	☐ SERVO HORN	☐ SERVO SAVER	☐ SERVO HORN

CAMBER /deg Left=Right	BODY STOP YES ☐ NO ☐	SHIM /mm	PLAY /mm	FF /mm	FR /mm	SHIMS /mm	FRONT HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
#107712	DOWNSTOP /mm	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐
Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW	58mm	59mm	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm
Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW	58mm	59mm	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm

CAMBER /deg Left=Right	SHIM /mm	PLAY /mm	RF /mm	RR /mm	SHIMS /mm	REAR HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
#107712	DOWNSTOP /mm	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐	YES ☐ NO ☐
Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW	58mm	59mm	SHIM /mm	SHIM /mm	SHIM /mm
Set with shocks ☐ Set without shocks ☐	SUSPENSION FLEX SCREW	58mm	59mm	SHIM /mm	SHIM /mm	SHIM /mm

TOE OUT	TOE IN	ARS LINKS POSITION	UPPER CLAMP KIT ☐ -1mm	SHIMS /mm	BATTERY WEIGHT PLATE	UPPER CLAMP FLEX	UPPER CLAMP FLEX
BUMPER WEIGHT YES ☐ NO ☐	FRONT UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐	CHASSIS FLEX NO BRACE ☐ MEDIUM ☐ STIFF ☐	REAR UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐	ACKERMANN BUSHINGS	HUB OFFSET	HUB OFFSET	HUB OFFSET
HUB OFFSET	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm	SHIM /mm

WEIGHT LEFT & RIGHT YES ☐ NO ☐	STEER. LOCK /deg	FRONT BRACE	MOTOR MOUNT	T-BRACE ALU ☐ BRASS ☐
FRONT ARMS MEDIUM ☐ HARD ☐ SHORT ☐	CHASSIS GRAPHITE ☐ ALU 1.5 ☐	REAR ARMS MEDIUM ☐ HARD ☐ SHORT ☐	CHASSIS T-BRACE	CHASSIS T-BRACE