

SETUP SHEET

XRAY X4F'27

EVENT			
TRACK			
DRIVER		DATE	
COUNTRY		CITY	


TRACK TEMP.	QUAL POS.	FINAL POS.	BEST LAP TIME	LAPS	TIME
			/sec		/

TRACK	
COMPOSITION	☐ CARPET ☐ ASPHALT (☐ INDOOR ☐ OUTDOOR)
LAYOUT	☐ TECHNICAL ☐ MIXED ☐ FAST
TRACTION	☐ LOW ☐ MEDIUM ☐ HIGH

TRANSMISSION	
GEAR DIFFERENTIAL - OIL	/cSt DIFFERENTIAL POSITION UP ☐ DOWN ☐
PINION / T	SPUR GEAR / T FINAL DRIVE RATIO
BEARING HOLDER KIT ☐ ☐ ALU	

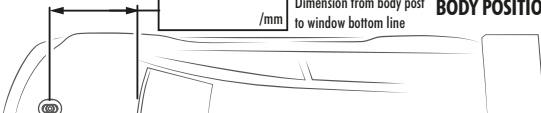
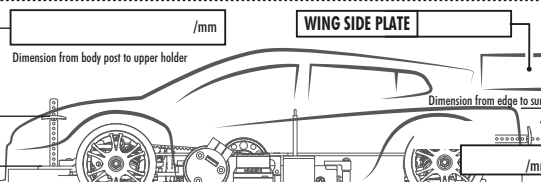
FRONT	SHOCKS	REAR
	SPRINGS	
	OIL /cSt	
	REBOUND %	
☐ PSS		☐ PSS
SHOCK LENGTH	/mm	SHOCK LENGTH

THICKNESS/mm	ANTI-ROLL BAR	THICKNESS/mm
--------------	---------------	--------------

TIRES		
ADDITIVE		
ADDITIVE TIMING		
WIPE OFF TIME		
TIRE WARMERS	Timing - Fr:	Rr: Temp. - Fr: Rr:
	FRONT TIRES ADDITIVE AREA /mm	

TOTAL WEIGHT	/g	WEIGHT BALANCE	FRONT %	REAR %
--------------	----	----------------	---------	--------

MOTOR	TIMING	RPM LIMIT
ESC	BATTERIES	
BODY	WING	

	BODY POSITION
	WING SIDE PLATE

FRONT REINFORCEMENT	TOP DECK FLEX	REAR REINFORCEMENT	TOP DECK CUTTING
---------------------	---------------	--------------------	------------------

FRONT ARMS	CHASSIS	REAR ARMS
MEDIUM ☐	GRAPHITE ☐	MEDIUM ☐
HARD ☐	ALU 1.5 ☐	HARD ☐
SHORT ☐		SHORT ☐

FRONT CASTER 5° 4° 3° Adjust with eccentric bushings	FRONT & REAR SUSPENSION Upper links CASTER BUMPER STEER /mm HEIGHT /mm SHIM /mm	REAR CASTER 0.5° 1.5° 2.5° 3.5° 4.5° 5.5° Adjust with eccentric bushings	Upper links CASTER TOE GAIN /mm
/mm FF RIDE HEIGHT	/mm FR RIDE HEIGHT	/mm RF RIDE HEIGHT	/mm RR RIDE HEIGHT
☐ SERVO SAVER ☐ SERVO HORN			

FRONT CAMBER /deg Left=Right BODY STOP YES ☐ NO ☐ SHIM /mm PLAY /mm #107712 DOWNSTOP /mm Set with shocks ☐ Set without shocks ☐	FF FR SHIMS /mm DRIVE SHAFT SHIM /mm SUSPENSION FLEX SCREW YES NO YES NO 58mm 59mm DROOP /mm	FRONT HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
---	---	---

REAR CAMBER /deg Left=Right SHIM /mm PLAY /mm #107712 DOWNSTOP /mm Set with shocks ☐ Set without shocks ☐	RF RR SHIMS /mm SUSPENSION FLEX SCREW YES NO YES NO SHIM /mm DROOP /mm	REAR HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
--	---	--

TOP VIEW TOE OUT BUMPER WEIGHT YES ☐ NO ☐ UPPER CLAMP KIT ☐ -1mm SHIMS /mm BATTERY WEIGHT PLATE ARS LINKS POSITION UPPER CLAMP FLEX FRONT UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐ HUB OFFSET ☐ SHIM /mm	TOE IN CHASSIS FLEX NO BRACE ☐ MEDIUM ☐ STIFF ☐ REAR UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐ HUB OFFSET ☐ SHIM /mm
ACKERMANN BUSHINGS	

WEIGHT LEFT & RIGHT YES ☐ NO ☐	STEER. LOCK /deg	FRONT BRACE 40g	MOTOR MOUNT	T-BRACE ALU ☐ BRASS ☐
FRONT ARMS	CHASSIS	REAR ARMS		
MEDIUM ☐	GRAPHITE ☐	MEDIUM ☐		
HARD ☐	ALU 1.5 ☐	HARD ☐		
SHORT ☐		SHORT ☐		