

SETUP SHEET

XRAY X4F'27

EVENT			
TRACK			
DRIVER		DATE	
COUNTRY		CITY	

TRACK TEMP.	QUAL POS.	FINAL POS.	BEST LAP TIME	LAPS	TIME
			/sec		/

TRACK			
COMPOSITION	☐ CARPET	☐ ASPHALT (☐ INDOOR ☐ OUTDOOR)	
LAYOUT	☐ TECHNICAL	☐ MIXED	☐ FAST
TRACTION	☐ LOW	☐ MEDIUM	☐ HIGH

TRANSMISSION			
GEAR DIFFERENTIAL - OIL	/cSt	DIFFERENTIAL POSITION	UP ☐ DOWN ☐
PINION / T	SPUR GEAR / T	FINAL DRIVE RATIO	BEARING HOLDER KIT ☐ ALU ☐


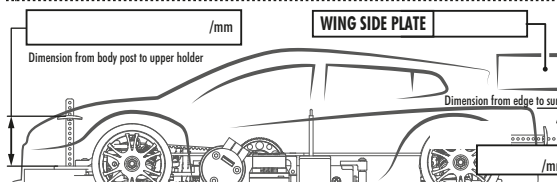
FRONT	SHOCKS	REAR
	SPRINGS	
	OIL /cSt	
	REBOUND %	
☐ PSS		☐ PSS
SHOCK LENGTH	/mm	SHOCK LENGTH

THICKNESS/mm	ANTI-ROLL BAR	THICKNESS/mm
--------------	---------------	--------------

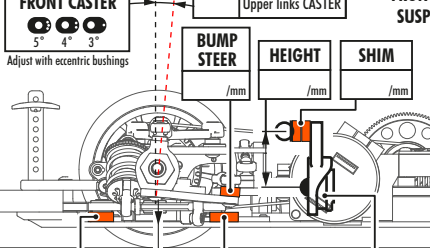
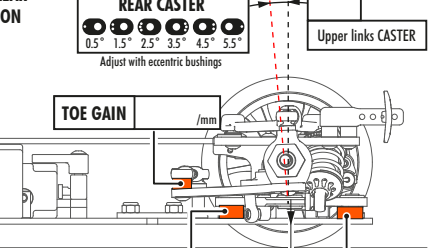
TIRES		
ADDITIVE		
ADDITIVE TIMING		
WIPE OFF TIME		
TIRE WARMERS	Timing - Fr:	Rr:
	Temp. - Fr:	Rr:
SIDE WALL GLUE		
DIA. /mm		
FRONT TIRES		
ADDITIVE AREA		

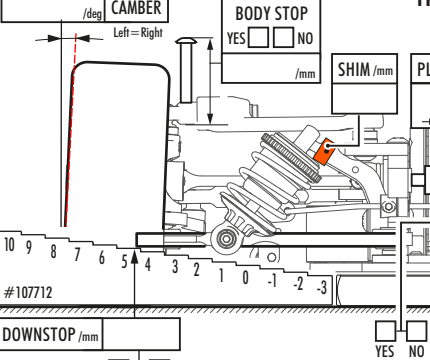
TOTAL WEIGHT	/g	WEIGHT BALANCE	FRONT %	REAR %
--------------	----	----------------	---------	--------

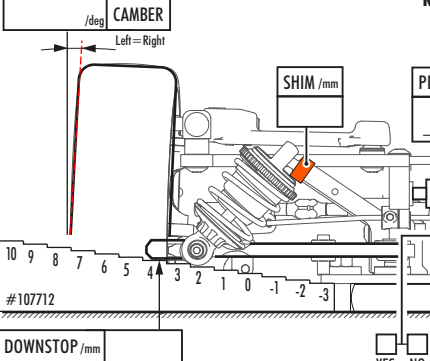
MOTOR	TIMING	RPM LIMIT
ESC	BATTERIES	
BODY	WING	

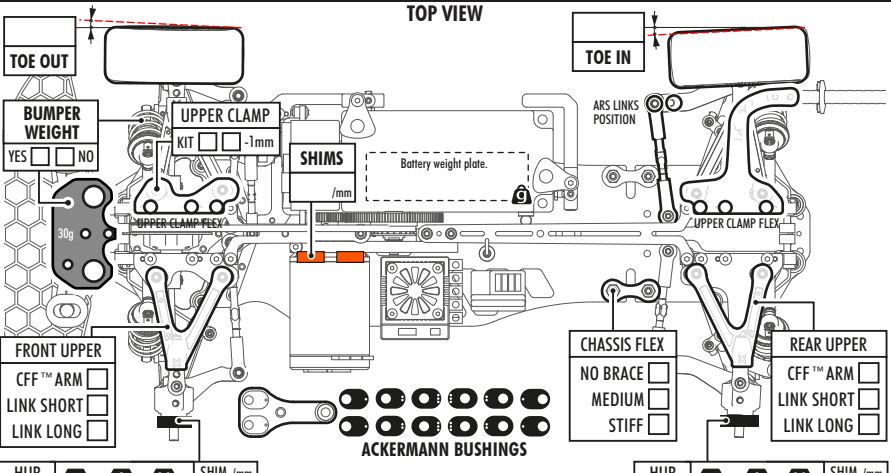
 Dimension from body post to window bottom line	BODY POSITION
 Dimension from body post to upper holder Dimension from edge to surface	WING SIDE PLATE

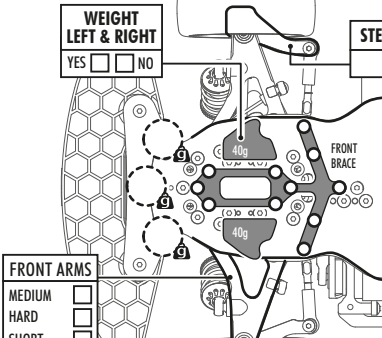
FRONT REINFORCEMENT	TOP DECK FLEX	REAR REINFORCEMENT	TOP DECK CUTTING
---------------------	---------------	--------------------	------------------

FRONT CASTER  5° 4° 3° Adjust with eccentric bushings	Upper links CASTER /mm	BUMP STEER /mm	HEIGHT /mm	SHIM /mm
FRONT & REAR SUSPENSION 	REAR CASTER  0.5° 1.5° 2.5° 3.5° 4.5° 5.5° Adjust with eccentric bushings	Upper links CASTER /mm	TOE GAIN /mm	FR /mm RIDE HEIGHT ☐ ☐ ☐
FF ☐ ☐ ☐	FR ☐ ☐ ☐	☐ SERVO SAVER ☐ SERVO HORN	RF ☐ ☐ ☐	RR ☐ ☐ ☐

FRONT 	FRONT HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
CAMBER /deg Left = Right	SHIM /mm PLAY /mm DOWNSTOP /mm Set with shocks ☐ Set without shocks ☐
FF FR ☐ SHIMS /mm	DRIVE SHAFT SHIM /mm 58mm 59mm Set with shocks ☐ Set without shocks ☐
SUSPENSION FLEX SCREW YES NO YES NO	DROOP /mm Set with shocks ☐ Set without shocks ☐

REAR 	REAR HUB MEDIUM ☐ GRAPH. ☐ HARD ☐ ALU ☐
CAMBER /deg Left = Right	SHIM /mm PLAY /mm DOWNSTOP /mm Set with shocks ☐ Set without shocks ☐
RF RR ☐ SHIMS /mm	DRIVE SHAFT SHIM /mm 58mm 59mm Set with shocks ☐ Set without shocks ☐
SUSPENSION FLEX SCREW YES NO YES NO	DROOP /mm Set with shocks ☐ Set without shocks ☐

TOP VIEW 	
TOE OUT BUMPER WEIGHT YES ☐ NO ☐	TOE IN UPPER CLAMP KIT ☐ -1mm SHIMS /mm
FRONT UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐	CHASSIS FLEX NO BRACE ☐ MEDIUM ☐ STIFF ☐
HUB OFFSET  SHIM /mm	REAR UPPER CFF™ ARM ☐ LINK SHORT ☐ LINK LONG ☐
ACKERMANN BUSHINGS 	HUB OFFSET  SHIM /mm

WEIGHT LEFT & RIGHT YES ☐ NO ☐	STEER. LOCK /deg
FRONT ARMS MEDIUM ☐ HARD ☐ SHORT ☐	CHASSIS GRAPHITE ☐ ALU 1.5 ☐
FRONT BRACE 	T-BRACE ALU ☐ BRASS ☐
REAR ARMS MEDIUM ☐ HARD ☐ SHORT ☐	CHASSIS T-BRACE 