

MR-4TCSD

SETTING SHEET

DRIVER

Andrew Robson

DATE

20/01/04

CIRCUIT

Environment ➔ ☒ Indoor ➔ ☐ Outdoor
 Surface ➔ ☐ Asphalt ➔ ☐ Concrete ➔ ☒ Carpet
 Grip ➔ ☒ High ➔ ☐ Regular ☒ low
 Condition ➔ ☒ Flat ➔ ☐ Bumpy

FRONT


Drivetrain ➔ ☐ One-way
 ➔ ☒ Ball diff
 ➔ ☐ Solid
 Anti-roll bar ➔ ☐ None
 ➔ ☐ Upper
 ➔ ☒ Lower
 ➔ **silver**
 Hub carrier ➔ **4°**
 Camber ➔ **-2**
 Toe angle ➔ **+1°**
 Suspension mount skid angle ➔ **1**
 Suspension mount height spacer (front & rear) ➔ **0** mm

Diaphragm ➔ ☐ _____
 Aeration ➔ ☒ _____
 Shock body ➔ ☒ SSS
 ➔ ☐ SS
 Shock end ➔ ☐ Long
 ➔ ☒ Short
 ➔ ☐ _____
 Length ➔ **61.5** mm
 Spring ➔ **Yoko Green**
 Oil ➔ **YS450**
 Piston ➔ **no.3**


Droop height

6 mm

Upper camber link & shock mounting position

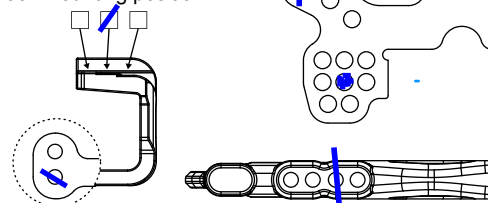

Lower suspension arm position



REAR


Anti-roll bar ➔ ☒ None
 ➔ ☐ Upper
 ➔ ☐ Lower
 ➔ _____
 Camber ➔ **-1**
 Suspension mount (toe angle) ➔ ☐ 1 deg
 ➔ ☐ 2 deg
 ➔ ☒ 3 deg
 Suspension mount skid angle ➔ **0**
 Suspension mount height spacer (front & rear) ➔ **0** mm

Diaphragm ➔ ☐ _____
 Aeration ➔ ☒ _____
 Shock body ➔ ☒ SSS
 ➔ ☐ SS
 Shock end ➔ ☐ Long
 ➔ ☒ Short
 ➔ ☐ _____
 Length ➔ **62** mm
 Spring ➔ **yoko pink**
 Oil ➔ **YS400**
 Piston ➔ **no.3**


Droop height

4 mm

Upper camber link & shock mounting position

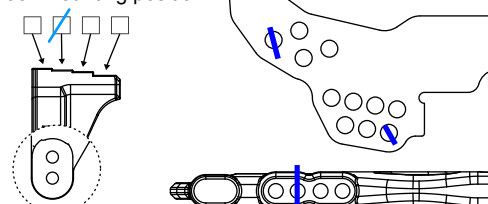

Lower suspension arm position



OTHER

Tire ➔ **pit shimizu D20**
 Inner ➔ **Yokomo**
 Wheel ➔ **TW1012-2**
 Traction additive ➔ ☐ None
 ➔ ☒ **NONE**
 Spur gear ➔ **P 72 T**
 Pinion gear ➔ **P 27 T**
 Gear ratio ➔ **_____ : 1**
 = spur gear / pinion gear x 2.35 (internal drive ratio)
 Ride height ➔ F **5.5** mm
 ➔ R **6** mm

Motor ➔ **NOVAK BRUSHLESS**
 Battery ➔ **SMC GP3300**
 ESC ➔ **Novak GT7**
 Front body mount position ➔ ☒ Inner
 ➔ ☐ Outer
 Body ➔ **PROTOform Dodge ver.1**
 Wing ➔ _____

COMMENT