YOKOMO MR-4TC BD SETTING SHEET

DRIVER	**Olly Jeffries**

DATE **05** / **03** / **06**


CIRCUIT	**Carpet wars Rd. 6**
ENVIRONMENT	⊘INDOOR ○OUTDOOR
SURFACE	○ASPHALT ○CONCRETE ⊘CARPET
GRIP	⊘HIGH ○REGULAR
CONDITION	⊘FLAT ○BUMPY


	FRONT	REAR	
DRIVETRAIN	⊘ONE-WAY ○BALL DIFF ○SOLID AXLE	CENTER PULLEY ⊘ONE-WAY ○DIRECT	BALL DIFF
ANTI-ROLL BAR	○NONE ○UPPER ( ) ⊘LOWER (**Gold**)	○NONE ○UPPER ( ) ⊘LOWER (**Silver**)	
STEERING BLOCK	⊘0 OFFSET (INLINE) ○1 OFFSET		
HUB CARRIER	**4 deg**	⊘0 DEG ○0.5 DEG ○1 DEG	
CAMBER / TOE-IN	CAMBER (**2**) ° / TOE-IN (**0**) °	CAMBER (**2**) ° / TOE-IN BLOCK ○2° ○2.5° ⊘3°	
SUSP. MOUNT SKID ANGLE	(**0**) °	(**0**) °	
HEIGHT SPACER	(**2**) mm UNDER BOTH SUSP. MOUNTS	(**1**) mm UNDER BOTH SUSP. MOUNTS	
DROOP	**5.5**	**5.5**	
SUSP. ARM POS.	FRONT (**4**) mm / REAR (**0**) mm	FRONT (**2**) mm / REAR (**2**) mm	

SHOCK BLADDER	⊘BLADDER (**rayspeed yellow**) ⊘PRESSURE	
SHOCK BODY	⊘SSS ○SS	⊘SSS ○SS
SHOCK END	○LONG ⊘SHORT ○ASSOCIATED	○LONG ⊘SHORT ○ASSOCIATED
SHOCK LENGTH	**63** mm	**63** mm
SHOCK SPRING	**Rayspeed Blue**	**Rayspeed Blue**
SHOCK OIL	**#500**	**#500**
SHOCK PISTON	**RS14**	**RS14**
BUMP STOP	O RING (**0**) PIECES	O RING (**0**) PIECES

UPPER CAMBER LINK POSITION

SHOCK POSITION

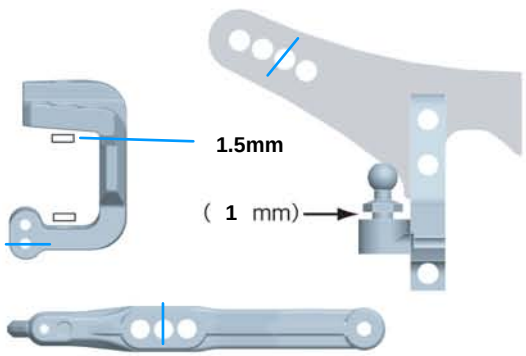

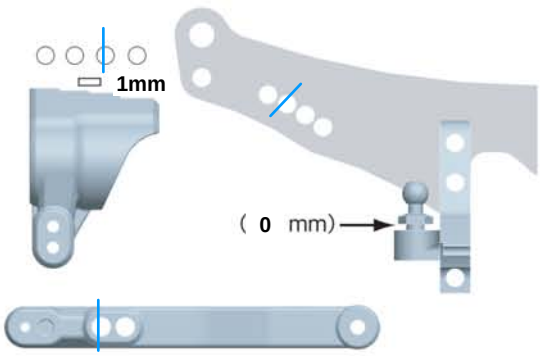

RIDE HEIGHT	**5.5** mm	**5.6** mm

TIRE	TIRE (**control**) TRACTION ADDITIVE (**CML**) INSERT ( ) WHEEL ( )
ELECTRONICS	MOTOR (**checkpoint 7x1**) BATTERY (**Novak 3700**) ESC (**Novak GTX**)
GEAR	SPUR GEAR (**64**) PITCH (**104**) T ÷ PINION GEAR (**64**) PITCH (**32**) T x 2.0 = GEAR RATIO (: 1)
BODY	BODY (**RS26**) WING (**yokomo**) BODY MOUNT POS. ⊘INNER ○OUTER
COMMENTS	