Factory Team RC8

Setup Sheet for Team Associated's RC8

:: Driver: TEAM ASSOCIATED :: Date: _____

:: Track: KIT RC8 SETUP

:: Event: _____

Reset Fields **Rev. 2**

:: Front Suspension

anti-roll bar:
- ☐ 2.2 - black
- ☑ 2.5 - silver
- ☐ 2.8 - gold

kickup bushing: # 2 — ☐ up ☑ down

steering rack:
- back
- mid
- front

hinge pin bushing: # 1 — ☐ up ☐ down

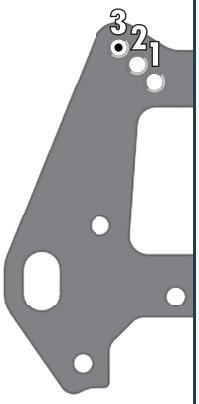

camber: -2 °

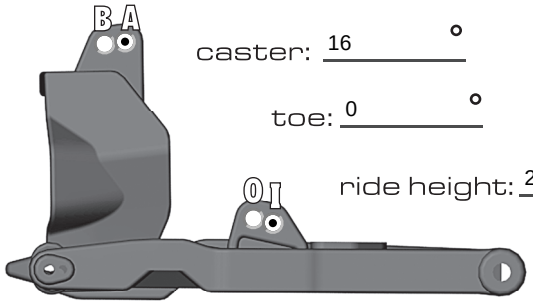

caster: 16 °

toe: 0 °

ride height: 27 mm

:: Rear Suspension

anti-roll bar:
- ☐ 2.2 - black
- ☐ 2.5 - silver
- ☑ 2.8 - gold

anti-squat bushing: # 2 — ☐ up ☑ down

wheelbase:
- ☐ long
- ☑ medium
- ☐ short

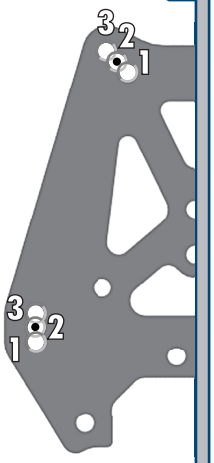

camber: -2 °

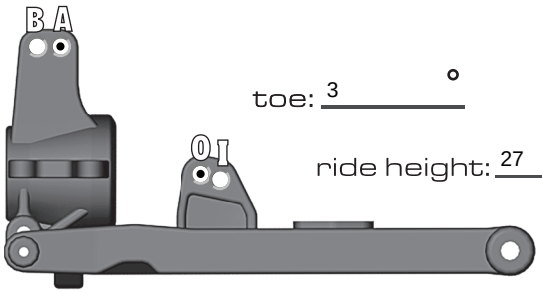

toe: 3 °

ride height: 27 mm

:: Front Shocks

spring: 70 RATE — piston: 1.6

shock fluid: 50 WT — length: FULL 108MM

:: Rear Shocks

spring: 59 RATE — piston: 1.6

shock fluid: 40 WT — length: FULL 125MM

:: Differentials

front fluid: 5000 CST

center fluid: 7000 CST

rear fluid: 3000 CST

:: Wing

location: ☐ forward ☑ back

angle: ☐ low ☑ med. ☐ high

type: STANDARD

:: Notes

:: Engine

engine: _____ restrictor: _____

muffler: _____ temp: _____

glow plug: _____

fuel: 30% RECOMMENDED

:: Gearing/Clutch

gearing: 16/44

clutch shoes: STANDARD

clutch spring: ☐ .9mm ☑ 1.0mm ☐ 1.1 mm

other: _____

:: Front Tires

tire: _____

compound: _____

insert: _____

wheel: _____

:: Rear Tires

tire: _____

compound: _____

insert: _____

wheel: _____

:: Race and Vehicle Comments

qualify: _____ main: _____ finish: _____ tq: ☐

comments: _____

:: Track Info

smooth: ☐ bumpy: ☐ blue groove: ☐

traction: ☐ high ☐ med. ☐ low

soft dirt: ☐ grass: ☐ clay: ☐ wet: ☐

dusty: ☐ other: _____

:: More setups: www.RC10.com / www.TeamAssociated.com