

X5B SETUP SHEET

NAME: _____ TRACK COMPOSITION: _____
 DATE: _____ LAYOUT: ☐ TIGHT ☐ MIXED ☐ TECHNICAL
 RACE: _____ TRACTION: ☐ LOW ☐ MEDIUM ☐ HIGH
 TRACK: _____ SURFACE: ☐ SMOOTH ☐ BUMPY

AIR TEMP ☐ F° ☐ °C
 LAPS
 BEST LAP TIME in LAP

DIFFERENTIAL OIL

FRONT	CENTER	REAR
☐ STD	☐ STD	☐ STD

CLUTCH

SHOE BRAND

COMPOUND ☐ ALUM ☐ CARBON

SPRING BRAND

TENSION mm

CLUTCH SHOES SHOE

GEARING

SPUR GEAR T

PINION GEAR T

TIRES

FRONT TYPE

COMPOUND

INSERT

REAR TYPE

COMPOUND

INSERT

ENGINE

TYPE

PORT

PLUG


☐ NORMAL ☐ TURBO

HEAD CLEARANCE

PIPE

FUEL BRAND

FRONT

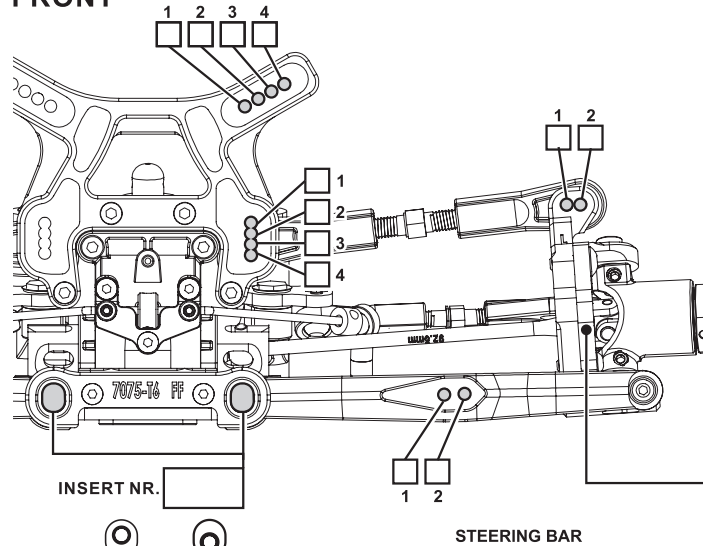


RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °



TOE ANGLE °

☐ PLASTIC ☐ ALUM



FRONT SPINDLE CARRIERS CASTER

☐ 15° ☐ 17.5° ☐ 20°

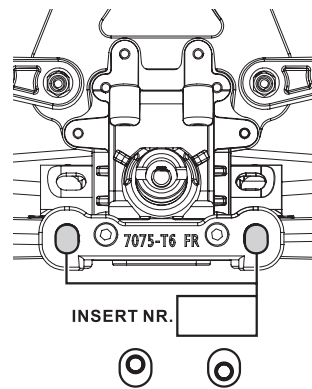

SHOCK

FRONT

LENGTH mm


OIL wt.

PISTON

SPRING



REAR

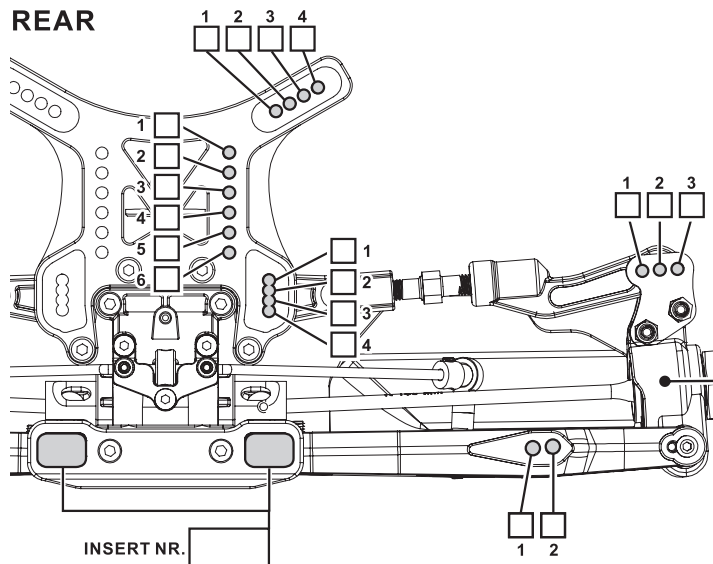


RIDE HEIGHT mm

SWAY BAR mm

CAMBER ANGLE °

☐ PLASTIC ☐ ALUM

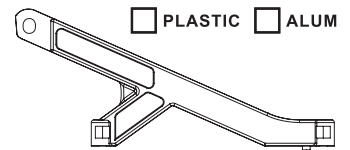

WHEEL HUB

☐ PLASTIC ☐ ALUM

REAR HUB BUSHING



SHOCK


REAR

LENGTH mm

OIL wt.

PISTON

SPRING



WHEELBASE SHIMS

☐ 0mm ☐ 2mm

☐ 2.5mm ☐ 4.5mm

