


Driver _____ Date _____ Track _____ Event _____


Track Condition _____ Temperature _____ Air _____ Track _____

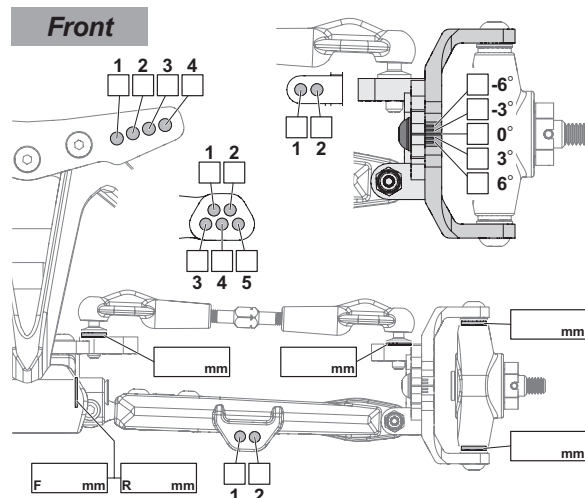

Ride Height _____ mm

Camber Angle _____ °

Toe Angle _____ °



Notes _____

Kick-up		
F/F	F/R	
•	•	22.5°
••	•	21.2°
•••	•	20.0°
•	••	23.8°
••	••	22.5°
•••	••	21.2°
•	•••	25.0°
••	•••	23.8°
•••	•••	22.5°

Shocks

Oil wt. _____


Piston _____ mm

Spring _____

Shock Length _____ mm



Notes _____

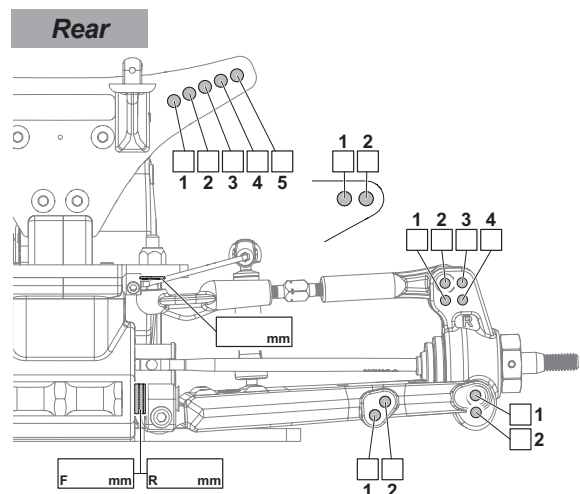

Ride Height _____ mm

Camber Angle _____ °

Toe Angle _____ °

Sway Bar _____

Notes _____

Anti-squat		
R/F	R/R	
•	•	1.5°
••	•	0.5°
•••	•	-0.5°
•	••	3.0°
••	••	1.5°
•••	••	0.5°
•	•••	4.0°
••	•••	3.0°
•••	•••	1.5°

Shocks

Oil wt. _____


Piston _____ mm

Spring _____

Shock Length _____ mm



Notes _____

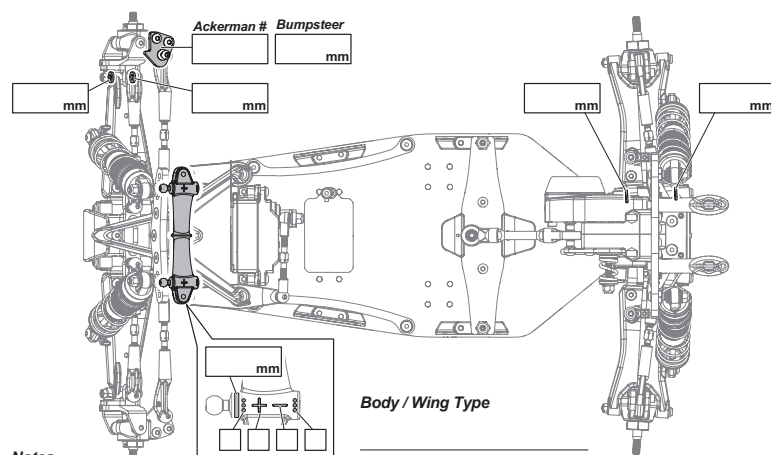

Notes _____

Battery _____

Motor _____

Pinion gear _____ Spur gear _____

Differential

Gear ☐ Oil wt. _____

Ball ☐

Servo

Front ☐ Rear ☐

Wing Height

Low ☐ Mid ☐ High ☐

Tires

	Front	Rear
Tire	_____	_____
Insert	_____	_____

Battery Position

☐ Inline ☐ • ☐ ••

☐ Sideways ☐ •• ☐ •••

Rear Toe-in		
R/F	R/R	Toe-in
0.5mm	1.5mm	1.5°
0.5mm	2.0mm	2.0°
0.5mm	2.5mm	2.5°
0.5mm	3.0mm	3.0°