


Driver _____ Standard Setup _____ Date _____ Track _____ Event _____


Track Condition _____ Temperature _____ Air _____ Track _____

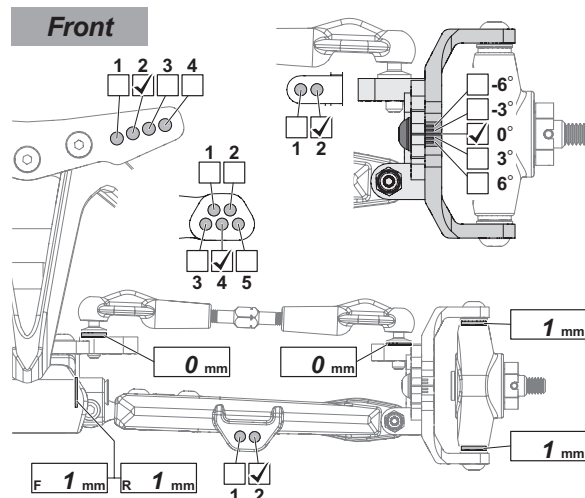

Ride Height 20 mm

Camber Angle 0 °


Toe Angle 1 °



Notes _____

Kick-up			
F/F	F/R		
•	•	22.5°	
••	•	21.2°	
•••	•	20.0°	
•	••	23.8°	
••	••	22.5°	✓
•••	••	21.2°	
•	•••	25.0°	
••	•••	23.8°	
•••	•••	22.5°	

Shocks	
Oil wt.	<u>32.5</u>
Piston	<u>2 Holes 1.6</u> mm
Spring	<u>Green</u>
Shock Length	<u>23</u> mm
Notes	_____

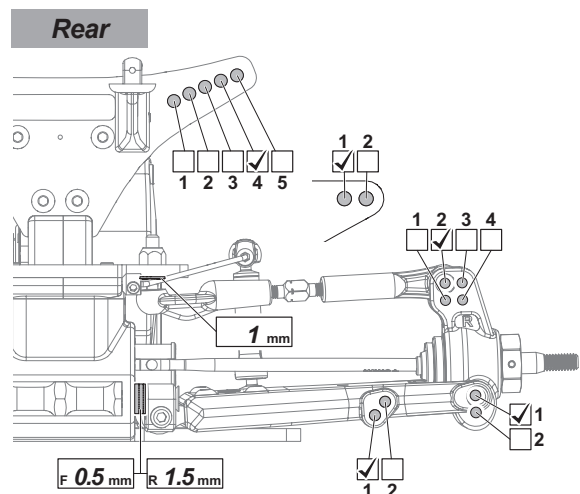

Ride Height 20 mm

Camber Angle 0 °


Toe Angle 3 °

Sway Bar None

Notes _____

Anti-squat			
R/F	R/R		
•	•	1.5°	
••	•	0.5°	
•••	•	-0.5°	
•	••	3.0°	
••	••	1.5°	✓
•••	••	0.5°	
•	•••	4.0°	
••	•••	3.0°	
•••	•••	1.5°	

Shocks	
Oil wt.	<u>30</u>
Piston	<u>2 Holes 1.6</u> mm
Spring	<u>Blue</u>
Shock Length	<u>30</u> mm
Notes	_____

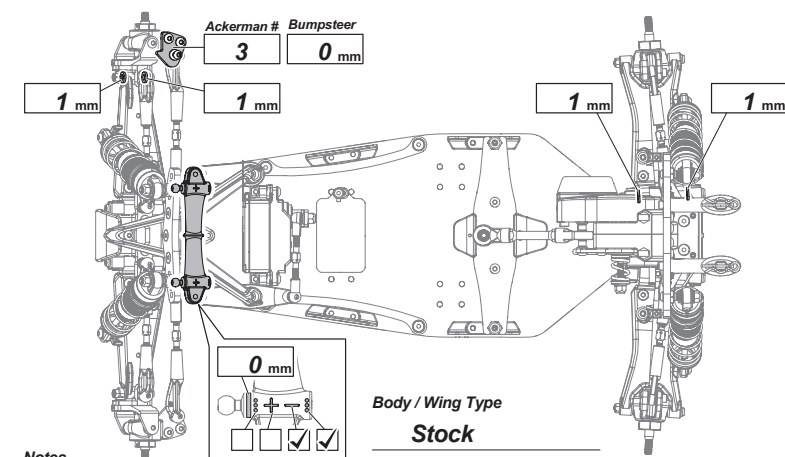

Notes _____

Battery Orion

Motor Orion

Pinion gear 22 / Spur gear Stock

Differential

Gear ☒ Oil wt. 1,000

Ball ☐

Servo

Front ☐ Rear ☒

Wing Height

Low ☐ Mid ☒ High ☐

Tires	
Front	Rear
Tire <u>PL</u>	<u>PL</u>
Insert <u>PL</u>	<u>PL</u>

Battery Position

☐ Inline ☐ • ☐ ••

☒ Sideways ☒ •• ☐ •••

Rear Toe-in			
R/F	R/R	Toe-in	
0.5mm	1.5mm	1.5°	
0.5mm	2.0mm	2.0°	
0.5mm	2.5mm	2.5°	✓
0.5mm	3.0mm	3.0°	