

Inferno MP10 TK12 SETUP SHEET

ver. 1.03 **KYOSHO**
THE FINEST RADIO CONTROL MODELS

Name of Driver		Date	Track	Engine	Plug	Muffler	
Reno Savoya		26/02/2023	DNC indoor 2023 Condition: Loamy bumpy Temp: 5°C	Picco P3TT DLC	OS P3	EFRA 2166	
Spur Gear	Clutch Bell	Clutch Spring	Clutch Shoe	Tire	Tire Insert	Wheel	Body
45 T	<input type="checkbox"/> Std. <input checked="" type="checkbox"/> LW 13 T	<input type="checkbox"/> 0.90 <input type="checkbox"/> 1.00 <input checked="" type="checkbox"/> 0.95 <input type="checkbox"/> 1.10	Carbon 3 X Aluminum X	Tire: AKA Gridiron Compounds: SSLW	AKA	AKA	TK12 light Hot road 16% GT

● Diff. Gear Set-Up

	Front	Center	Rear
Diff. Gear	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD	<input checked="" type="checkbox"/> 10/20 <input type="checkbox"/> 12/18 <input type="checkbox"/> LSD
Ring Gear	<input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12	<input checked="" type="checkbox"/> Small <input type="checkbox"/> Large	<input checked="" type="checkbox"/> 43/13 <input type="checkbox"/> 42/12
	# 7k	# 7k	# 7k

● Shock Set-Up

	Front	Rear
Shock Type	P: w/Diaphragm A: Aeration	
Shock Piston	B: Black W: White T: Taper	
Shock Oil		
Shock Spring		
	Size type 50 - P	Size type 58 - P
	φ 1,2T x 8	φ 1,3W x 8
	# 350	# 600
	IFS001-7515	IFS002-8515

● Ride Height

Front	Rear
25mm	29mm

● Rebound

Front	Rear
106mm	123mm

● Camber Angle

Front	Rear
+ -2°	+ -2°


● Toe Angle

Front	Rear
+ -2°	<input type="checkbox"/> 2.5° <input checked="" type="checkbox"/> 3° <input type="checkbox"/> 3.5°

● Wheelbase


Collar of Rear Hub	Front Side	5 mm
	Rear Side	0 mm

● Shock Mount Position






Sus. Arm	Front	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out
	Rear	<input type="checkbox"/> In <input checked="" type="checkbox"/> Out

● Rear Upper Arm Position



● Rear Wheel Hub

	<input type="checkbox"/> Narrow <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Wide
--	--

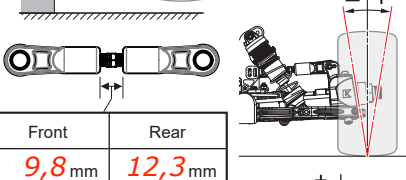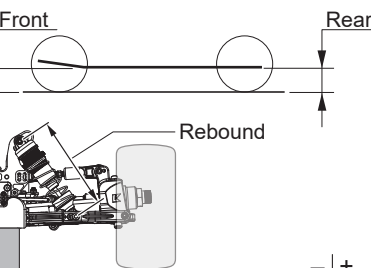

Shock Stay	Front	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Long
		<input type="checkbox"/> Alu <input checked="" type="checkbox"/> Carbon
	Rear	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Long
		<input type="checkbox"/> Alu <input checked="" type="checkbox"/> Carbon

Shock Bush	Front	<input type="checkbox"/> Short <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Long
	Rear	<input type="checkbox"/> Short <input type="checkbox"/> Std. <input checked="" type="checkbox"/> Long

	<input type="checkbox"/> Plastic <input checked="" type="checkbox"/> Aluminum
Hub Carrier Bush	<input checked="" type="checkbox"/> Plastic <input type="checkbox"/> Brass


● Front Sus. Arm

	<input type="checkbox"/> SS <input checked="" type="checkbox"/> Soft (Std.) <input type="checkbox"/> Hard
--	---

● Front Sus. Bush

Rear Side	<input checked="" type="checkbox"/>
-----------	-------------------------------------

● Front Upper Arm Position




● Front Wheel Hub

	<input type="checkbox"/> Narrow <input checked="" type="checkbox"/> Std. <input type="checkbox"/> Wide
--	--

● Front Hub Carrier

	<input type="checkbox"/> Plastic <input checked="" type="checkbox"/> Aluminum
	<input type="checkbox"/> 13° <input checked="" type="checkbox"/> 16° <input type="checkbox"/> 17.5° <input type="checkbox"/> 19° <input type="checkbox"/> 22°

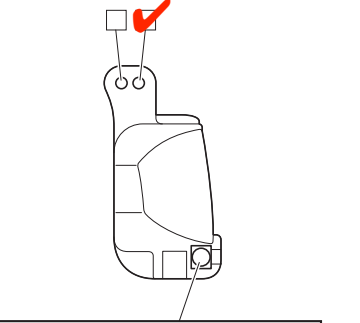

● Lower Bush

	<input checked="" type="checkbox"/> Plastic <input type="checkbox"/> Brass
	-1° <input type="checkbox"/> 0° <input type="checkbox"/> +1° <input checked="" type="checkbox"/>

● Rear Sus. Bush

Front Side	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>
Rear Side	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>


● Rear Sus. Arm

	<input type="checkbox"/> Soft (Std.) <input checked="" type="checkbox"/> Hard
Rear Sus. Bush	
Short	<input type="checkbox"/>
Medium	<input type="checkbox"/>
Long	<input checked="" type="checkbox"/>

● Servo Horn

Steering	Throttle
<input type="checkbox"/> Plastic	<input type="checkbox"/> Plastic
<input type="checkbox"/> AL. Long	<input checked="" type="checkbox"/> AL.
<input checked="" type="checkbox"/> AL. Short	

● Steering Plate



● Sway Bar

Front	Rear
φ 2,2	φ 2,7
0 mm	2 mm

● Weight

Front	Rear
<input type="checkbox"/> None	<input type="checkbox"/> None
<input type="checkbox"/> IFW604-10	<input type="checkbox"/> IFW605-10
<input checked="" type="checkbox"/> IFW604-20	<input checked="" type="checkbox"/> IFW605-20
<input type="checkbox"/> other	<input type="checkbox"/> other
+20g	

● Wing

<input checked="" type="checkbox"/> IF491(TK14)	Flap	<input type="checkbox"/> None
		<input type="checkbox"/> 5mm
		<input type="checkbox"/> 8mm
		<input checked="" type="checkbox"/> Holes

- Am0 - PetiRRC
- OPTIONS:
- titanium screws and turnbuckles
 - IFW426 aluminium AMB Plate
 - IFW626, IFW627 and IFW628 carbon parts
 - IFW613 cva front and rear driveshafts
 - MA081, IFW617 and IFW616 center dogbones
 - IFW631 and IFW632 shock towers
 - FINO-42 RSRC wing riser