

Name DEREK FURUTANI +10mm Date 12/18/11 Track/City West Coast RC Event Ko Propo Champs

Front Suspension

Shock Stay
☒ Standard (UM511)
☐ Big Bore/WC (UM525)

Caster ☐ 30° ☒ 25°

Spacer
☐ None
☒ 0.5mm
☐ 1mm


Type ☒ Standard (UM502)
☐ Narrow/WC (UM567)

Camber ☒ 1.5°
 Toe ☐ In ☒ Out .5°



Ackerman Ball Stud Spacer ☒ 1 mm
☒ Standard (UM129)
☐ WC (LA246)

Axle Height Spacer
☐ Up
☒ Down



Bump Steer Spacer ☐ 0 mm

Axle Type
☐ RB5 (UM506)
☒ WC (UM569)

Axle Spacer
☒ Out 1 mm
☐ In

Wheelbase ☐ Long ☐ Mid ☒ Short
 Front Bulkhead Weight Placement
☐ None (1oz = 28g)
☒ Inside Bulkhead 10 g oz
☒ On Skid Plate 15 g oz

Comments: Cut RT5 chassis to be +10mm longer then stock, Used RT5 battery hold down UMW521 (cut to length)

Rear Suspension

Shock Stay
☒ Standard (UM520)
☐ Short/WC (UM520S)


Lower Suspension Holder
 Stock ☐ RF (RB5) ☐ Aluminum UMW511+UMW512
 Wide ☐ RF2 (RB5SP) ☒ UMW514+UMW515

Suspension Holder Spacer
 F ☒ None ☐ 0.5mm ☐ 1mm
 R ☒ None ☐ 0.5mm ☐ 1mm


Camber ☒ 2°

Hub Type
☐ Stock 0° Type B -4.7mm (UM519)
☐ 0.5°, +4.7mm (LA244-05)
☐ Type B, +4.7mm (UM519-2)

Aluminum
☐ 0° (UMW516-0)
☒ 0.5° (UMW516-05)
☐ 1° (UMW516-1)



Upper Spacer ☐ 1 mm

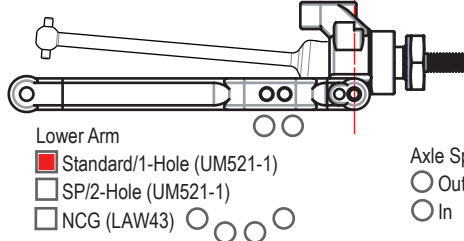

Lower Arm
☒ Standard/1-Hole (UM521-1)
☐ SP/2-Hole (UM521-1)
☐ NCG (LAW43)

Axle Spacer
☐ Out ☐ In mm

Upper Spacer ☐ 2 mm
 Wheelbase ☐ Short ☒ Middle ☐ Long
 Sway Bar ☐ None ☐ mm
 Anti-Squat ☐ °

Comments: Wing mounts spaced out 3mm from tower (adds a little more rear traction)

Shocks

Shock Body Front ☐ Stock (W5194V) ☒ Big Bore (W5303V) Rear ☐ Stock (W5196V) ☒ Big Bore (W5304V)
 Shock Piston ☒ 6 hole ☐ 6 hole
 Shock Oil ☒ Losi 35 ☐ Losi 30
 Shock Spring ☒ Pink ☐ Orange
 Limiters ☐ In ☐ Out mm ☐ In ☐ Out mm
 Length ☐ A ☒ B 19.1 mm ☐ A ☒ B 27.6 mm
 Stock Short (ZX-5) Stock Short (ZX-5)
 Stock BB/WC (W5015) Stock BB/WC (97038) Stock BB/WC (W5015) Stock BB/WC (97038)

Comments:

Other

Tire Gold Barcodes MC Suburbs
 Insert Proline CC Proline CC
 Wheel Kyosho Kyosho

Track Conditions
☒ Smooth ☒ Clay ☐ Blue Groove ☐ Low
☐ Bumpy ☐ Grass ☐ Astroturf ☐ Med
☐ Loamy ☒ Wet ☐ Soft Dirt ☒ High
☐ Sandy ☐ Dry ☐ Other

Electronics
 Battery 4600 Peak Spur 78
 ESC SXX V2 Motor Peak 7.5 Pinion 22
 Traction Compound none

Comments: Used velvet coated pinion gear W0122V