

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm

4.8mm Ball Stud: ☐ UM128 (Std) ☐ UMW508 (+2mm High Mount)

Camber: _____ °

4.8mm Ball Stud Spacer: _____ mm

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Wheel Hub: _____ mm

Ackerman Steer Spacer: _____ mm

Bump Steer Spacer: _____ mm

Toe: ☐ In ☐ Out _____ °

Tie Rod: _____

Front Bulkhead Weight Placement: ☐ None ☐ Bulkhead Inside _____ oz _____ g ☐ On the skid plate _____ oz _____ g

Caster: ☐ 25° ☐ 30° ☐ 0.5 ☐ 1.0 ☐ None ☐ 0° ☐ 2° ☐ 4°

Caster Block position: ☐ IN (wide/Std) ☐ OUT (Narrow)

Axle Height Spacer: ☐ _____ mm ☐ _____ mm

Comments: _____

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension

Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____ °

4.8mm Ball Stud: ☐ UM129 ☐ UMW508 (+2mm High Mount) ☐ 97050M ☐ UM128 (Std)

Sway Bar: ☐ None ☐ _____ mm

Camber: _____ °

Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

RR: _____

Mid: _____

Lower Sus Holder: Normal ☐ RF ☐ RF2 Aluminum (Opt) ☐ UMW511+UMW512 ☐ UMW514+UMW515

Arm: ☐ UM713 ☐ UM521 ☐ UM566 ☐ UM521-1 ☐ UM503

Universal Swing Shaft: _____

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Rear Hub Toe: ☐ 0° Type-B (UM519) ☐ 0° Type-B2 (UM519-2) ☐ 0° Alu (UMW516-0) ☐ 0.5° Alu (UMW516-05) ☐ 1° Alu (UMW516-1)

Comments: _____

Shock

Shock Piston: _____

Shock Oil: # _____

Shock Spring: _____


Limiters: in _____ mm out _____ mm

Shock Length(A): _____ mm

Shock Length(B): _____ mm

O-ring: _____

Ball End type Front: S ☐ M ☐ L ☐ Rear: S ☐ M ☐ L ☐



Battery Placement:


☐ None ☒ Screw

Comment: _____

Front _____ Rear _____

Foam: ☐ Front ☐ Rear ☐ None

Chassis

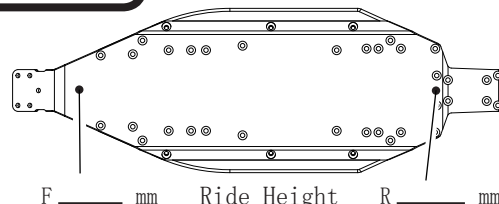

Tire

Tire _____ Compound _____ Insert _____ Wheel _____

Front: _____

Rear: _____

Comment: _____

Comment

Track Condition

☐ Smooth ☐ Sandy ☐ Bumpy ☐ Soft Dirt ☐ Low Traction ☐ Grass ☐ Med. Traction ☐ BlueGroove ☐ High Traction ☐ Clay ☐ Wet ☐ Dusty ☐ Dry _____

Wing

Wing Mount: ☐ Narrow ☐ Wide

Wing Angle: ☐ 4° ☐ 7° ☐ 10°

Lip: _____

Battery Type

☐ Straight ☐ Separate ☐ Short

Type: _____

Other

Motor: _____

ESC: _____

Pinion/Spur: _____