

Name _____ Date _____ Track / City _____ Event _____

Front Suspension



Upper Spacer: _____ mm

Front Tower:
☐ Std
☐ JT Tower

Toe: ☐ In ☐ Out _____°

Tie Rod: _____

Front Bulkhead Weight Placement: * 1oz=28g
☐ None
☐ Bulkhead Inside _____ oz _____ g
☐ On the skid plate _____ oz _____ g

4.8mm Ball Stud:
☐ UM128 (Std.)
☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Caster:
☐ 25°
☐ 30°

Spacer:
☐ 0.5
☐ 1.0
☐ None

Caster Block:
☐ 0°
☐ 2°
☐ 4°

Caster Block Position:
☐ IN (wide/Std)
☐ OUT (Narrow)

AL. Steering Support:
☐ None
☐ UMW724

4.8mm Ball Stud:
☐ LA246 (-1mm Low Mount)
☐ 97050M (Std)

Ackerman Steer Spacer: _____ mm
☐ UMW701 Aluminum ST Plate
☐ UMW702 Aluminum Clank Arm


Bump Steer Spacer: _____ mm

Axle Height Spacer:
☐ _____ mm
☐ _____ mm

Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension



RR: _____

Mid: _____

Sus Holder Spacer:
F ☐ 0.5 ☐ 1.0 ☐ None
R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____°

4.8mm Ball Stud:
☐ UM129
☐ UMW508 (+2mm High Mount)
☐ 97050M
☐ UM128 (Std.)

Upper Spacer: _____ mm

Lower Sus. Holder:
Normal ☐ RF ☐ Wide ☐ RF2
Option ☐ UMW511GM (RF/Alu)

Universal Swing Shaft:
☐ UMW705(RF/Alu) _____ Block
☐ UMW725(RF-MID/Bra) _____ Block
(Opt/Adjustable)
☐ UMW706(RR-RWD) _____ Block
☐ UMW707(RR-MID) _____ Block

Upper Spacer: _____ mm

Wheelbase:
F: _____ mm
R: _____ mm

Wheelbase:
F: _____ mm
R: _____ mm

Sway Bar: ☐ None ☐ _____ mm

Drive Hub :
☐ 4mm (TFW113)
☐ 4.5mm (LAW30GM/Std.)
☐ 5.2mm (UMW523)


Axle Spacer:
☐ Out _____ mm
☐ In _____ mm

Rear Hub Carrier :
☐ 0°Type-B (UM519)
☐ 0°Type-B2 (UM519-2)
☐ 0° Alu (UMW704-0)
☐ 0.5°Alu (UMW704-05)
☐ 1°Alu (UMW704-1)

Comments: _____

Shock

	Front	Rear
Piston:	_____	_____
Oil:	# _____	# _____
Spring:	_____	_____
Limiters:	in _____ out _____ mm _____ mm	in _____ out _____ mm _____ mm
Length(A):	_____ mm	_____ mm
O-ring:	_____	_____
Shock Top type:	☐ Alu(UM719/Std) ☐ UM753-1	
Ball End type:	Front: ☐ S ☐ M ☐ L Rear: ☐ S ☐ M ☐ L	



Battery Placement:

☐ UM787 ☐ None ☒ Screw


Comment: _____

Front _____ Rear _____

Foam:
☐ Front
☐ Rear
☐ None

Chassis

☐ Kit ☐ UMW720 (LW)

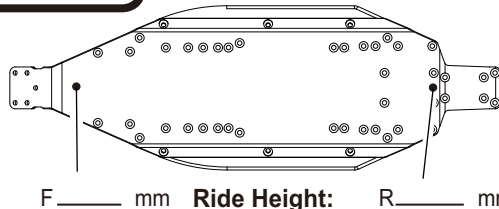

F _____ mm Ride Height: _____ mm

Battery Type

☐ Straight
☐ Separate
☐ Short
☐ Sideways

Type: _____

Other

Motor: _____

ESC: _____

Pinion/Spur: _____

Track Condition

☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Truction ☐ Grass
☐ Med. Truction ☐ Blue Groove
☐ Higt Truction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☐ Astroturf
☐ _____

Wing

Wing Mount :
☐ Blast-S ☐ Narrow
☐ Blast-L ☐ Wide
☐ Step-S
☐ Step-M
☐ Step-L
☐ Step 2.0
☐ Step 3.0
☐ Straight
☐ Round

Wing Angle :
☐ 4°
☐ 7°
☐ 10°

Lip : _____

Tire

	Front	Rear	Traction Compound or comment:
Tire:	_____	_____	_____
Inserts:	_____	_____	_____
Wheel:	_____	_____	_____

Comment
