

Name _____ Date _____ Track / City _____ Event _____

Front Suspension



Upper Spacer: _____ mm

Toe: ☐ In ☐ Out _____°

Tie Rod: _____

Front Bulkhead Weight Placement:

☐ None

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g

4.8mm Ball Stud: ☐ UM128 (Std) ☐ UMW508 (+2mm High Mount)

Camber: _____°

4.8mm Ball Stud Spacer: _____ mm

Caster: ☐ 25° ☐ 30° ☐ 0.5 ☐ 1.0 ☐ None ☐ 0° ☐ 2° ☐ 4°

Caster Block position: ☐ IN (wide/Std) ☐ OUT (Narrow)

Front Axle: ☐ UM569 (RB6) ☐ UM506 (RB5)

Comments: _____

4.8mm Ball Stud: ☐ LA246 (-1mm Low Mount) ☐ 97050M (Std)

Ackerman Steer Spacer: _____ mm


Bump Steer Spacer: _____ mm

Wheel Hub: _____ mm

Axle Height Spacer: ☐ _____ mm ☐ _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension



RR: 

Mid: 

Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None


Anti-Squat: _____°

4.8mm Ball Stud: ☐ UM129 ☐ UMW508 (+2mm High Mount) ☐ 97050M ☐ UM128 (Std)

Upper Spacer: _____ mm

Lower Sus Holder: Normal ☐ RF ☐ UMW511+UMW512 ☐ RM ☐ UMW705+UMW706: _____ Wide ☐ RF2 ☐ UMW514+UMW515 ☐ MM ☐ UMW705+UMW707: _____

Sway Bar: ☐ None ☐ _____ mm

Universal Swing Shaft: 

Camber: _____°

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Arm: ☐ UM713 ☐ UM521 ☐ UM566 ☐ UM521-1 ☐ UM503

Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Hub Toe: ☐ 0° ☐ 0.5° ☐ 1° ☐ UM519 ☐ UM519-2 ☐ Alu (UMW516) ☐ Alu (UMW704)

Comments: _____

Motor Position


☐ Rear Motor ☐ Midship Motor

Diff.

☐ Gear Diff. # _____ ☐ Ball Diff.

Shock

	Front			Rear		
Shock Piston:	_____			_____		
Shock Oil:	# _____			# _____		
Shock Spring:	_____			_____		
Limiters:	in _____	out _____	mm _____	in _____	out _____	mm _____
Shock Length(A):	_____ mm			_____ mm		
Shock Length(B):	_____ mm			_____ mm		
O-ring:	_____			_____		
Ball End type:	Front: S ☐ M ☐ L ☐			Rear: S ☐ M ☐ L ☐		



Battery Placement:


Comment: _____

Front  Rear 

Foam: ☐ Front ☐ Rear ☐ None

Chassis

☐ Kit ☐ UMW720

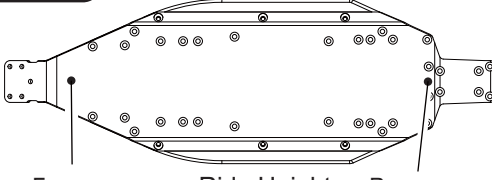

F: _____ mm Ride Height R: _____ mm

Battery Type

☐ Straight ☐ Separate ☐ Short

Type: _____

Other

Motor: _____

ESC: _____

Pinion/Spur: _____

Tire

	Tire	Compound	Insert	Wheel
Front:	_____	_____	_____	_____
Rear:	_____	_____	_____	_____
Comment:	_____			

Comment

Track Condition

☐ Smooth ☐ Sandy ☐ Bumpy ☐ Soft Dirt ☐ Low Traction ☐ Grass ☐ Med. Traction ☐ Blue Groove ☐ High Traction ☐ Clay ☐ Wet ☐ Dusty ☐ Dry _____

Wing

☐ Blast-S ☐ Blast-L ☐ Step-S ☐ Step-M ☐ Step-L ☐ Step 2.0 ☐ _____

Wing Mount :

☐ Narrow ☐ Wide

Wing Angle : ☐ 4° ☐ 7° ☐ 10°

Lip : _____