


Name \_\_\_\_\_ Date \_\_\_\_\_ Track / City \_\_\_\_\_ Event \_\_\_\_\_

### Front Suspension

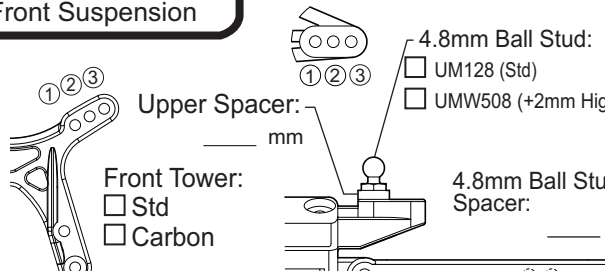

Upper Spacer: \_\_\_\_\_ mm

Front Tower:  Std  Carbon

Toe:  In  Out \_\_\_\_\_°

Tie Rod: \_\_\_\_\_

Front Bulkhead Weight Placement:  None  Bulkhead Inside \_\_\_\_\_ oz \_\_\_\_\_ g  On the skid plate \_\_\_\_\_ oz \_\_\_\_\_ g

4.8mm Ball Stud:  UM128 (Std)  UMW508 (+2mm High Mount)

Camber: \_\_\_\_\_°

4.8mm Ball Stud Spacer: \_\_\_\_\_ mm

Axle Spacer:  Out \_\_\_\_\_ mm  In \_\_\_\_\_ mm

Wheel Hub: \_\_\_\_\_ mm

Caster Block position: \_\_\_\_\_

Caster:  25°  30°  0.5  1.0  None  0°  2°  4°

Spacer:  IN (wide/Std)  OUT (Narrow)

Caster Block:  IN (wide/Std)  OUT (Narrow)

Front Axle:  UM569 (RB6)  UM506 (RB5)

Front Arm:  Std  Carbon

4.8mm Ball Stud:  Forward (Std)  Reverse

LA246 (-1mm Low Mount)  97050M (Std)

Ackerman Steer Spacer: \_\_\_\_\_ mm

C-Hub:  Std  Carbon

Knuckle:  Std  Carbon


Bump Steer Spacer: \_\_\_\_\_ mm

Axle Height Spacer:  \_\_\_\_\_ mm  \_\_\_\_\_ mm

Wheelbase: F: \_\_\_\_\_ mm R: \_\_\_\_\_ mm

Comments: \_\_\_\_\_

### Rear Suspension

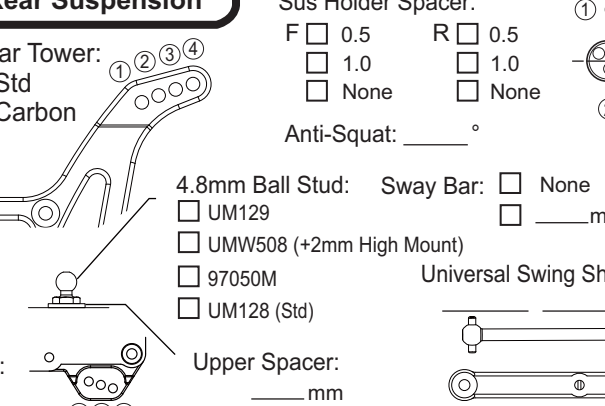

Rear Tower:  Std  Carbon

RR:  Std  Carbon

Mid:  Std  Carbon

Sus Holder Spacer: F  0.5  1.0  None R  0.5  1.0  None

Anti-Squat: \_\_\_\_\_°

4.8mm Ball Stud:  UM129  UMW508 (+2mm High Mount)  97050M  UM128 (Std)

Sway Bar:  None  \_\_\_\_\_ mm

Universal Swing Shaft: \_\_\_\_\_

Camber: \_\_\_\_\_°

Axle Spacer:  Out \_\_\_\_\_ mm  In \_\_\_\_\_ mm

Upper Spacer: \_\_\_\_\_ mm

Hub Spacing: F: \_\_\_\_\_ mm R: \_\_\_\_\_ mm

Outer Bearing:  5x10  5x11  5x13

Wheelbase (arm): F: \_\_\_\_\_ mm R: \_\_\_\_\_ mm

Rear Arm:  UM713  UM521/566  UM521-1  UM503 (Short)  UM711 (Carbon)

Rear Hub Toe:  UM519  UM519-2  0° Alu (UMW704-0)  0.5° Alu (UMW704-05)  1° Alu (UMW704-1)

Normal Aluminum(Opt)  RF  UMW511+UMW512  RM UMW705+UMW706: \_\_\_\_\_  RF2  UMW514+UMW515  MM UMW705+UMW707: \_\_\_\_\_

Comments: \_\_\_\_\_

### Motor Position

Rear Motor  Midship Motor

### Diff.

Gear Diff. # \_\_\_\_\_  Ball Diff.

### Shock

Front Rear

Shock Piston: \_\_\_\_\_

Shock Oil: # \_\_\_\_\_ # \_\_\_\_\_

Shock Spring: \_\_\_\_\_

Limiters: in \_\_\_\_\_ mm out \_\_\_\_\_ mm


Shock Length(A): \_\_\_\_\_ mm

Shock Length(B): \_\_\_\_\_ mm

O-ring: \_\_\_\_\_

Ball End type: Front:  S  M  L Rear:  S  M  L

Shock Cap:  UM719 (Std)  UM753-1 (Bleeder)



### Battery Placement:

UM787  None  Screw


Comment: \_\_\_\_\_

Front Rear

Foam:  Front  Rear  None

### Chassis

Kit  UMW720 (LW)

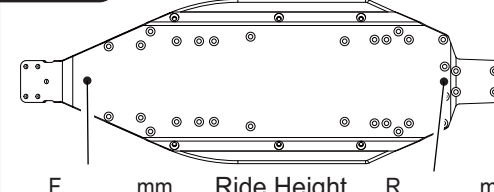

F \_\_\_\_\_ mm Ride Height R \_\_\_\_\_ mm

### Battery Type

Straight  Separate  Short

Type: \_\_\_\_\_

### Other

Motor: \_\_\_\_\_

ESC: \_\_\_\_\_

Pinion/Spur: \_\_\_\_\_

### Tire

Tire \_\_\_\_\_ Compound \_\_\_\_\_ Insert \_\_\_\_\_ Wheel \_\_\_\_\_

Front: \_\_\_\_\_

Rear: \_\_\_\_\_

Comment: \_\_\_\_\_

### Comments

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

### Track Condition

Smooth  Bumpy  Low Traction  Med. Traction  High Traction  Wet  Dry

Sandy  Soft Dirt  Grass  BlueGroove  Clay  Dusty

### Aero

Body: \_\_\_\_\_

Wing Mount:  Narrow  Wide

Wing Angle:  4°  7°  10°

Lip: \_\_\_\_\_

Blast-S  Blast-L  Step-S  Step-M  Step-L  Step 2.0