


Name _____	Date _____	Track / City _____	Event _____
------------	------------	--------------------	-------------

Front Suspension



Upper Spacer: _____ mm

4.8mm Ball Stud: Camber: _____ °

UM128 (Std) UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Toe: In Out _____ °

Tie Rod: _____


Front Bulkhead Weight Placement:

None *1oz=28g A (UM502) B (UM721/Std) C (UM567)

Bulkhead Inside _____ oz _____ g

On the skid plate _____ oz _____ g

Comments: _____

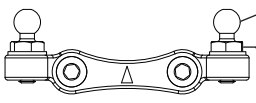

Axle Spacer: _____ mm

Out _____ mm

In _____ mm

Wheel Hub: _____ mm

Caster Block position: _____

IN (wide/Std) OUT (Narrow)

4.8mm Ball Stud: LA246 (-1mm Low Mount) 97050M (Std)

Ackerman Steer Spacer: _____ mm


Bump Steer Spacer: _____ mm

Axle Height Spacer: _____ mm

_____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Suspension

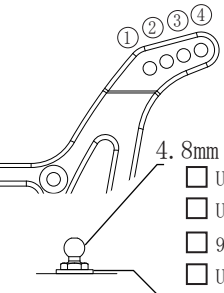

RR: _____

Mid: _____

Sus Holder Spacer:

F 0.5 R 0.5

1.0 1.0

None None

Anti-Squat: _____ °

4.8mm Ball Stud: Sway Bar: None _____ mm

UM129 UMW508 (+2mm High Mount)

97050M UM128 (Std)

Upper Spacer: _____ mm

Lower Sus Holder:

Normal Aluminum (Opt)

Narrow RF UMW511+UMW512

Wide RF2 UMW514+UMW515

Arm: UM713 UM521

UM566 UM521-1

UM503

Universal Swing Shaft: _____


Camber: _____ °

Axle Spacer: _____ mm

Out _____ mm

In _____ mm

Comments: _____



Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Rear Hub Toe:

0° Type-B (UM519)

0° Type-B2 (UM519-2)

0° Alu (UMW516-0)

0.5° Alu (UMW516-05)

1° Alu (UMW516-1)

Motor Position

Rear Motor

Midship Motor


Diff.

Gear Diff. # _____

Ball Diff.

Shock

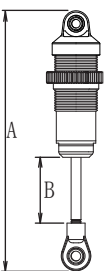

	Front		Rear	
Shock Piston:	_____	_____	_____	_____
Shock Oil:	# _____	# _____	# _____	# _____
Shock Spring:	_____	_____	_____	_____
Limiters:	in _____ mm	out _____ mm	in _____ mm	out _____ mm
Shock Length(A):	_____ mm	_____ mm	_____ mm	_____ mm
Shock Length(B):	_____ mm	_____ mm	_____ mm	_____ mm
O-ring:	_____	_____	_____	_____
Ball End type Front:	S <input type="checkbox"/> M <input type="checkbox"/> L <input type="checkbox"/>		S <input type="checkbox"/> M <input type="checkbox"/> L <input type="checkbox"/>	
Rear:	S <input type="checkbox"/> M <input type="checkbox"/> L <input type="checkbox"/>		S <input type="checkbox"/> M <input type="checkbox"/> L <input type="checkbox"/>	



Battery Placement


None Screw

Comment: _____

Foam: Front Rear None

Chassis

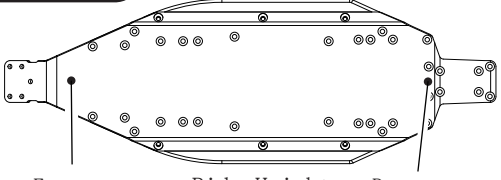

F _____ mm Ride Height _____ mm R _____ mm

Battery Type

Straight

Separate

Short

Type: _____

Other

Motor: _____

ESC: _____

Pinion/Spur: _____

Track Condition

<input type="checkbox"/> Smooth	<input type="checkbox"/> Sandy
<input type="checkbox"/> Bumpy	<input type="checkbox"/> Soft Dirt
<input type="checkbox"/> Low Traction	<input type="checkbox"/> Grass
<input type="checkbox"/> Med. Traction	<input type="checkbox"/> BlueGroove
<input type="checkbox"/> High Traction	<input type="checkbox"/> Clay
<input type="checkbox"/> Wet	<input type="checkbox"/> Dusty
<input type="checkbox"/> Dry	<input type="checkbox"/> _____

Wing

Blast-S Blast-L

Step-S Step-M

Step-L Step 2.0

Wing Mount

Narrow

Wide

Wing Angle

4°

7°

10°

Lip: _____

Tire	Tire	Compound	Insert	Wheel
Front: _____	_____	_____	_____	_____
Rear: _____	_____	_____	_____	_____
Comment: _____	_____	_____	_____	_____
Comment: _____	_____	_____	_____	_____