

Name _____ Date _____ Track / City _____ Event _____

Front Suspension

Upper Spacer: _____ mm

Shock Tower: _____

Toe: ☐ In ☐ Out _____°

Toe Rod: _____

Front Bulkhead Weight Placement:

☐ None

☐ Bulkhead Inside _____ oz _____ g

☐ On the skid plate _____ oz _____ g (*1oz = 28g)

4.8mm Ball Stud:

☐ UM128 (Std)

☐ UMW508 (+2mm High Mount)

4.8mm Ball Stud Spacer: _____ mm

Caster:

☐ 25° ☐ 30°

Spacer:

☐ A (UM502) ☐ B (UMW722/Brass) ☐ B (UMW723/Alu)

☐ B (UM721/Std) ☐ C (UM567)

Caster Block:

☐ 0.5 ☐ 0° ☐ 1.0 ☐ 2° ☐ None ☐ 4°

AI Steering Support:

☐ None ☐ UMW724

Axel Spacer:

☐ Out _____ mm ☐ In _____ mm

Wheel Hub:

☐ UM569/Std ☐ UM506

Caster Block Position:

☐ In (Wide/Std) ☐ Out (Narrow)

4.8mm Ball Stud:

☐ LA246 (-1mm Low Mount) ☐ 97050M (STD)

Ackermann Steer Spacer: _____ mm

☐ UMW701 Aluminum ST Plate ☐ UMW702 Aluminum Crank Arm

Bump Steer Spacer: _____ mm

Axel Height Spacer:

☐ _____ mm ☐ _____ mm

Wheelbase: F _____ mm R _____ mm

Comments: _____

Rear Suspension

Shock Position:

☐ Front ☐ Rear

Shock Tower: _____

RR: _____

Mid: _____

Susp Holder Spacer:

F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____°

4.8mm Ball Stud:

☐ UM129 ☐ UMW508 (+2mm High Mount) ☐ 97050M ☐ UM128 (Std)

Upper Spacer: _____ mm

Lower Susp Holder:

Plastic ☐ RF ☐ RF2L ☐ RF2

Option ☐ UMW511GM (RF/Alu)

(Opt/Adjustable)

☐ UMW705 (RF/Alu) _____ Block

☐ UMW725 (RF-MID/Bra) _____ Block

(Opt/Adjustable)

☐ UMW706 (RR-RWD) _____ Block

☐ UMW707 (RR-MID) _____ Block

Upper Spacer: _____ mm

Rear Hub Carrier:

☐ 0° Type-B (UM519) ☐ 0° Type-B2 (UM519-2) ☐ 0° Alu (UMW704-0) ☐ 0.5° Alu (UMW704-05) ☐ 1° Alu (UMW704-1)

Drive Hub:

☐ 4mm (TFW113) ☐ 4.5mm (LAW30GM/Std.) ☐ 5.2mm (UMW523)

Axle Spacer:

☐ Out _____ mm ☐ In _____ mm

Sway Bar: ☐ None ☐ _____ mm

Wheelbase: F _____ mm R _____ mm

Wheelbase: F _____ mm R _____ mm

Comments: _____

Differential

☐ Gear: _____

☐ Ball: _____

Shocks

Front Rear

Piston: _____

Oil: # _____ # _____

Spring: _____

Limiters: In _____ mm In _____ mm

Out _____ mm Out _____ mm


Length (A): _____ mm _____ mm

O-Ring: _____

Shock Top Type: ☐ Alu (UM719/Std) ☐ UM753-1


Ball End Type: Front ☐ S ☐ M ☐ L

Rear ☐ S ☐ M ☐ L




Am0 - V4.1

Battery placement



Chassis

☐ Stock ☐ UM731

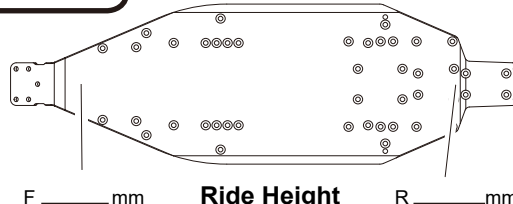

Transmission

☐ Rear Motor

☐ Mid-Ship 3 Gear

☐ Mid-Ship 4 Gear

☐ Mid-Ship Laydown

Battery Type

☐ Straight

☐ Separate

☐ Short

Type

Track Condition

☐ Smooth ☐ Sandy

☐ Bumpy ☐ Soft Dirt

☐ Low Traction ☐ Grass

☐ Med. Traction ☐ Blue Groove

☐ High Traction ☐ Clay

☐ Wet ☐ Dusty

☐ Dry _____

Wing

Wing Mount:

☐ Blast-S ☐ Narrow

☐ Blast-L ☐ Wide

Wing Angle:

☐ 4° ☐ 7° ☐ 10°

☐ Step-S ☐ Step-M

☐ Step-L ☐ Step 2.0

☐ Step 3.0

☐ Straight Lip: _____

☐ Round _____

Tire

Front Rear

Tire _____

Insert _____

Wheel _____

Other

Motor: _____

ESC: _____

Ratio: _____