

Name _____ Date _____ Truck / City _____ Event _____

Front Suspension:

Toe: ☐ In ☐ Out _____°

Sus Mount: ☐ UM502 ☐ UM567 ☐ UM721

Upper Spacer: _____ mm

4.8mm Ball Stud: ☐ UM128 ☐ UMW508 (+2mm High Mount)

Shock Mount: ☐ IN ☐ OUT

Caster: ☐ 25° ☐ 30°

Spacer: ☐ 0.5 ☐ 1.0 ☐ None

Axle Spacer: ☐ Out _____ mm

Caster Block: ☐ IN (wide/Std) ☐ OUT (Narrow)

4.8mm Ball Stud: ☐ LA246 (-1mm Low Mount) ☐ 97050M

Ackerman Steer Spacer: _____ mm

Bump Steer Spacer: _____ mm

Axle Height Spacer: ☐ Up ☐ Down

Wheelbase: ☐ Long ☐ Middle ☐ Short

Comments: _____

Rear Suspension:

Sus Holder Spacer: F ☐ 0.5 ☐ 1.0 ☐ None R ☐ 0.5 ☐ 1.0 ☐ None

Anti-Squat: _____°

Sway Bar: ☐ None ☐ _____mm

Upper Spacer: _____ mm

Wheelbase: F: _____ mm R: _____ mm

Camber: _____°

Axle Spacer: ☐ Out _____ mm ☐ In _____ mm

Lower Sus Holder: Normal ☐ RF ☐ RF2 Aluminum(Opt) Front _____ Rear _____

Rear Hub: ☐ 0° Type-B (UM519) ☐ 0° Type-B2 (UM519-2) ☐ 0° Alu (UMW704-0) ☐ 0.5° Alu (UMW704-05) ☐ 1° Alu (UMW704-1)

Upper Spacer: _____ mm

Comments: _____

Drive:


☐ Rear Motor ☐ Midship Motor

Diff:

☐ Gear Diff # _____ ☐ Ball Diff

Shock:

	Front		Rear	
Shock Piston:	_____		_____	
Shock Oil:	# _____	# _____		
Shock Spring:	_____		_____	
Limiters:	in _____ out _____ mm _____	in _____ out _____ mm _____		
Shock Length(A):	_____ mm		_____ mm	
Shock Top Type:	☐ Normal	☐ Alu(UM719)		
5.8mm Ball End:	Front: ☐ S ☐ M ☐ L	Rear: ☐ S ☐ M ☐ L		




Chassis:

Battery Placement: _____



☐ No Screw ☒ Screw

Weight Placement

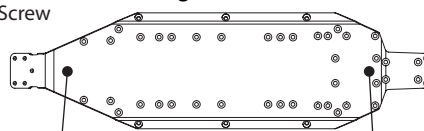

F _____ mm Ride Height: R _____ mm

Tire:

Tire: _____ Front _____ Rear _____

Inserts: _____

Wheel: _____

Traction Compound: _____

Comment: _____

Track Conditions:

Composition: _____

Surface: _____

Traction: _____

Comments: _____

Electronics:

Motor: _____

Pinion/Spur: _____

Battery: _____

ESC: _____

Radio: _____

Servo: _____

Throttle/Brake: _____

EPA: _____ Expo: _____

Initial brake: _____

Drag brake: _____

Throttle profile: _____

Steering expo: _____

Steering speed: _____

Body:

Material:

Screw: ☐ Steel ☐ Titanium

Servo Horn: ☐ Normal ☐ Rigid(UM717)

Pinion Gear: ☐ Steel ☐ Aluminium

Shock Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear