


LAZER ZX6.6 SET UP SHEET

KYOSHO
THE FINEST RADIO CONTROL MODELS

Name Kohta Akimoto Date 16/10/10 Truck / City Yatabe Arena(Astro turf) Event For 2016 Japan nationals

Front Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☒ Carbon (LAW58)
☐ Other

Lower Sus Holder Block:

Front A Rear In B

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments:

Upper Arm Position:



4.8mm Ball Stud:

- ☒ 97050M(Std)
☐ UM129

Upper Spacer:

0 mm

Camber

2 °

Spacer:

2 mm

Shock Position:

Wheelbase: Front 0 mm
Rear 1 mm

Bump Steer Spacer:

1 mm

Toe:

- ☐ In
☒ Out 1 °

Sway Bar:

- ☐ None
☒ 2.0 mm

Ackerman Spacer:


0 mm

Front Diff:

- ☒ Gear Diff. # 10,000
☐ Ball Diff.

Rear Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☒ Carbon (LAW59)
☐ Other

Wing Stay Position:

Lower Sus Holder Block:


Front In B Rear Out C

Lower Sus Holder Spacer:

Front 0.5 mm Rear 0.5 mm

Comments:

Upper Arm Position:



4.8mm Ball Stud:

- ☒ 97050M(Std)
☐ UM129

Upper Spacer:

1 mm

Stiffener:

- ☐ Std.
☒ Carbon Comp. (LAW53)

Toe In:

1.5 °

Sus. Arm:

- ☐ LA272(Std)
☒ UM713B

Camber

2.5 °

Hub Carrier:

- ☐ Type-B (UM519)
☐ Type-B2 (UM519-2)
☒ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)


Upper Spacer:

2 mm

Wheelbase:

Front 2 mm
Rear 0 mm

Shock Position:



Wheelbase:

Front: 1 mm
Rear: 3 mm

Center Drive :

- ☒ Diff. Gear ☐ Slipper Clutch
1,000,000 ☐ Separates
Coming soon ☐ Direct

Shock:

Shock Piston:

Front 2x1.6

Rear 2x1.6

Shock Oil:

550

550

Shock Spring:

Gold

Gold

Limiters:

in 0 mm

in 0 mm

Shock Length (A):

19.5 mm

28.5 mm


Shock Top Type:

- ☐ Alu. (UM719/Std) ☐ UM753-1


5.8mm Ball End:

Front: ☐ S ☐ M ☒ L

Rear: ☐ S ☒ M ☐ L



Chassis:

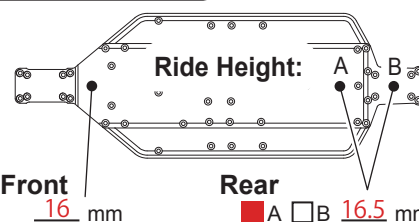

Front 16 mm

Rear ☒ A ☐ B 16.5 mm

Tire:

Tire:

Front YAU-6810

Rear YAU-6558

Compound:

YAU-6733

YAU-6734

Wheel:

Std

Std

Note:

Comment :

LAW50 Gear Diff Set
LAW57 Stabilizer Set
LAB06LW Blade Body (LAZER ZX6/0.6t)

Electronics:

- Battery: ☐ Saddle Pack
☒ Short

Motor Position: ☐ Front

☒ Rear

Servo Mounting: ☐ Straight

☐ Sideways

☒ Aluminum (LAW56)

Motor Mount Position:

- ☐ Std ☒ 8mm Front

Battery Position:

- ☐ Std ☒ 8mm Front

Motor: ORION VST2LW 5.5T

Pinion / Spur: 19/78

ESC: ORION R10.1

Body / Wing:

Body:

BLADE LW

Wing Mount:

- ☐ Narrow ☒ Wide

Wing Dum Height:

20 mm

Wing:

Step 3.0 Round

Wing Angle:

- ☒ 4° ☐ 7° ☐ 10°

Lip Height:

0 mm

Material:

- Screw: ☐ Steel ☒ Titanium

Pinion Gear:

- ☐ Steel ☒ Aluminum

Shock O-Ring:

- ☐ O-ring ☒ X-ring ☐ Red ☒ Clear

Truck Condition

- ☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Truction ☐ Grass
☐ Med. Truction ☐ Blue Groore
☐ Higt Truction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☒ Astro turf