


Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☐ Carbon (LAW58)
☐ Other _____

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129

Upper Spacer:

_____ mm

Camber

_____ °

Spacer:

_____ mm


Axle-Height Spacer:

- ☐ Up
☐ Down

Caster Block:

- ☐ 7°
☐ 10°

Bump Steer Spacer:



_____ mm

Toe:

- ☐ In
☐ Out _____ °

Sway Bar:

- ☐ None
☐ _____ mm

Ackerman Spacer:



_____ mm

Shock Position:



Wheelbase: Front

_____ mm

Rear _____ mm

Stiffener:


- ☐ Std.
☐ Carbon Comp. (LAW52)

Front Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Rear Suspension:

Shock Position:



Shock Stay:

- ☐ Std.
☐ Carbon (LAW59)
☐ Other _____

Wing Stay Position:

Lower Sus Holder Block:



Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129

Upper Spacer:

_____ mm

Stiffener:

- ☐ Std.
☐ Carbon Comp. (LAW53)

Toe In: _____ °


Sus. Arm:

- ☐ LA272(Std)
☐ UM713B

Camber

_____ °

Hub Carrier:



- Type-B (UM519)
Type-B2 (UM519-2)

Upper Spacer:


_____ mm

Wheelbase:

Front _____ mm

Rear _____ mm

Shock Position:



Wheelbase:

Front: _____ mm

Rear: _____ mm

Center Drive :

- ☐ Diff. Gear ☐ Slipper Clutch
☐ Separates
☐ Direct

- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)

Sway Bar:

- ☐ None
☐ _____ mm

Center Plate:

- ☐ Std.
☐ Aluminum (LAW55)

Rear Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil:

Shock Spring:

in out mm mm

Limiters:

in out mm mm

Shock Length (A):

_____ mm


Shock Top Type:

- ☐ Alu. (UM719/Std) ☐ UM753-1

5.8mm Ball End:


Front: ☐ S ☐ M ☐ L

Rear: ☐ S ☐ M ☐ L



Chassis:

Ride Height:

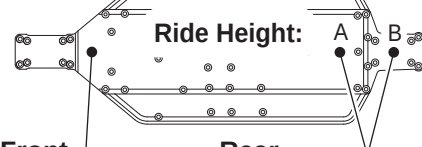

Front _____ mm

Rear _____ mm

☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire:

Compound:

Inserts:

Wheel:

Note:

Electronics:

- Battery:** ☐ Saddle Pack
☐ Short

Motor Position:

- ☐ Front
☐ Rear

Servo Mounting:

- ☐ Straight
☐ Sideways
☐ Aluminum (LAW56)

Motor Mount Position:

- ☐ Std ☐ 8mm Front

Battery Position:

- ☐ Std ☐ 8mm Front

Motor:

Pinion / Spur:

Track Condition

- ☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Traction ☐ Grass
☐ Med. Traction ☐ Blue Groove
☐ Higt Traction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☐ _____

Body / Wing:

Body:

Wing Mount:

Wing Dum Height:

- ☐ Narrow ☐ Wide

_____ mm

Wing:

Wing Angle:

Lip Height:

- ☐ 4° ☐ 7° ☐ 10°

_____ mm

Material:

- Screw:** ☐ Steel ☐ Titanium

Pinion Gear:

- ☐ Steel ☐ Aluminum

Shock O-Ring:

- ☐ O-ring ☐ X-ring ☐ Red ☐ Clear