


Name Chris Nelson Date 2/28/15 Truck / City Trackside - Milwaukee Event Trackside - Milwaukee

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front B in Rear B in

Lower Sus Holder Spacer:

Front .5 mm Rear .5 mm

Comments:

Upper Arm Position:



4.8mm Ball Stud:


☒ 97050M(Std)

☐ UM129

Upper Spacer: 0 mm

Camber 1 °

Spacer: 2 mm

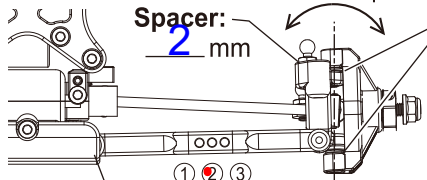

Shock Position:

Axle-Height Spacer:

☐ Up

☒ Down

Caster Block:

☒ 7°

☐ 10°

Wheelbase:

Front 1 mm

Rear mm

Bump Steer Spacer:

4 mm

Toe:

☐ In

☒ Out

0 °

Sway Bar:

☐ None

☒ 1.0 mm

Ackerman Spacer:

2 mm

Front Diff:

☐ Gear Diff. #

☒ Ball Diff. med tight

Rear Suspension:

Shock Position:



Lower Sus Holder Block:


Front A Rear F out

Lower Sus Holder Spacer:

Front 1 mm Rear 2 mm

Comments: Axle spaced w/1mm between hub and hex

Upper Arm Position:



4.8mm Ball Stud:

☒ 97050M(Std)

☐ UM129


Upper Spacer: 0 mm

Camber 1.5 °

Sus. Arm:

☐ LA272(Std)

☒ UM713

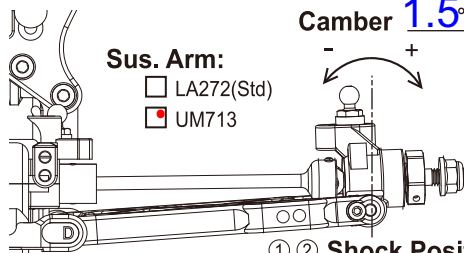


Shock Position:

Wheelbase:

Front: 1 mm

Rear: 3 mm

Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: 2 mm

☒ 0°Type-B(UM519)

☐ 0°Type-B2(UM519-2)

☐ 0°Alu(UMW704-0)

☐ 0.5°Alu(UMW704-05)

☐ 1°Alu(UMW704-1)

Sway Bar:

☐ None

☒ 1.4 mm

Rear Diff:

☐ Gear Diff. #

☒ Ball Diff. med tight

Shock:

Shock Piston: Front 1.6 x 2 Rear 1.7 x 2

Shock Oil: # 35 # 30

Shock Spring: Red White


Limiters: in out mm in out mm

Shock Length(A): 19.5 mm 27 mm

Shock Top Type: ☐ Alu(UM719/Std) ☐ UM753-1


5.8mm Ball End: Front: ☒ S ☐ M ☐ L

Rear: ☐ S ☐ M ☒ L



Chassis:

Ride Height:

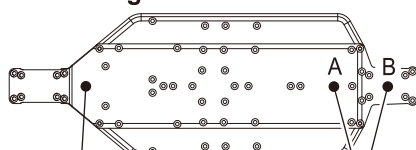

Front 20.5 mm

Rear 20 mm

Tire:

Front

Rear

Tire: Typo-Clay

Chainlinks

Inserts: AKA

AKA

Wheel:

Traction Compound:

Electronics:

Battery: ☐ Saddle Pack

☒ Short

Motor Position: ☒ Front

☐ Rear

Servo Mounting: ☒ Straight

☐ Sideways

Motor: Peak 6.5

Motor Timing:

Pinion/Spur: 19/78

ESC:

Radio:

Servo:

Body / Wing:

Body:

Blade

Wing Mount:

☐ Narrow ☒ Wide

Wing Dum Height:

 mm

Wing:

Wing Angle:

☒ 4° ☐ 7° ☐ 10°

Lip Height:

 mm

Material:

Screw: ☐ Steel ☐ Titanium

Pinion Gear: ☒ Steel ☐ Aluminium

Shock O-Ring: ☐ O-ring ☒ X-ring ☐ Red ☒ Clear

Comment : Motor forward. Battery on the left - speedo, capacitor, receiver on the right.

Tight track/medium grip-black dirt