


Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:




4.8mm Ball Stud:

- ☐
- 97050M(Std)
-
- ☐
- UM129

Upper Spacer: _____ mm

Camber _____°

Spacer: _____ mm

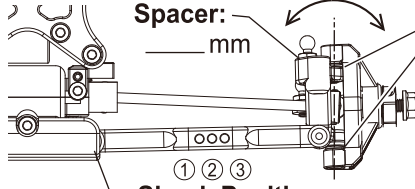

Shock Position:

Axle-Height Spacer:

- ☐
- Up
-
- ☐
- Down

Caster Block:


- ☐
- 7°
-
- ☐
- 10°

Wheelbase:

Front _____ mm

Rear _____ mm

Bump Steer Spacer: _____ mm



Toe:

- ☐
- In
-
- ☐
- Out _____°

Sway Bar:

- ☐
- None
-
- ☐
- _____ mm

Ackerman Spacer: _____ mm



Front Diff:

- ☐
- Gear Diff. # _____
-
- ☐
- Ball Diff. _____

Rear Suspension:

Shock Position:



Wing Stay Position:

Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:


- ☐
- 97050M(Std)
-
- ☐
- UM129

Upper Spacer: _____ mm

Camber _____°

Sus. Arm:

- ☐
- LA272(Std)
-
- ☐
- UM713

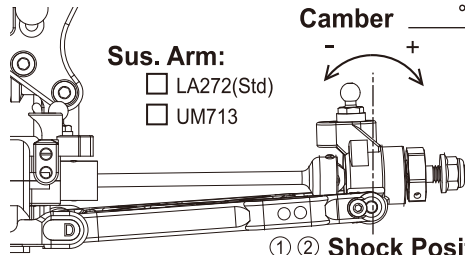


Shock Position:

Wheelbase:

Front: _____ mm

Rear: _____ mm

Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: _____ mm

- ☐
- 0°Type-B(UM519)
-
- ☐
- 0°Type-B2(UM519-2)
-
- ☐
- 0°Alu(UMW704-0)
-
- ☐
- 0.5°Alu(UMW704-05)
-
- ☐
- 1°Alu(UMW704-1)

Sway Bar:

- ☐
- None
-
- ☐
- _____ mm

Rear Diff:

- ☐
- Gear Diff. # _____
-
- ☐
- Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil:

#

#

Shock Spring:

Limiters:

in

out

mm

mm

in

out

mm

mm

Shock Length(A): _____ mm

_____ mm


Shock Top Type: ☐ Alu(UM719/Std) ☐ UM753-1

5.8mm Ball End:

Front:


☐ S☐ M☐ L

Rear:

☐ S☐ M☐ L

Chassis:

Ride Height:

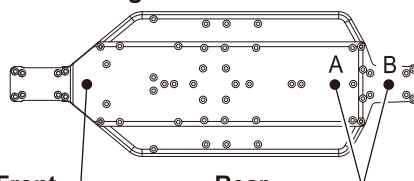

Front _____ mm

Rear

☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire:

Compound:

Inserts:

Wheel:

Notes:

Comment :

Body / Wing:

Body:

Wing Mount:

- ☐
- Narrow
- ☐
- Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- ☐
- 4°
- ☐
- 7°
- ☐
- 10°

Lip Height:

_____ mm

Material:

Screw: ☐ Steel ☐ Titanium

Pinion Gear:

- ☐
- Steel
- ☐
- Aluminium

Shock O-Ring:

- ☐
- O-ring
- ☐
- X-ring
- ☐
- Red
- ☐
- Clear

Electronics:

Battery: ☐ Saddle ☐ ShortMotor Position: ☐ Front☐ RearServo Mounting: ☐ Straight☐ Sideways

Motor: _____

Motor Timing: _____

Pinion/Spur: _____

ESC: _____

Setting: _____

Radio: _____

Servo: _____

☐ Smooth☐ Bumpy☐ Low Traction☐ Med.Traction☐ High Traction☐ Wet☐ Dry☐ Sandy☐ Soft Dirt☐ Grass☐ BlueGroove☐ Clay☐ Dusty☐ _____