


Name Kohta Akimoto Date 2014/08/24 Truck / City CHAMP STUDIUM Event _____

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front in B Rear in B

Lower Sus Holder Spacer:

Front 1.0 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

☒ 97050M(Std)

☐ UM129

Upper Spacer: 0 mm

Camber 1.5 °

Spacer: 1.0 mm

Shock Position:

1 2 3

Axle-Height Spacer:

☐ Up

☒ Down

Caster Block:

☐ 7°

☒ 10°

Wheelbase:

Front 1.0 mm

Rear 0 mm

Bump Steer Spacer:

1.0 mm

Toe:

☐ In

☒ Out 0.5 °

Sway Bar:

☐ None

☒ 1.0 mm

Ackerman Spacer:

0 mm

Front Diff:

☒ Gear Diff. # 4000

☐ Ball Diff.

Rear Suspension:

Shock Position:



Lower Sus Holder Block:

Front in D Rear out D

Lower Sus Holder Spacer:

Front 1.0 mm Rear 0.5 mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

☐ 97050M(Std)

☒ UM129

Upper Spacer: 0 mm

Camber 1.5 °

Sus. Arm:

☒ LA272(Std)

☐ UM713

Hub Carrier:

1 2

Type-B (UM519)

Type-B2 (UM519-2)

3 4

Upper Spacer: 2.0 mm

☐ 0°Type-B(UM519)

☐ 0°Type-B2(UM519-2)

☐ 0°Alu(UMW704-0)

☐ 0.5°Alu(UMW704-05)


☐ 1°Alu(UMW704-1)

Sway Bar:

☐ None

☒ 1.2 mm

※UMW704-0 V2 Aluminum hub 0°

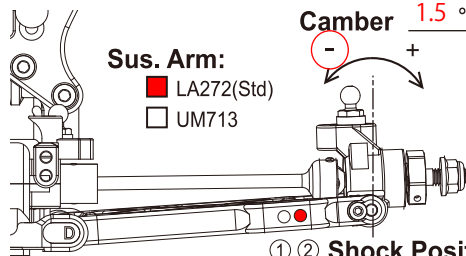

Shock Position:

1 2 3

Wheelbase:

Front: 1.0 mm

Rear: 1.0 mm

Slipper Type:

☒ Separates

☐ Direct

Rear Diff:

☒ Gear Diff. # 4000

☐ Ball Diff.

Shock:

Front

Rear

Shock Piston: 2 x 1.6mm 2 x 1.6mm

Shock Oil: # 30 # 30

Shock Spring: Gold Gold

Limiters: in 0 mm out 0 mm in 0 mm out 0 mm


Shock Length(A): 20.0 mm 28.5 mm

Shock Top Type: ☒ Alu(UM719/Std) ☐ UM753-1

5.8mm Ball End: ☒ S ☐ M ☐ L

Front: ☒ S ☐ M ☐ L


Rear: ☐ S ☒ M ☐ L



Chassis:

Ride Height:

10g

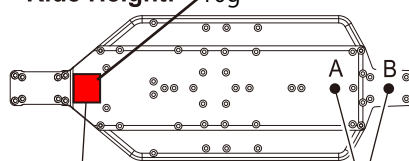

Front 20.0 mm

Rear ☒ A ☐ B 20.0 mm

Tire:

Front

Rear

Tire: Typo clay

Typo clay

Inserts: AKA

AKA

Wheel: EVO

EVO

Traction Compound: _____

Electronics:

Battery: ☐ Saddle Pack

☒ Short

Motor Position: ☐ Front

☒ Rear

Servo Mounting: ☒ Straight

☐ Sideways

Motor: ORION VST2 6.5T

Motor Timing: _____

Pinion/Spur: 20/78

ESC: Much more FLETA PRO

Radio: FUTABA 4PX

Servo: BLS 571 SV

Body / Wing:

Body:

BLADE LW

Wing Mount:

☐ Narrow ☒ Wide

Wing Dum Height:

std line mm

Wing:

Step 3.0 Round

Wing Angle:

☒ 4° ☐ 7° ☐ 10°

Lip Height:

10 mm

Material:

Screw: ☒ Steel ☐ Titanium

Pinion Gear: ☒ Steel ☐ Aluminium

Shock O-Ring: ☐ O-ring ☒ X-ring ☐ Red ☒ Clear

Comment :

LAW50 Gear Diff Set

LAB06LW Light Weight Body