


Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:


- ☐ 97050M(Std)
☐ UM129

Upper Spacer: _____ mm

Camber _____°

Spacer: _____ mm

Shock Position:

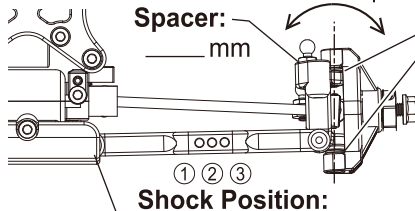

Axle-Height Spacer:

- ☐ Up
☐ Down


Caster Block:

- ☐ 7°
☐ 10°

Wheelbase:

Front _____ mm
Rear _____ mm

Bump Steer Spacer:



Toe:

- ☐ In
☐ Out _____°

Sway Bar:

- ☐ None
☐ _____ mm

Ackerman Spacer:



Front Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Rear Suspension:

Shock Position:



Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129


Upper Spacer: _____ mm

Camber _____°

Sus. Arm:

- ☐ LA272(Std)
☐ UM713

Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)


Upper Spacer: _____ mm

- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)

Sway Bar:

- ☐ None
☐ _____ mm

Toe In: _____°



Wheelbase:

Front: _____ mm
Rear: _____ mm

Slipper Type:

- ☐ Separates ☐ Direct

Rear Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

_____ # _____


Shock Spring:

in out mm in out mm

Shock Length(A): _____ mm _____ mm


Shock Top Type: ☐ Alu(UM719/Std) ☐ UM753-1

5.8mm Ball End:

Front: ☐ S ☐ M ☐ LRear: ☐ S ☐ M ☐ L

Chassis:

Ride Height:

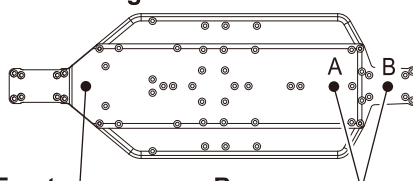

Front _____ mm

Rear ☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire:

Compound: _____

Inserts:

Wheel:

Notes:

Comment :

Electronics:

Battery: ☐ Saddle ☐ ShortMotor Position: ☐ Front
☐ RearServo Mounting: ☐ Straight
☐ Sideways

Motor: _____

Motor Timing: _____

Pinion/Spur: _____

ESC: _____

Setting: _____

Radio: _____

Servo: _____

- | | |
|--|-------------------------------------|
| ☐ Smooth | ☐ Sandy |
| ☐ Bumpy | ☐ Soft Dirt |
| ☐ Low Traction | ☐ Grass |
| ☐ Med.Traction | ☐ BlueGroove |
| ☐ High Traction | ☐ Clay |
| ☐ Wet | ☐ Dusty |
| ☐ Dry | ☐ _____ |

Body / Wing:

Body:

Wing Mount:

- ☐ Narrow ☐ Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- ☐ 4° ☐ 7° ☐ 10°

Lip Height:

_____ mm

Material:

Screw: ☐ Steel ☐ TitaniumPinion Gear: ☐ Steel ☐ AluminiumShock O-Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear