


Name _____ Date _____ Track / City _____ Event _____

Front Suspension:

Shock Position:



Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:


- ☐ 97050M(Std)
☐ UM129

Upper Spacer: _____ mm

Camber _____ °

- +

Spacer: _____ mm

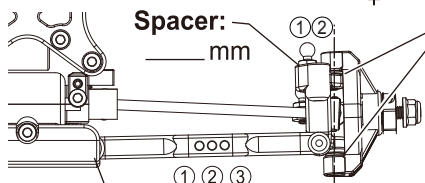

Shock Position:

Axle-Height Spacer:

- ☐ Up
☐ Down

Caster Block:


- ☐ 7°
☐ 10°

Wheelbase:

Front _____ mm

Rear _____ mm

Bump Steer Spacer: _____ mm



Toe:

- ☐ In
☐ Out _____ °

Sway Bar:

- ☐ None
☐ _____ mm

Ackerman Spacer: _____ mm



Front Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Rear Suspension:

Shock Position:



Lower Sus Holder Block:


Front _____ Rear _____

Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Comments: _____

Upper Arm Position:



4.8mm Ball Stud:

- ☐ 97050M(Std)
☐ UM129


Upper Spacer: _____ mm

Camber _____ °


- +

Sus. Arm:

- ☐ LA272(Std)
☐ UM713
☐ _____

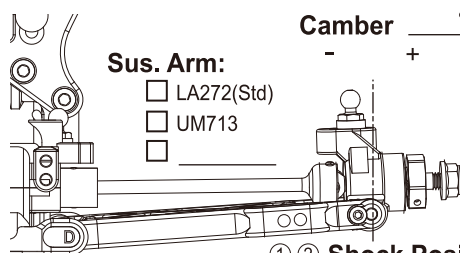

Shock Position:




Wheelbase:

Front: _____ mm

Rear: _____ mm


Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

Upper Spacer: _____ mm



- ☐ 0°Type-B(UM519)
☐ 0°Type-B2(UM519-2)
☐ 0°Alu(UMW704-0)
☐ 0.5°Alu(UMW704-05)
☐ 1°Alu(UMW704-1)
☐ _____

Sway Bar:

- ☐ None
☐ _____ mm

Slipper Type:

- ☐ Separates ☐ Direct

Rear Diff:

- ☐ Gear Diff. # _____
☐ Ball Diff. _____

Shock:

Front

Rear

Shock Piston:

Shock Oil: # _____ # _____

Shock Spring:

Limiters: in out mm in out mm in out mm


Shock Length(A): _____ mm _____ mm

Shock Top Type: ☐ Alu(UM719/Std) ☐ UM753-1

5.8mm Ball End:


Front: ☐ S ☐ M ☐ L

Rear: ☐ S ☐ M ☐ L



Chassis:

Ride Height:

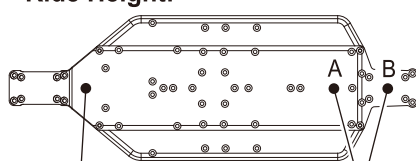

Front _____ mm

Rear ☐ A ☐ B _____ mm

Tire:

Front

Rear

Tire: _____

Compound: _____

Inserts: _____

Wheel: _____

Notes: _____

Comment :

Electronics:

Battery: ☐ Saddle ☐ Short

Motor Position: ☐ Front
☐ Rear

Servo Mounting: ☐ Straight
☐ Sideways

Motor: _____

Motor Timing: _____

Pinion/Spur: _____

ESC: _____

Setting: _____

Radio: _____

Servo: _____

Body / Wing:

Body:

Wing Mount:

- ☐ Narrow ☐ Wide

Wing Dum Height:

_____ mm

Wing:

Wing Angle:

- ☐ 4° ☐ 7° ☐ 10°

Lip Height:

_____ mm

Material:

Screw: ☐ Steel ☐ Titanium

Pinion Gear: ☐ Steel ☐ Aluminium

Shock O-Ring: ☐ O-ring ☐ X-ring ☐ Red ☐ Clear

- ☐ Smooth ☐ Sandy
☐ Bumpy ☐ Soft Dirt
☐ Low Traction ☐ Grass
☐ Med.Traction ☐ BlueGroove
☐ High Traction ☐ Clay
☐ Wet ☐ Dusty
☐ Dry ☐ _____